Specification Sheet

BELLEDOR
631.30.300.xxx-AA
Washbasin 3-hole mixer ½“

- with porcelain handles
- spout projection 145 mm
- height 215 mm
- fixed spout
- aerator M18,5 x 1
- 2 side valves with ceramic internal upper part ½“, clockwise and counter-clockwise closure
- push-open waste 1 ¼“
- 2 flexible hoses M10 x 1 x ½“ x 150 mm

Recommended:

- **2x 649.15.530.xxx |** copper tube 300 mm

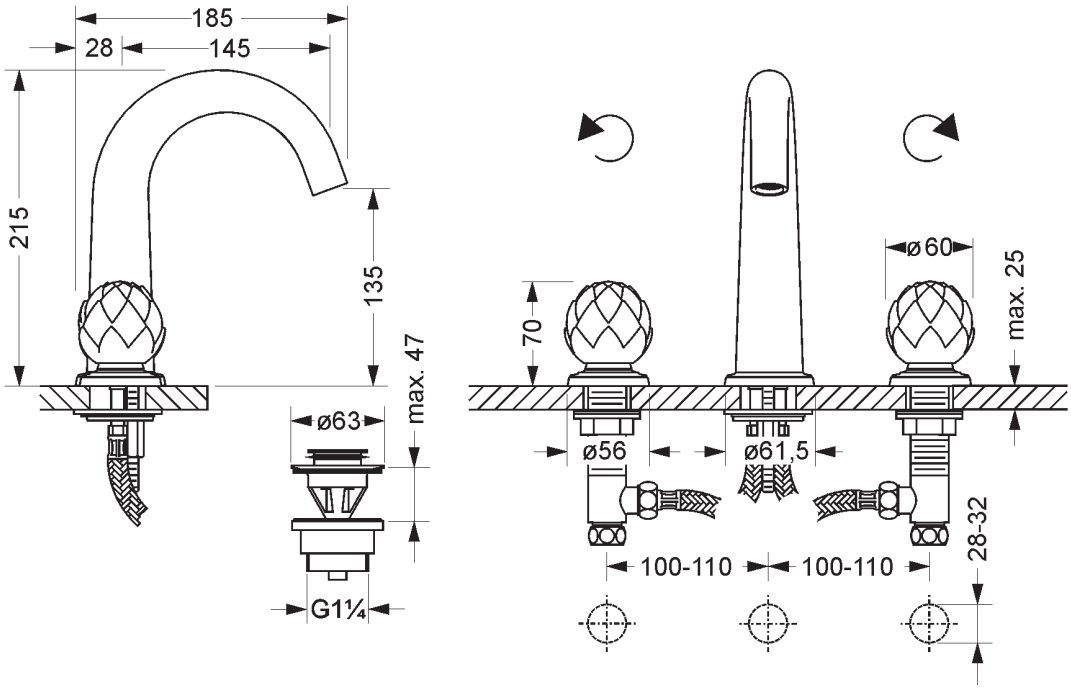

Specification Sheet

BELLEDOR
631.10.300.xxx-AA
Washbasin 1-hole mixer ½“

- with porcelain handles
- spout projection 105 mm
- height 145 mm
- fixed spout
- aerator M24 x 1
- 2 cartridges ½“ with ceramic discs, right/left closure
- pop-up waste 1 ¼“
- 2 copper tubes M10x1 x 400 mm

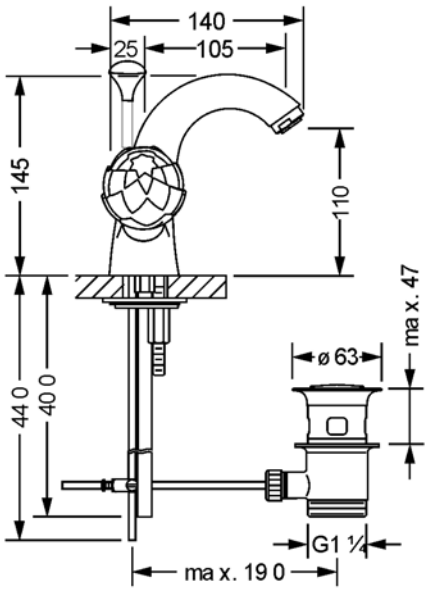

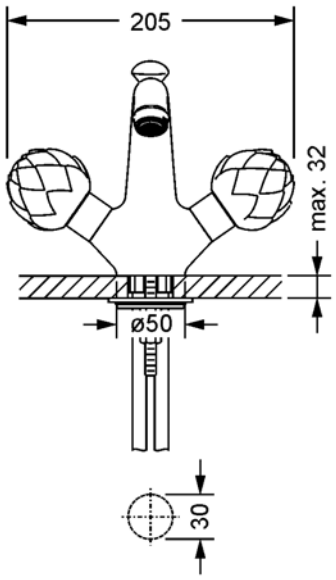

Specification Sheet

BELLEDOR
631.30.360.xxx-AA
Wall washbasin 3-hole mixer, assembly set ½“

- wall mounting
- with porcelain handles
- wall spout
- projection 210 mm
- aerator M18,5 x 1
- design handle, socket with adjustable, escutcheon
- cartridges with ceramic discs ½“

Required:

- **649.30.380.000 |** Wall washbasin 3-hole mixer ½“, concealed body

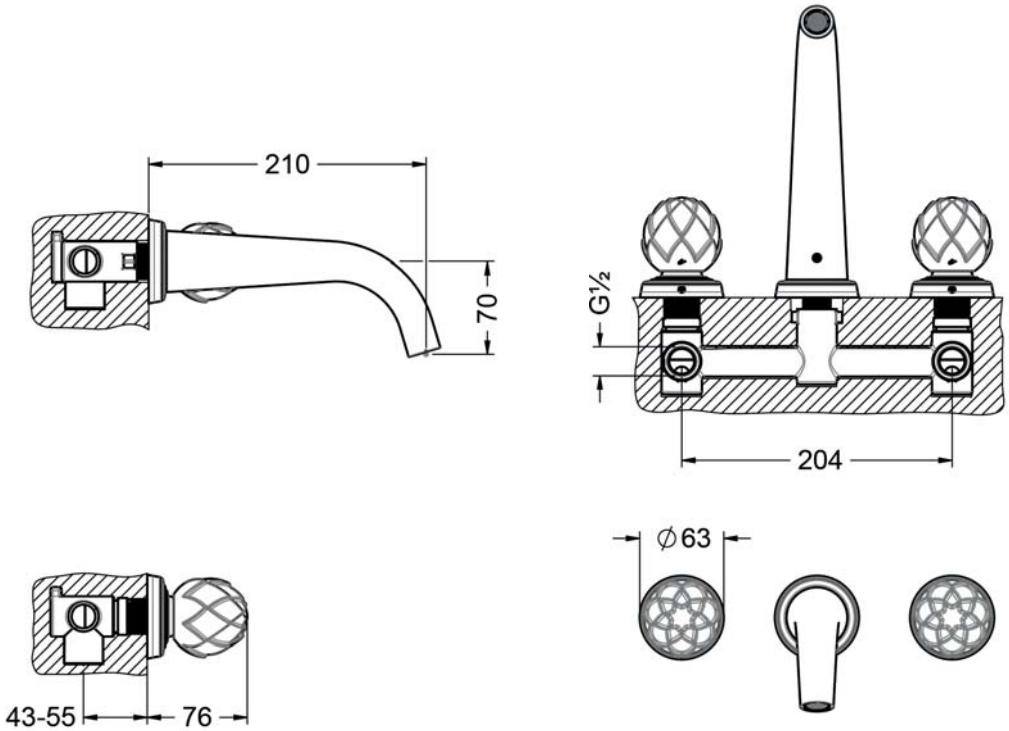

Specification Sheet

BELLEDOR
649.30.380.000
Wall washbasin 3-hole mixer, concealed body ½“

· 2 connections ½“, center distance 204 mm
· for assembly set XXX.30.360.xxx and XXX.30.365.xxx

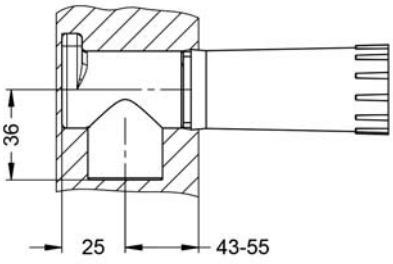

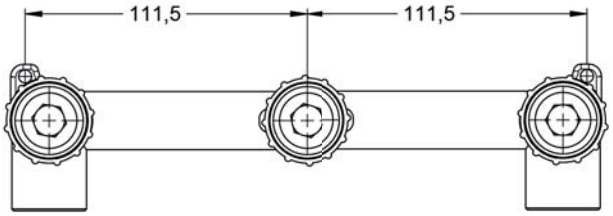

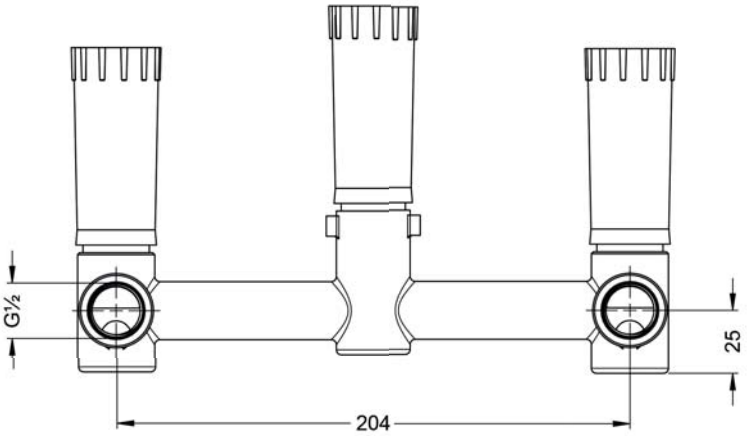

Specification Sheet

BELLEDOR
631.10.100.xxx-AA
Bidet 1-hole mixer ½“

- with porcelain handles
- spout projection 75 mm
- height 95 mm
- fixed spout
- aerator M24x1 with ball joint
- ceramic internal upper part ½“
- pop-up waste 1 ¼“
- 2 pressure hoses M10x1 x 450 mm

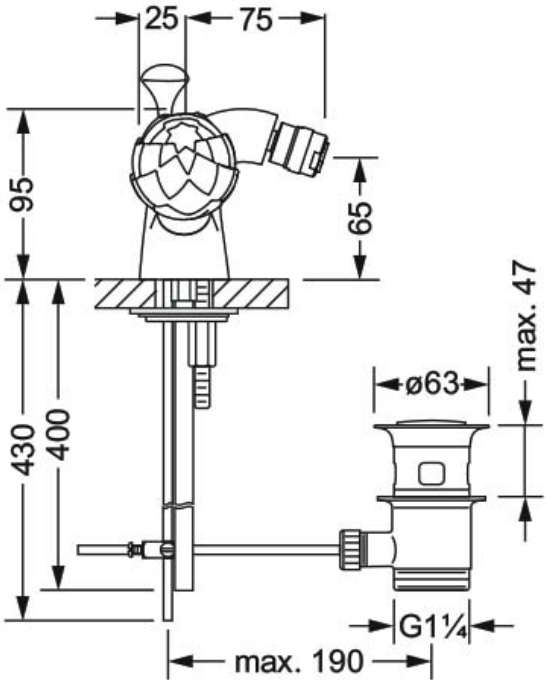

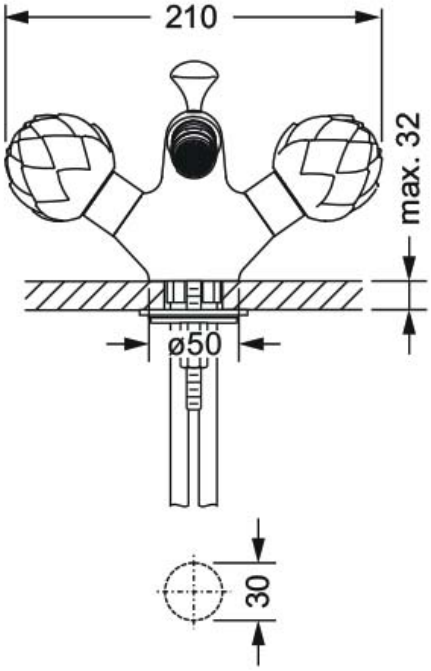

Specification Sheet

BELLEDOR
631.12.100.xxx-AA
Angle valve ½“

- wall mounting
- with porcelain handle
- projection 135 mm
- cartridge ½“
- compression joint ½“
- escutcheon

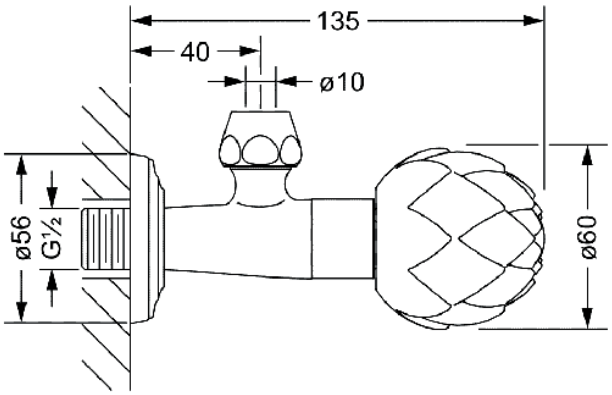

Specification Sheet

BELLEDOR
649.15.530.xxx
Copper tube, 300 mm

- with flange
- for compression joint

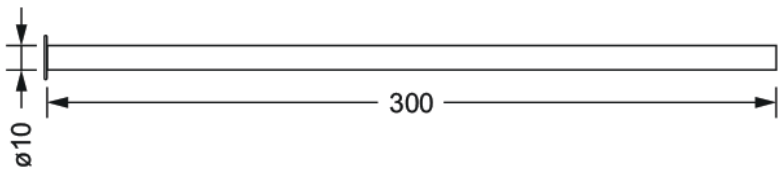

Specification Sheet

BELLEDOR
649.15.550.xxx
Copper tube, 500 mm

- with flange
- for compression joint

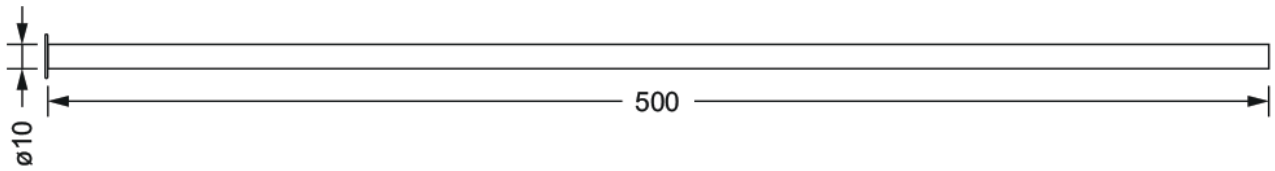

Specification Sheet

BELLEDOR
649.15.340.xxx
Washbasin cupped siphon trap 1 ¼“

- wall mounting
- heavy metal
- escutcheon
- outlet tube ø 32 mm
- siphon depth 165 mm

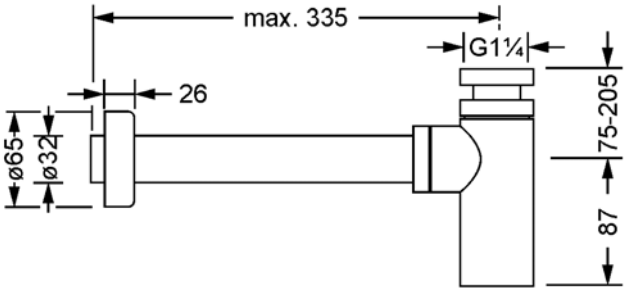

Specification Sheet

BELLEDOR
649.15.330.xxx
Bidet cupped siphon trap 1 ¼“

- wall mounting
- heavy brass
- escutcheon
- outlet tube ø 32 mm

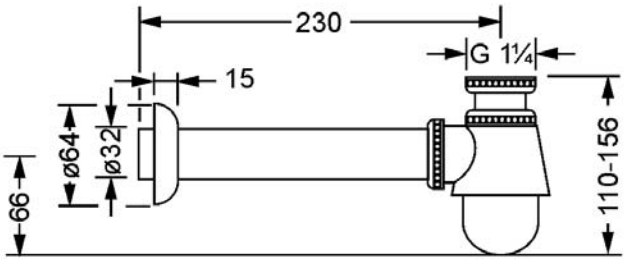

Specification Sheet

BELLEDOR
631.40.100.xxx-AA
Tub/shower mixer set deck mount ½“

- with porcelain handles
- spout projection 215 mm
- height 260 mm
- aerator M24x1
- fixed spout
- automatic tub/shower diverter
- 2 side valves, ceramic internal upper parts ½“
- metal shower hose 2.000 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 18 l/min at 3 bar

Recommended:

- **649.40.160.000 |** Assembly plate, complete

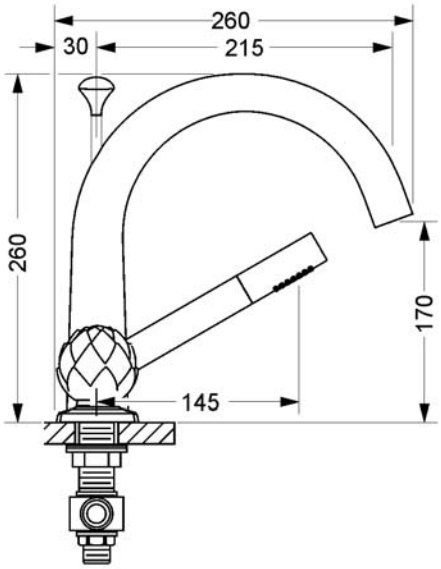

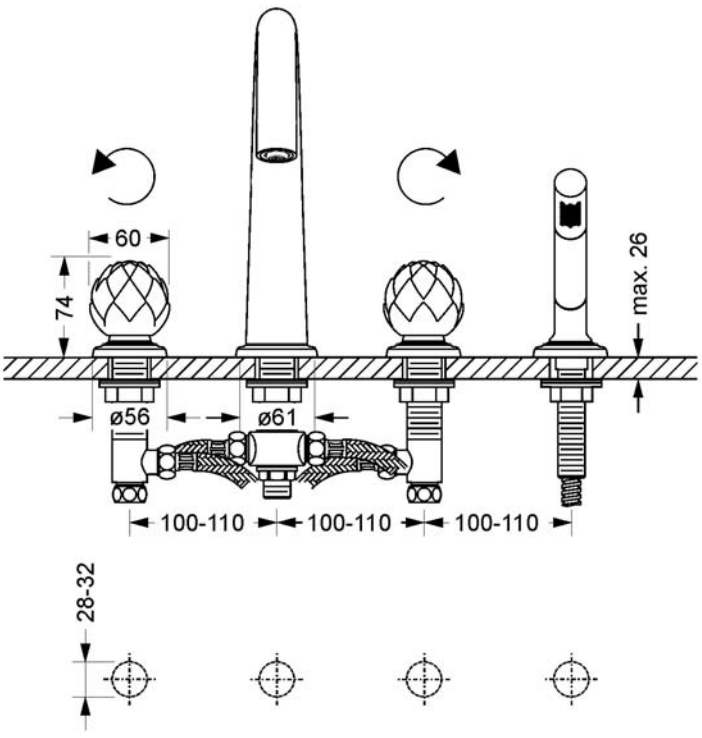

Specification Sheet

BELLEDOR
631.40.105.xxx-AA
Tub/shower mixer set deck mount ½“

- with porcelain handles
- spout projection 215 mm
- height 260 mm
- aerator M24 x 1
- fixed spout
- automatic tub/shower diverter
- 2 side valves, ceramic internal upper parts ½“
- metal shower hose 2.000 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar

Recommended:

- **649.40.160.000 |** Assembly plate, complete

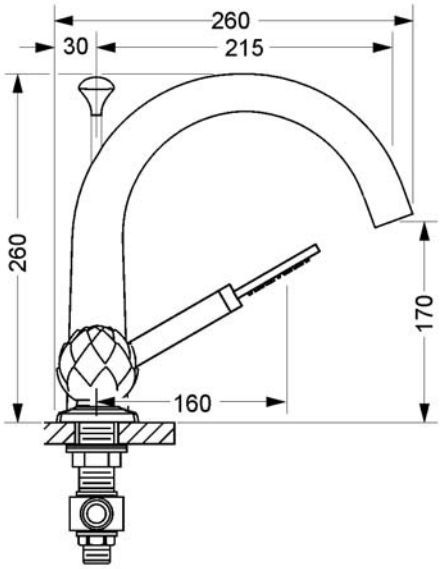

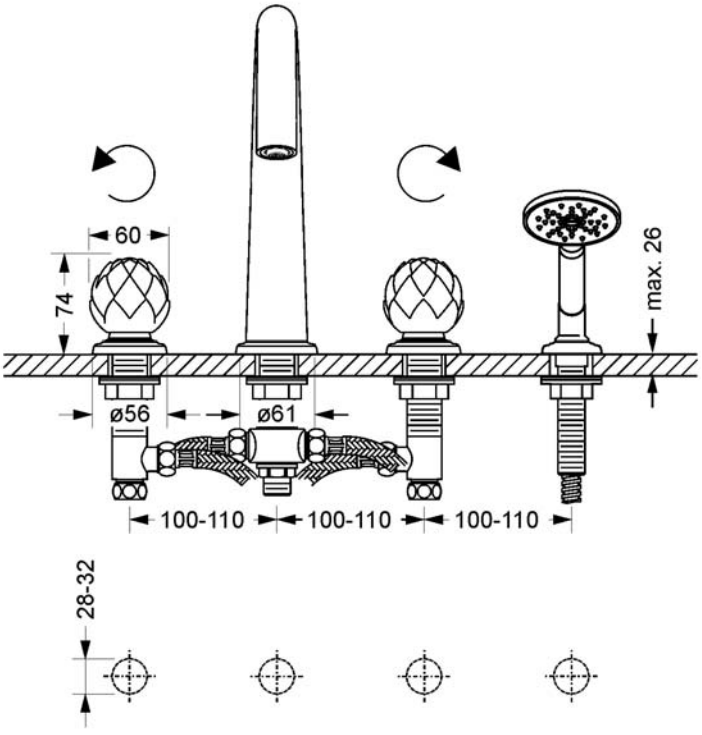

Specification Sheet

BELLEDOR
631.40.150.xxx-AA
Tub/shower combination ½“

- with porcelain handles
- for waste and overflow set with bath tub filler spout, without pipe interrupter
- 2 side valves, ceramic internal upper parts ½“, 2-position diverter
- metal shower hose 2000 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 18 l/min at 3 bar

Recommended:

- **649.40.160.000 |** Assembly plate, complete

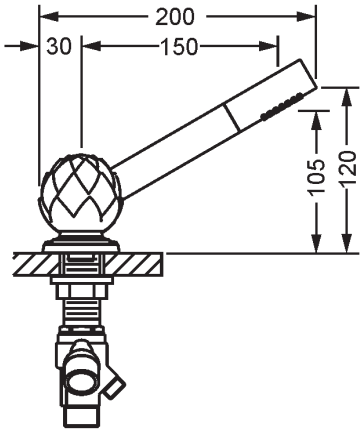

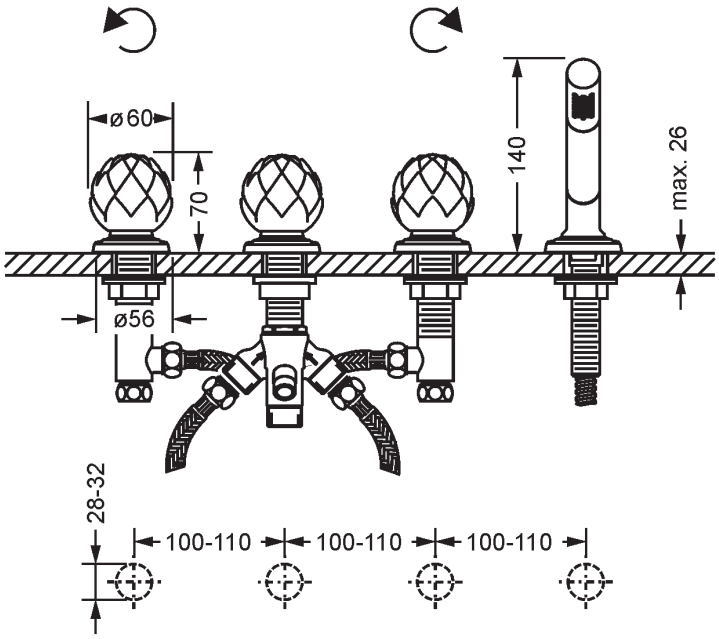

Specification Sheet

BELLEDOR
631.40.155.xxx-AA
Tub/shower combination ½“

- with porcelain handles
- for waste and overflow set with bath tub filler spout, without pipe interrupter
- 2 side valves, ceramic internal upper parts ½“, 2-position diverter
- metal shower hose 2000 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar

Recommended:

- **649.40.160.000 |** Assembly plate, complete

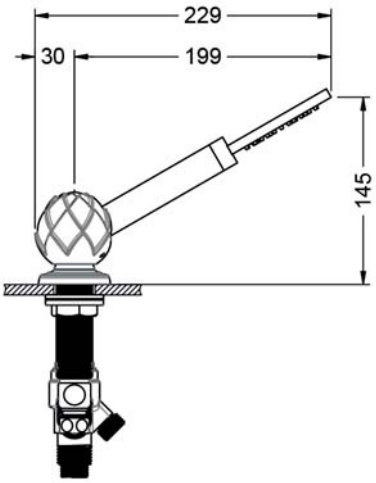

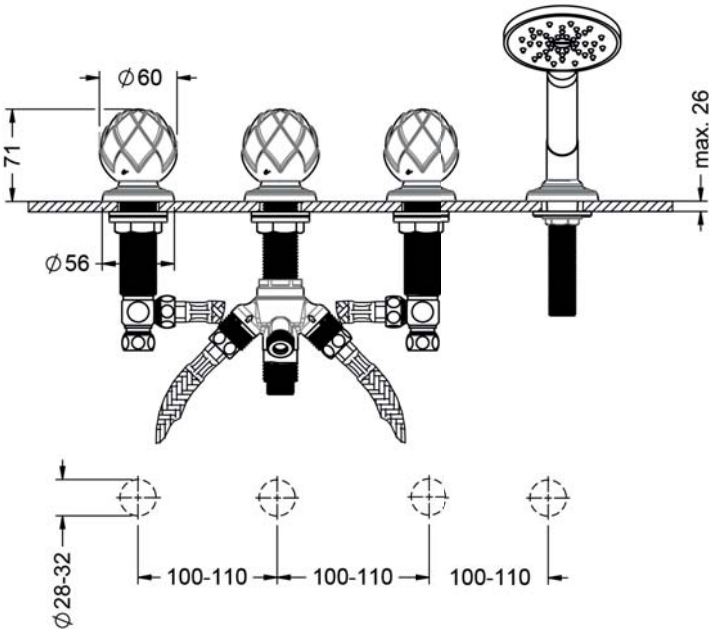

Specification Sheet

BELLEDOR
649.40.160.000
Assembly plate module

- installation under tiles or bath rim
- dimensions 680 x 150 mm
- complete metal plate with mounting elements
- recommended hose box system 649.40.150.000, 649.40.170.000

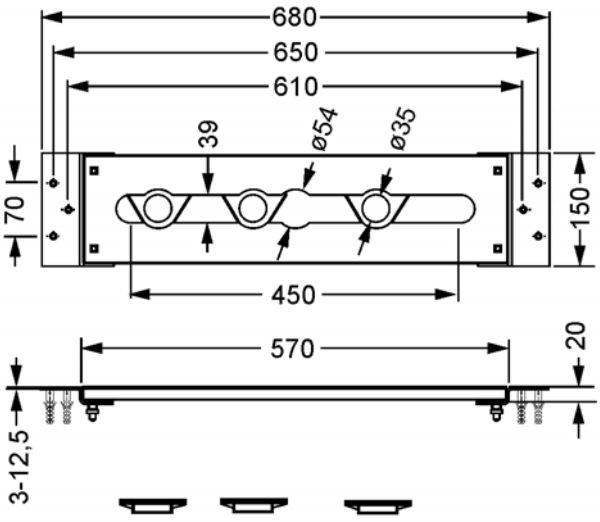

Specification Sheet

BELLEDOR
631.20.100.xxx-AA
Exposed tub/shower mixer, inclusive shower set ½“

- wall mounting
- with porcelain handles
- spout projection 295 mm
- aerator M24 x 1
- fixed spout
- tub/shower diverter
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 18 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- ceramic internal upper parts ½“
- concealed S-connections ½“ x ¾“

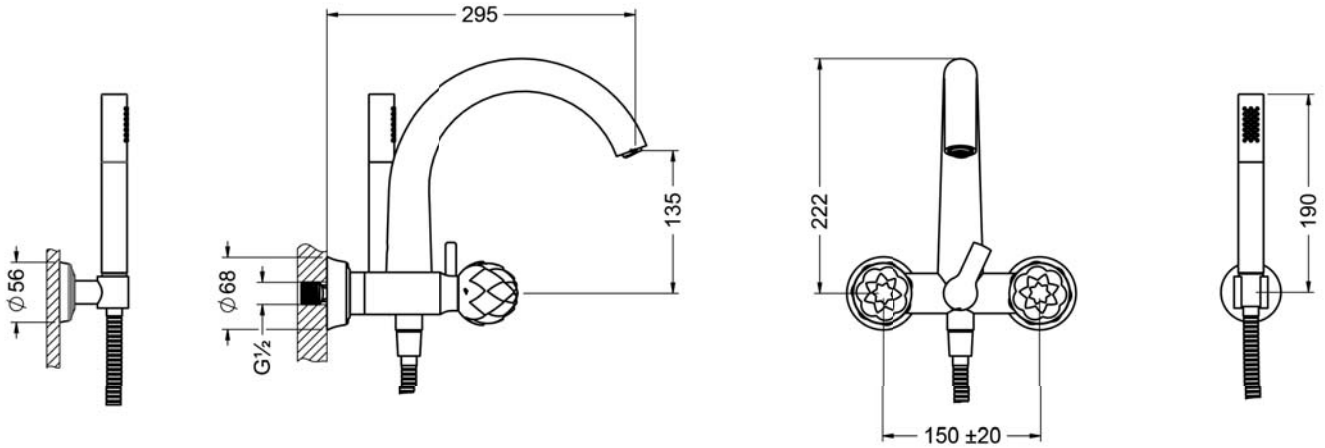

Specification Sheet

BELLEDOR
631.20.105.xxx-AA
Exposed tub/shower mixer, inclusive shower set ½“

- wall mounting
- with porcelain handles
- spout projection 295 mm
- aerator M24 x 1
- tub/shower diverter
- non-swiveling spout
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm
- cartridge with ceramic discs ½“
- concealed S-connections ½“ x ¾“

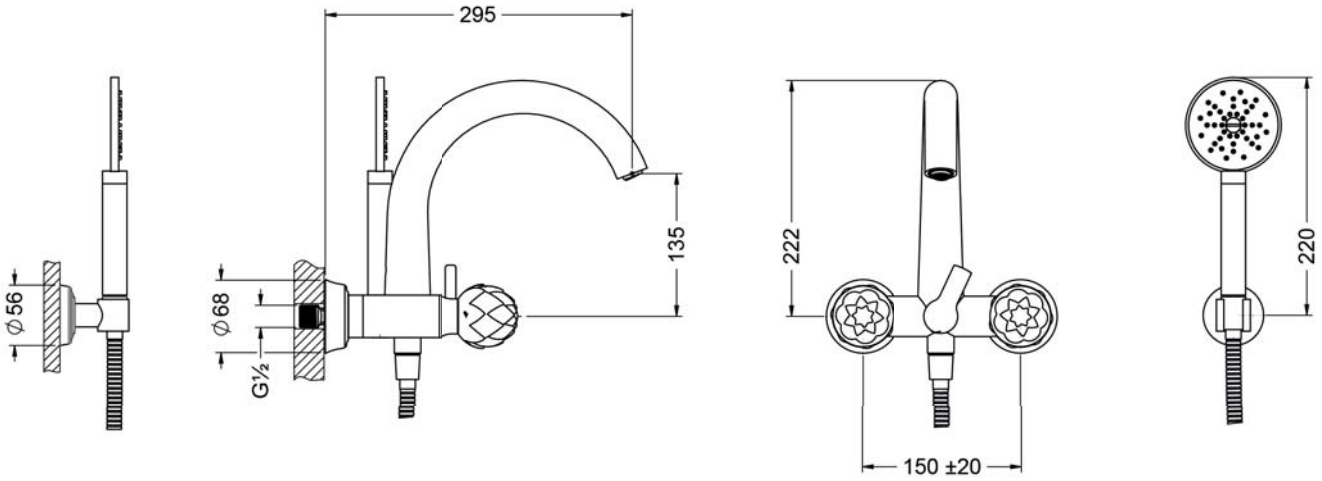

Specification Sheet

BELLEDOR
631.20.150.xxx-AA
Tub/shower mixer for supply pipes, inclusive shower set ½“

- free standing assembly
- with porcelain handles
- spout projection 215 mm
- aerator M24x1
- fixed spout
- flow rate of the spout 20 l/min at 3 bar
- tub/shower diverter
- ceramic internal upper part ½“
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 18 l/min at 3 bar
- metal shower hose 1500 mm
- pillar tube with flange
- height 905 mm
- aerator height 814 mm

Required:

- **649.10.970.000 |** Assembly set for pre-installation

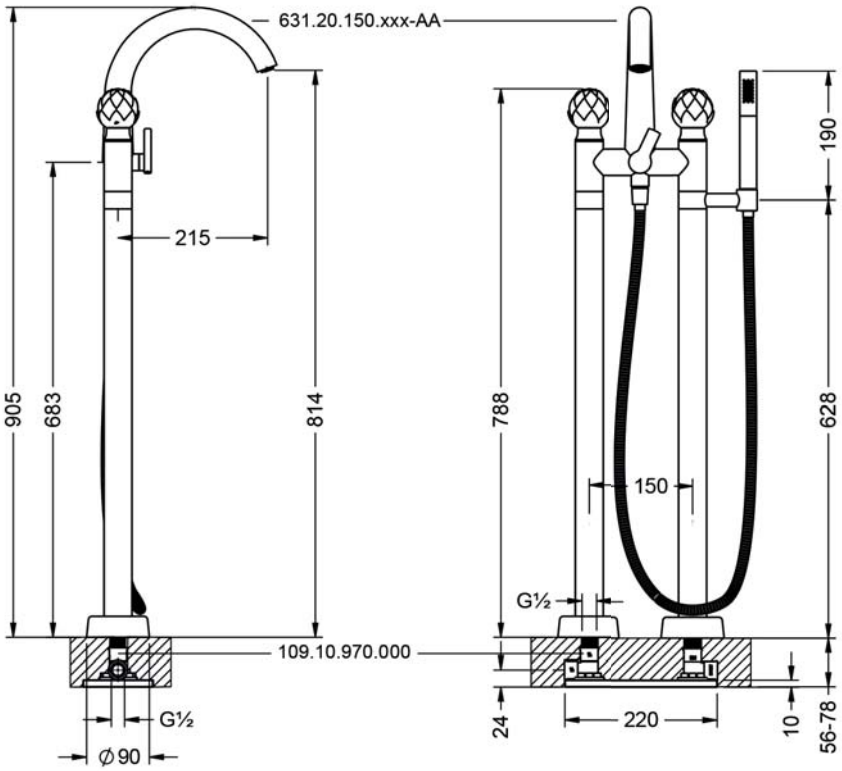

Specification Sheet

BELLEDOR
631.20.155.xxx-AA
Tub/shower mixer for supply pipes, inclusive shower set ½“

- free standing assembly
- with porcelain handles
- spout projection 215 mm
- aerator M24x1
- fixed spout
- flow rate of the spout 20 l/min at 3 bar
- tub/shower diverter
- ceramic internal upper part ½“
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm
- pillar tube with flange
- height 905 mm
- aerator height 814 mm

Required:

- **649.10.970.000 |** Assembly set for pre-installation

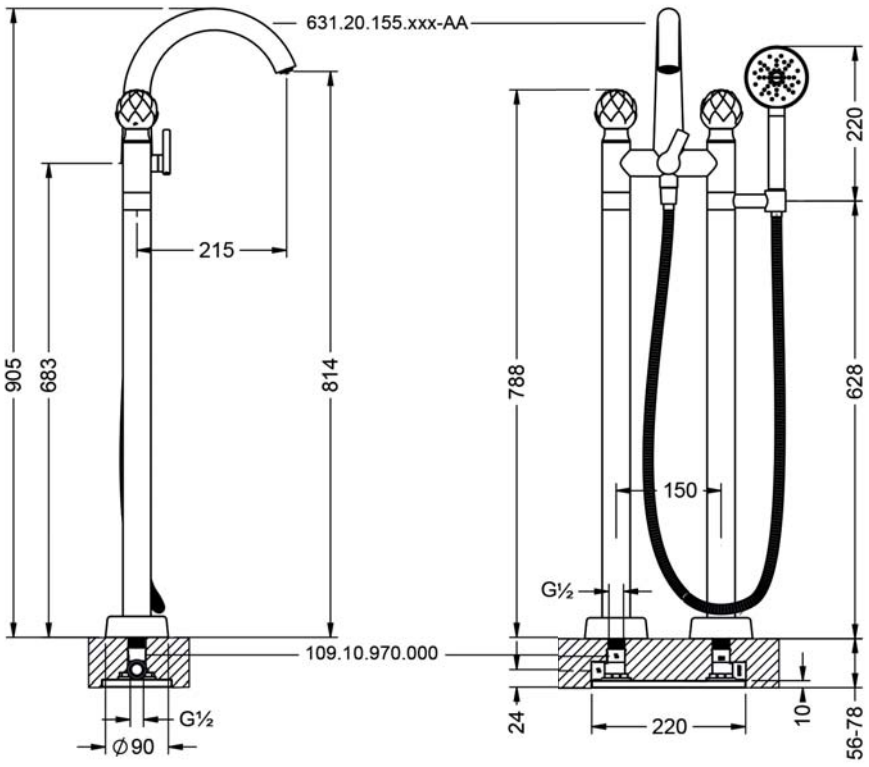

Specification Sheet

BELLEDOR
109.10.970.000
Assembly set for pre-installation

· joint plate with fixing set for water supply pipes
XXX.15.260.xxx



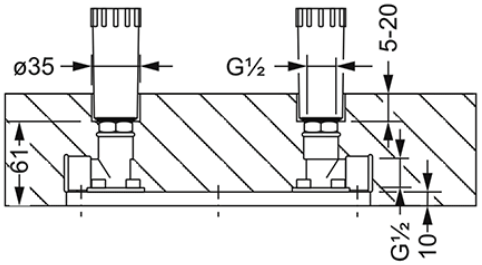

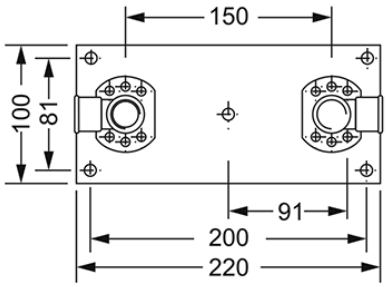

Specification Sheet

BELLEDOR
631.11.100.xxx
Tub wall spout ½“

- wall mounting
- spout projection 210 mm
- aerator M18,5x1
- fixed spout
- special concealed wall attachment

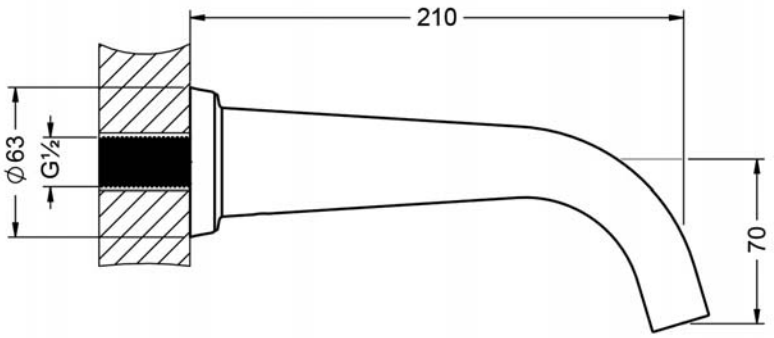

Specification Sheet

BELLEDOR
631.20.200.xxx-AA
Exposed shower mixer ½“

- wall mounting
- with porcelain handles
- 2 ceramic internal upper part ½“
- discharge ½“
- concealed S-connections ½“ x ¾“

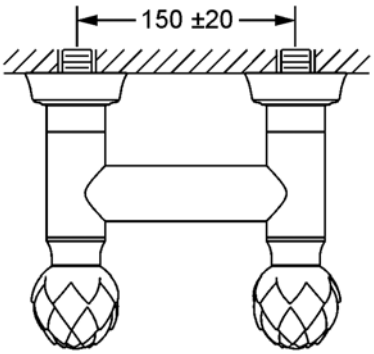

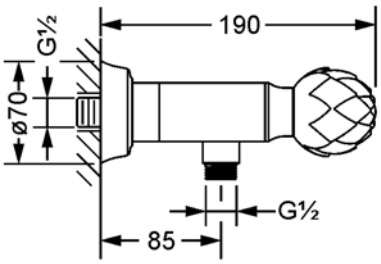



Specification Sheet

BELLEDOR
631.20.250.xxx-AA
Exposed shower thermostat ½“

- wall mounting
- porcelain handle
- cartridge with thermoelement
- locking device at 38 °C
- ceramic cartridge ½“

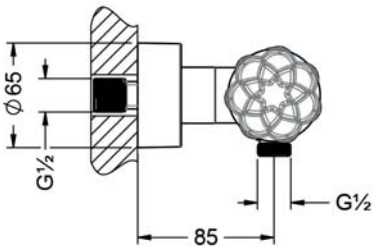

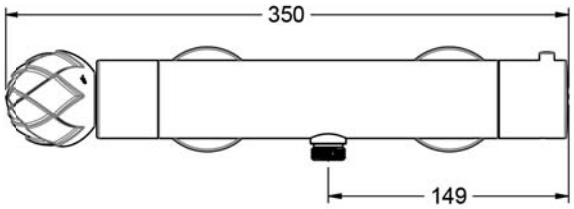

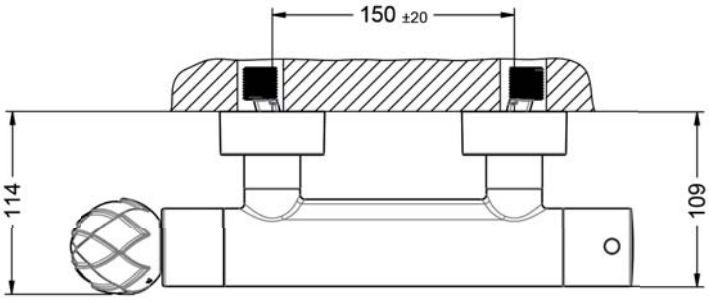

Specification Sheet

BELLEDOR
631.20.410.xxx-AA
Exposed set with shower system ½“

- rain shower head ½“, ø 240 mm
- flow rate of the rain shower head 11 l/min at 3 bar
- full metal body, 3 mm ultra-thin, with ball joint and anticalcareous system
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 360-380 mm
- fitting for hand shower adjustable in height and inclination
- shower combination, metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 18 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower mixer for supply pipe ½“ with porcelain handles
- 2 ceramic internal upper parts ½“
- discharge ¾“
- concealed S-connections ½“ x ¾“

Consisting of:

- **649.13.844.xxx |** Rain shower head ½“, ø 240 mm
- **649.20.210.xxx |** Supply pipe, diverter, wall bracket
- **630.13.700.xxx |** Shower combination
- **631.20.210.xxx-AA |** Exposed shower mixer ½“

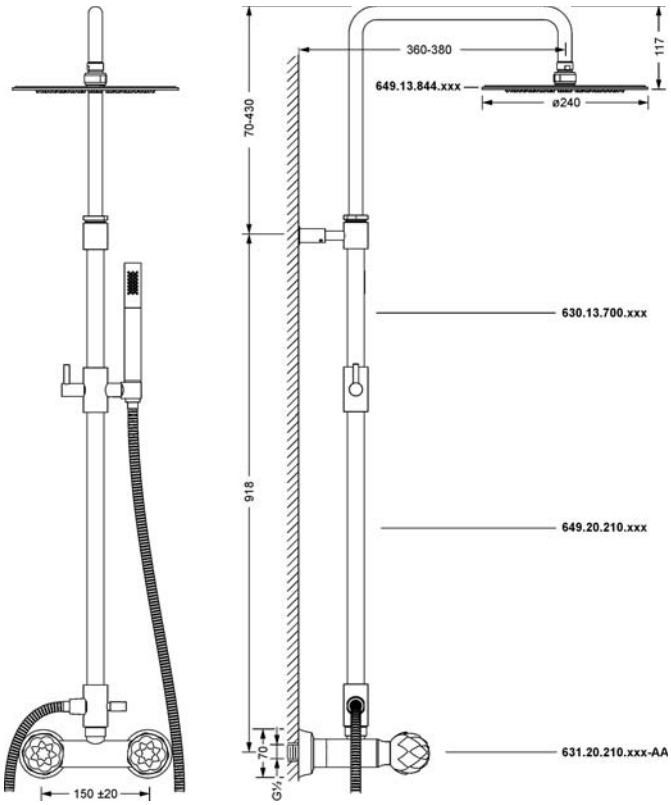

Specification Sheet

BELLEDOR
631.20.415.xxx-AA
Exposed set with shower system ½“

- rain shower head ½“, ø 240 mm
- flow rate of the rain shower head 11 l/min at 3 bar
- full metal body, 3 mm ultra-thin, with ball joint and anticalcareous system
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 360-380 mm
- fitting for hand shower adjustable in height and inclination
- shower combination, metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower mixer for supply pipe ½“ with porcelain handles
- 2 ceramic internal upper parts ½“
- discharge ¾”
- concealed S-connections ½“ x ¾”

Consisting of:

- **649.13.844.xxx |** Rain shower head ½“, ø 240 mm
- **649.20.210.xxx |** Supply pipe, diverter, wall bracket
- **632.13.705.xxx |** Shower combination
- **631.20.210.xxx-AA |** Exposed shower mixer ½“

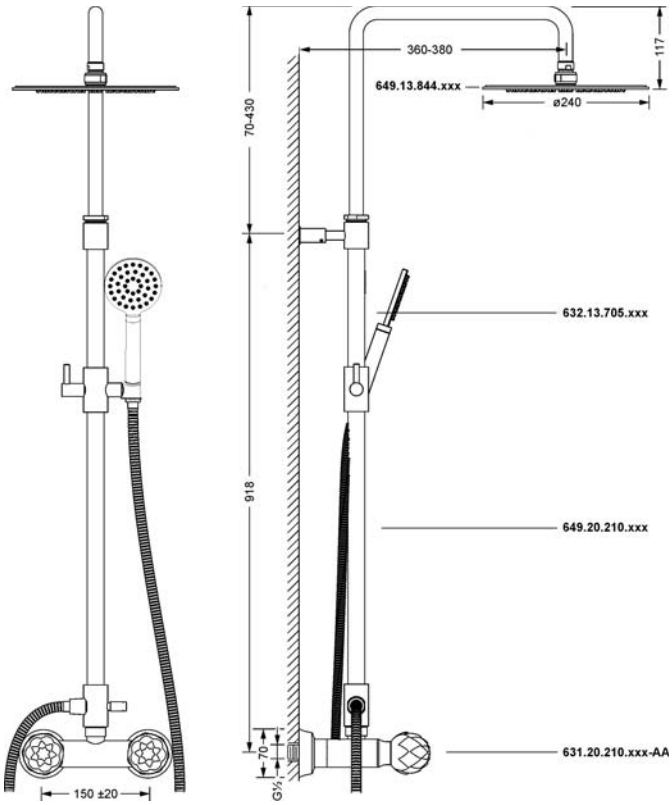

Specification Sheet

BELLEDOR
631.20.460.xxx-AA
Exposed thermostat-set with shower system ½“

- rain shower head ½“, ø 240 mm
- flow rate of the rain shower head 11 l/min at 3 bar
- full metal body, 3 mm ultra-thin, with ball joint and anticalcareous system
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 360-380 mm
- fitting for hand shower adjustable in height and inclination
- shower combination, metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 18 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower thermostat for supply pipe ½“ with porcelain handle
- cartridge with thermoelement
- locking device at 38 °C
- ceramic cartridge ½“
- concealed S-connections ½“ x ¾“

Consisting of:

- **649.13.844.xxx |** Rain shower head ½“, ø 240 mm
- **649.20.210.xxx |** Supply pipe, diverter, wall bracket
- **632.13.700.xxx |** Shower combination
- **631.20.260.xxx-AA |** Exposed shower thermostat ½“

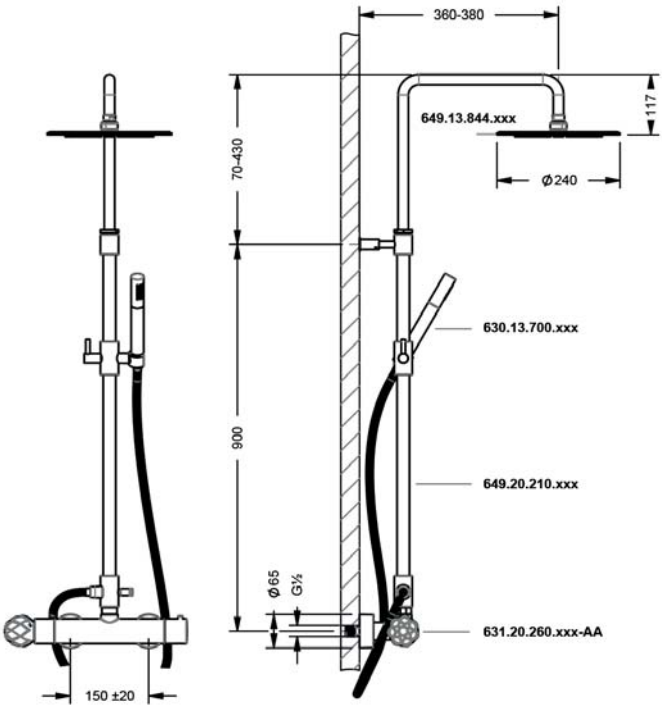

Specification Sheet

BELLEDOR
631.20.465.xxx-AA
Exposed thermostat-set with shower system ½"

- rain shower head ½", ø 240 mm
- flow rate of the rain shower head 11 l/min at 3 bar
- full metal body, 3 mm ultra-thin, with ball joint and anticalcareous system
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 360-380 mm
- fitting for hand shower adjustable in height and inclination
- shower combination, metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower thermostat for supply pipe ½" with porcelain handle
- cartridge with thermoelement
- locking device at 38 °C
- ceramic cartridge ½"
- concealed S-connections ½" x ¾"

Consisting of:

- **649.13.844.xxx |** Rain shower head ½", ø 240 mm
- **649.20.210.xxx |** Supply pipe, diverter, wall bracket
- **632.13.705.xxx |** Shower combination
- **631.20.260.xxx-AA |** Exposed shower thermostat ½"

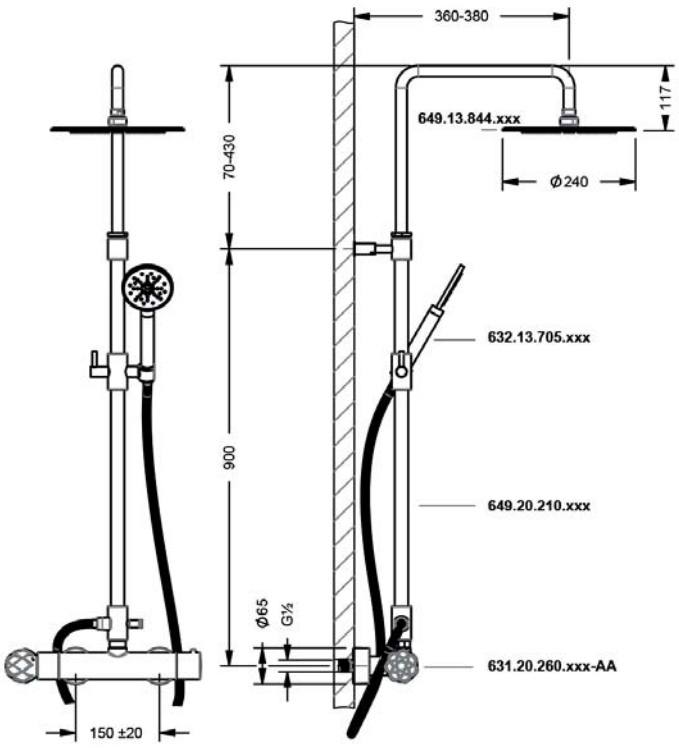

Specification Sheet

BELLEDOR
631.20.125.xxx-AA
Concealed single lever wall tub and shower mixer, assembly set ½“

- porcelain handle
- manual two way diverter with ceramic cartridge for pressure-independent function
- with safety device
- functional unit with diverter
- flow rate 21 l/min at 3 bar

Required:

- **649.40.360.000 |** Concealed wall box ½“





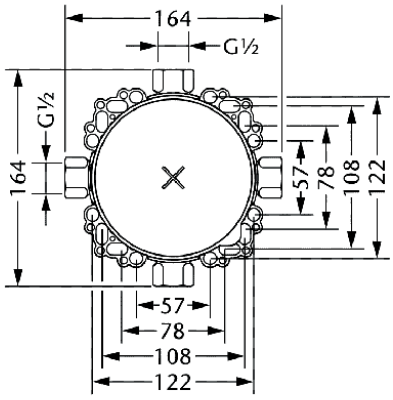

Specification Sheet

BELLEDOR
631.20.135.xxx-AA
Concealed single lever wall tub and shower mixer, assembly set ½“

- porcelain handle
- manual two way diverter with ceramic cartridge for pressure-independent function
- without safety device
- functional unit with diverter
- flow rate 21 l/min at 3 bar

Required:

- **649.40.360.000 |** Concealed wall box ½“





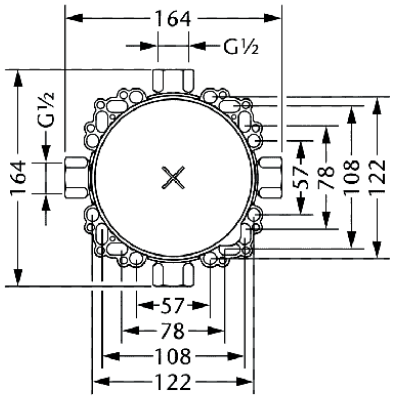

Specification Sheet

BELLEDOR
631.20.235.xxx-AA
Concealed single lever shower mixer, assembly set ½“

- porcelain handle
- functional unit with ceramic discs
- without diverter
- flow rate 20,4 l/min at 3 bar

Required:

- **649.40.360.000 |** Concealed wall box ½“





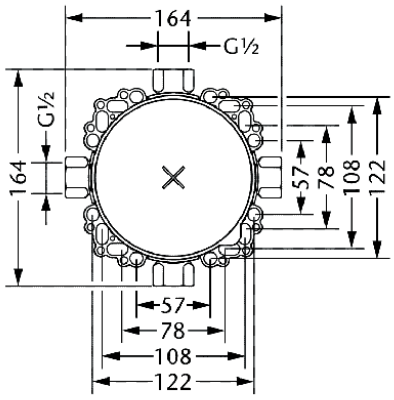

Specification Sheet

BELLEDOR
631.40.380.xxx-AA
Concealed wall thermostat with flow control, assembly set ½“

- porcelain handle
- manual two way diverter with ceramic cartridge for pressure-independent function
- with integrated volume controln
- with safety device
- flow rate 20,4 l/min at 3 bar

Required:
- **649.40.360.000 |** Concealed wall box ½“





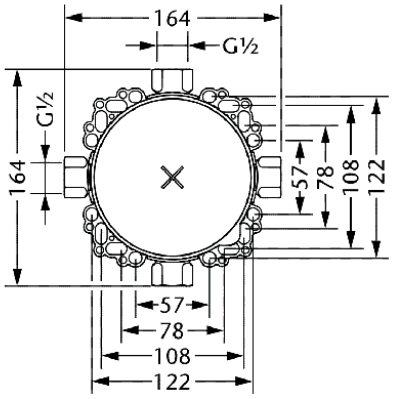

Specification Sheet

BELLEDOR
631.40.360.xxx-AA
Concealed wall thermostat with flow control, assembly set ½“

- porcelain handle
- without diverter
- with integrated ceramic cartridge for volume control
- flow rate 20,4 l/min at 3 bar

Required:

- **649.40.360.000 |** Concealed wall box ½“





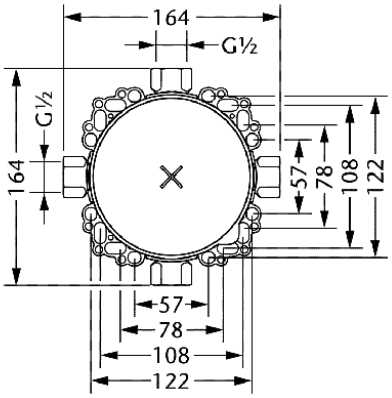

Specification Sheet

BELLEDOR
631.40.460.xxx-AA
Concealed wall thermostat without flow control, assembly set ½“

- porcelain handle
- functional unit without diverter
- without shut-off
- without flow control
- flow rate 28,5 l/min at 3 bar

Required:
- **649.40.360.000 |** Concealed wall box ½“





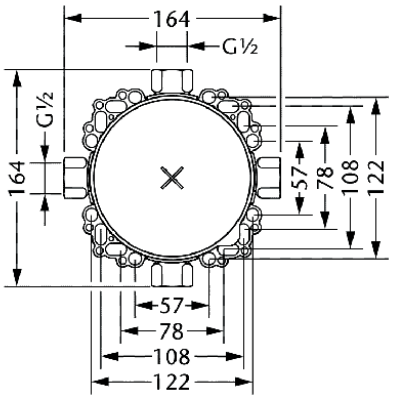

Specification Sheet

BELLEDOR
649.20.612.000
Connection adapter ½“

· connection adapter, end plug
· for connection 649.20.610.000, 649.20.620.000, 649.20.630.000 matching for wall box 649.40.360.000

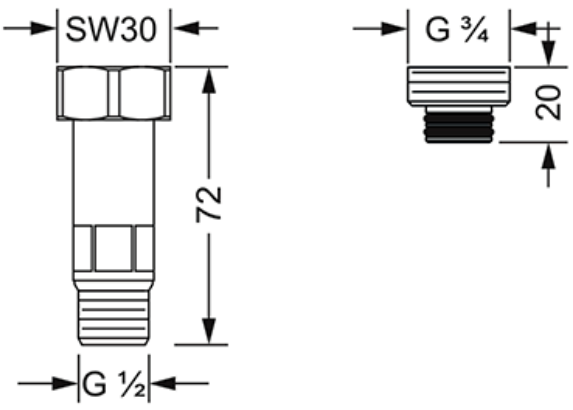

Specification Sheet

BELLEDOR
649.40.360.000
Concealed wall box ½“

· for wetwall and drywall construction
· for installing concealed wall thermostats ½“

To order a complete unit, please order the concealed wall box with an assembly set

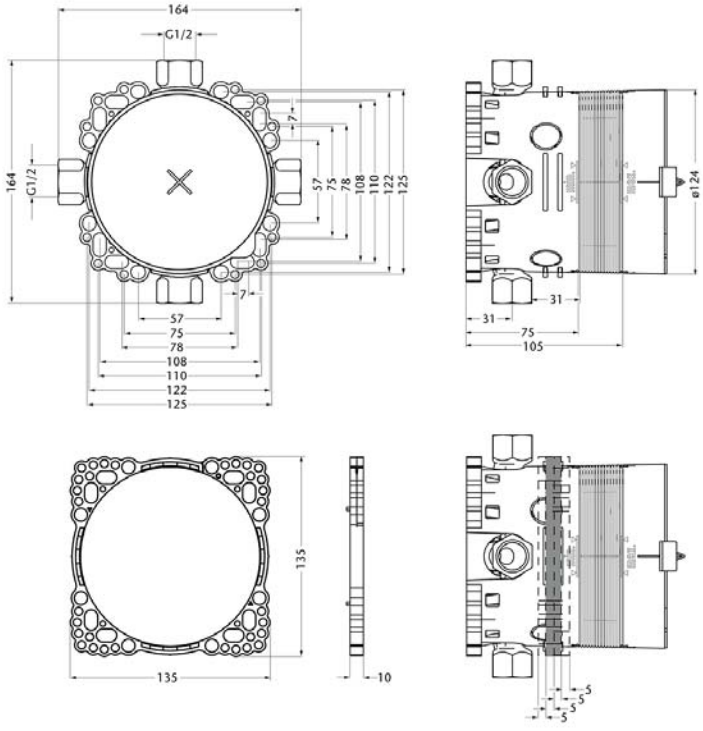

Specification Sheet

BELLEDOR
631.40.555.xxx-AA
Concealed wall thermostat without flow control, assembly set ¾“

- porcelain handle
- without diverter
- design handle for temperature control
- locking device at 38 °C
- flow rate 64,2 l/min at 3 bar

Required:

- **649.40.555.000 |** Concealed thermostat body ¾“

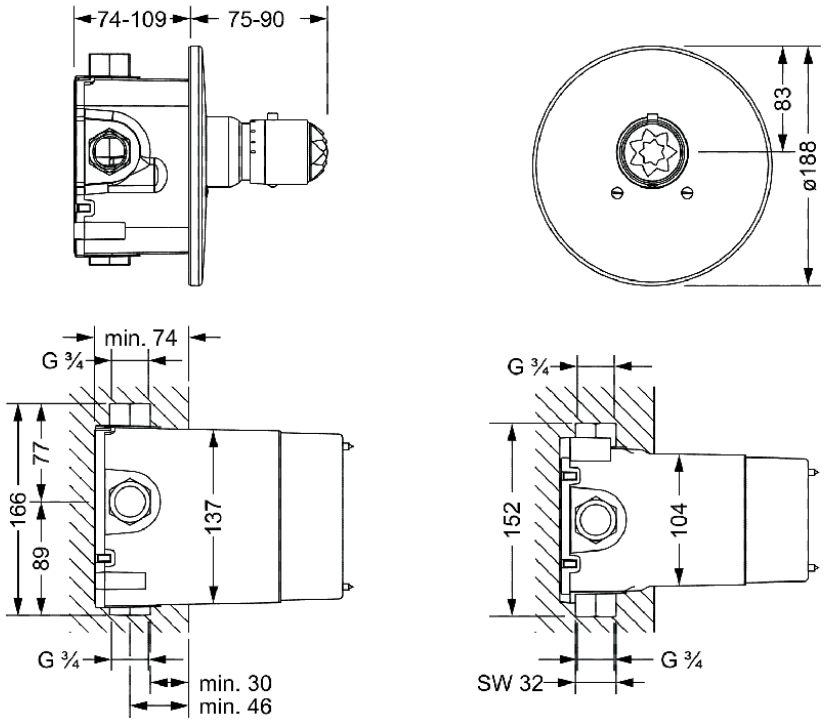

Specification Sheet

BELLEDOR
649.20.634.000
Connection adapter ¾“

· connection adapter, end plug
· for connection 649.20.610.000, 649.20.620.000, 649.20.630.000 with thermostat body 649.40.555.000

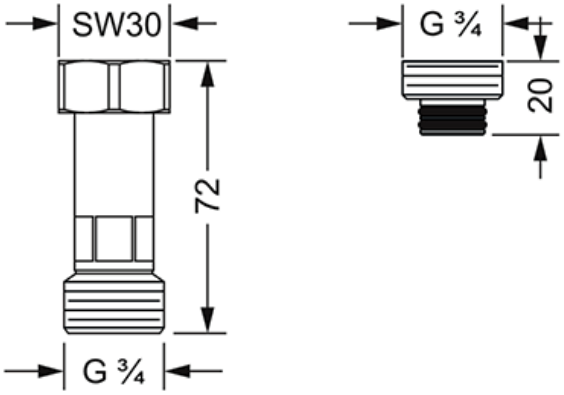

Specification Sheet

BELLEDOR
649.40.555.000
Concealed thermostat body ¾“

- for assembly set XXX.40.555.xxx
- cartridge with filter screens
- for wetwall and drywall construction
- flow rate 64,2 l/min at 3 bar
- without shut-off

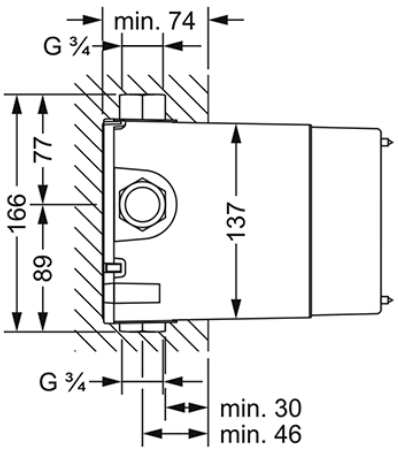

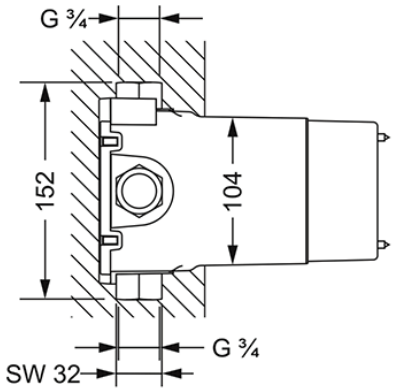

Specification Sheet

BELLEDOR
631.40.520.xxx-AA
Concealed wall thermostat ¾“ without flow control, assembly set

· porcelain handle
· without diverter
· design handle for temperature control
· locking device at 38 °C
· flow rate 41 l/min at 3 bar

Required:
- **649.40.520.000 |** Concealed thermostat body ¾“

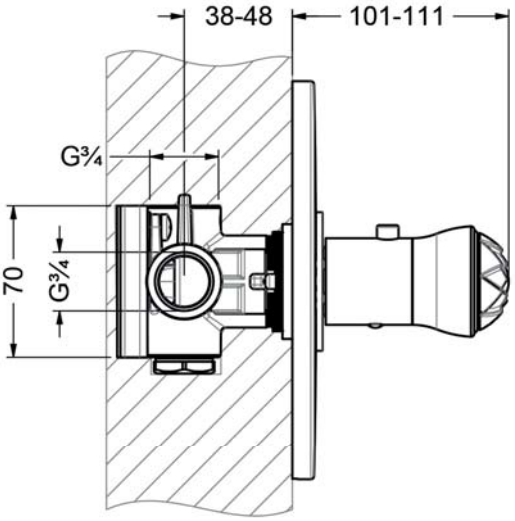

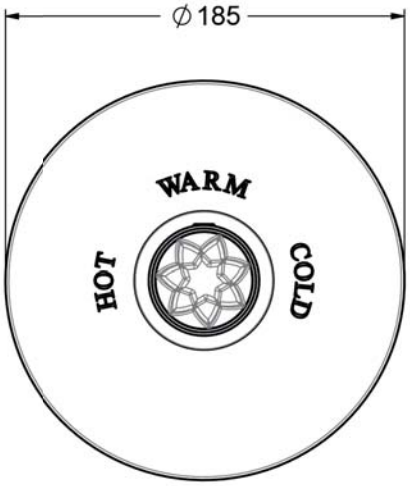

Specification Sheet

BELLEDOR
649.40.520.000
Concealed thermostat body ¾“

- for assembly set XXX.40.520.xxx
- flow rate 41 l/min at 3 bar
- cartridge with filter screens
- for wetwall and drywall construction
- volume control not included
- without shut-off
- fast thermal element shut-down in case of cold water loss, fast response time to reduce hot and cold spikes
- complete with mud guard for installation

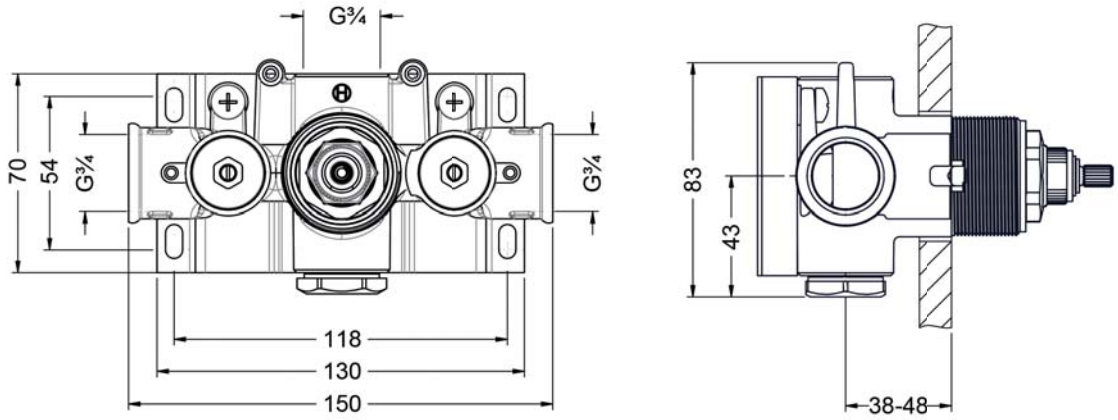

Specification Sheet

BELLEDOR
631.40.650.xxx-AA
Concealed 3-position diverter ½“ assembly set

· porcelain handle
· socket with adjustable escutcheon
· flow rate 52 l/min at 3 bar

Required:

- **649.40.600.000 |** Concealed 3-position diverter ½“, diverter body

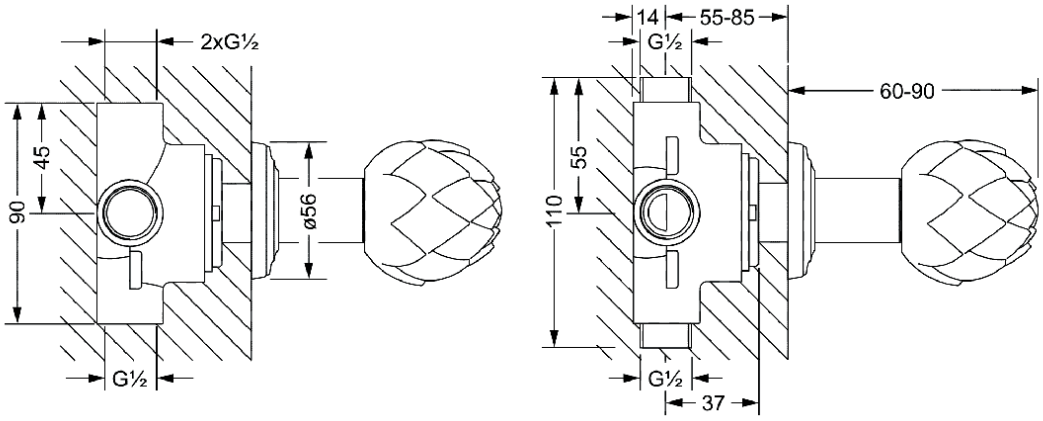

Specification Sheet

BELLEDOR
649.40.600.000
Concealed 3-position diverter ½“ diverter body

- for assembly set XXX.40.650.xxx
- flow rate 52 l/min at 3 bar

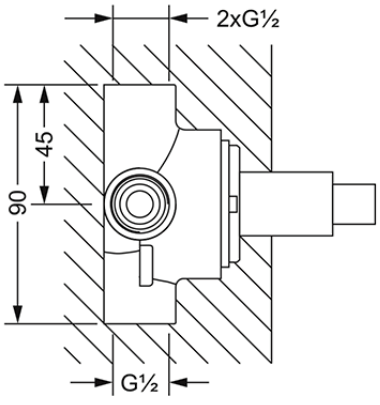

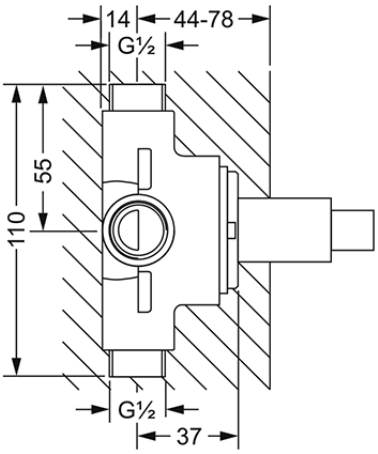

Specification Sheet

BELLEDOR
631.50.234.xxx-AA
Concealed wall valve, assembly set

- porcelain handle
- socket with adjustable
- escutcheon
- flow rate for ½“ 17 l/min at 3 bar
- flow rate for ¾“ 21 l/min at 3 bar

Required:

- **649.20.350.000 |** Concealed wall valve ½“, body, clockwise closure
- **649.20.355.000 |** Concealed wall valve ½“, body, counter-clockwise closure
- **649.20.450.000 |** Concealed wall valve ¾“, body, clockwise closure
- **649.20.455.000 |** Concealed wall valve ¾“, body, counter-clockwise closure

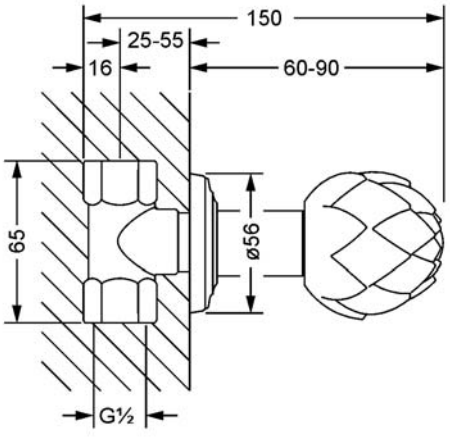

mit Einbaukörper / with concealed body ½”

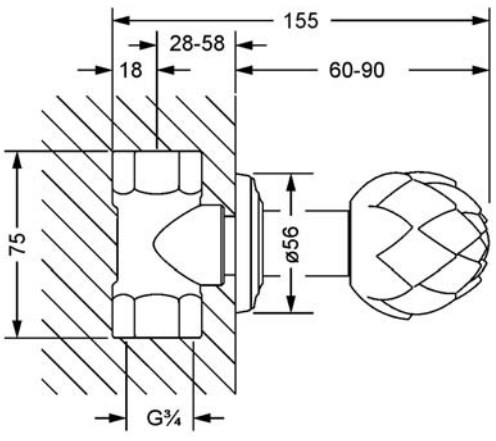

mit Einbaukörper / with concealed body ¾”

Specification Sheet

BELLEDOR
649.20.350.000
Concealed wall valve ½“, body

- clockwise closure
- ceramic discs ½“
- flow rate 17 l/min at 3 bar

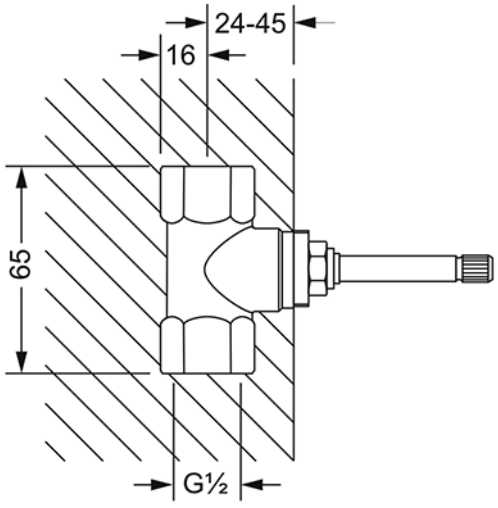

Einbaukörper ½”

Specification Sheet

BELLEDOR
649.20.355.000
Concealed wall valve ½“, body

- counter-clockwise closure
- ceramic discs ½“
- flow rate 17 l/min at 3 bar

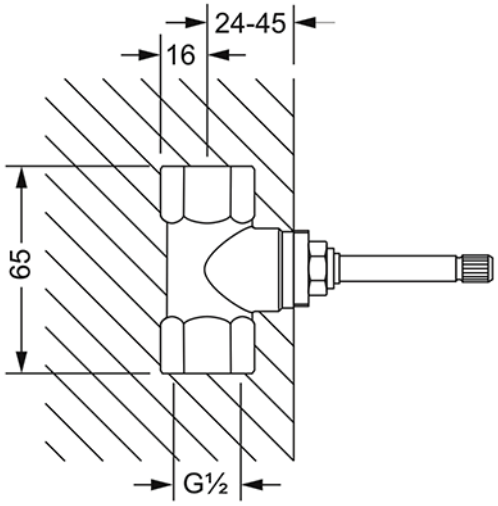

Einbaukörper ½”

Specification Sheet

BELLEDOR
649.20.450.000
Concealed wall valve ¾“, body

- clockwise closure
- ceramic discs ¾“
- flow rate 21 l/min at 3 bar

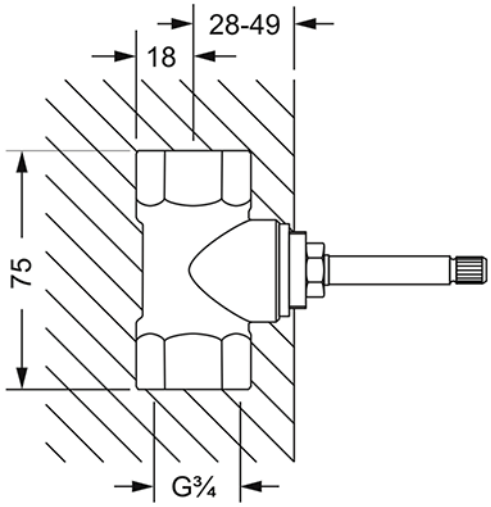

Einbaukörper ¾”

Specification Sheet

BELLEDOR
649.20.455.000
Concealed wall valve ¾“, body

- counter-clockwise closure
- ceramic discs ¾“
- flow rate 21 l/min at 3 bar

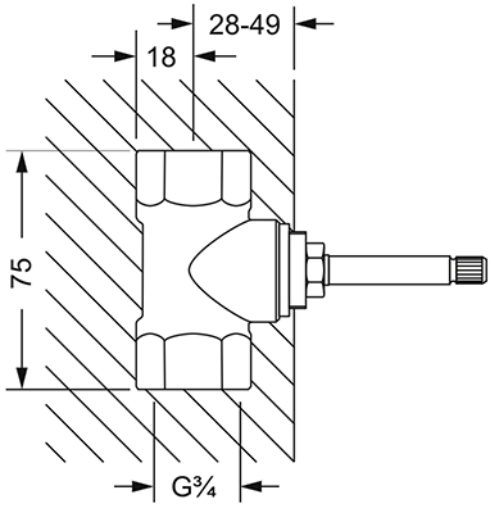

Einbaukörper ¾”

Specification Sheet

BELLEDOR
631.60.432.xxx-AA
Concealed wall-valve-modul assembly set

· porcelain handle
· escutcheon
· spindle valve ¾", clockwise closure with ceramic discs
· flow rate look at installation body

Required:

- **649.20.610.000 |** Concealed wall-valve-modul, single
- **649.20.620.000 |** Concealed wall-valve-modul, double
- **649.20.630.000 |** Concealed wall-valve-modul, triple

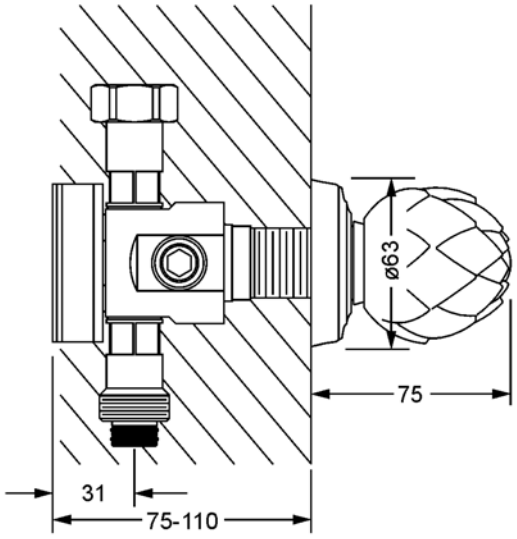

Specification Sheet

BELLEDOR
649.20.610.000
Concealed wall-valve-modul, single

- 2 outlets ½", each 1x right/left possible, simultaneously usable
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with ½" thermostat average 27,6 l/min at 3 bar
- Flow rate with ¾" thermostat average 39,2 l/min at 3 bar

For the connection to the concealed part of the thermostat is required:

- **649.20.612.000 |** Adapter ½" or
- **649.20.634.000 |** Adapter ¾"

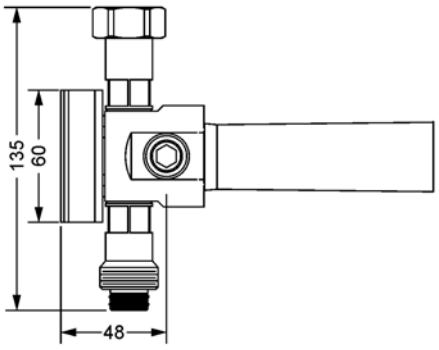

Specification Sheet

BELLEDOR
649.20.620.000
Concealed wall-valve-modul, double

- 4 outlets ½", each 2x right/left possible, simultaneously usable
- precise assembly due to composite
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with ½" thermostat average 32,6 l/min at 3 bar
- Flow rate with ¾" thermostat average 52,7 l/min at 3 bar

For the connection to the concealed part of the thermostat is required:

- **649.20.612.000 |** Adapter ½" or
- **649.20.634.000 |** Adapter ¾"

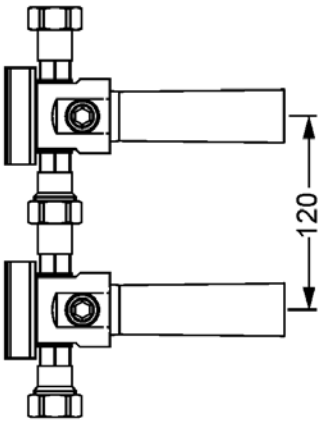

Specification Sheet

BELLEDOR
649.20.630.000
Concealed wall-valve-modul, triple

- 6 outlets ½", each 3x right/left possible, simultaneously usable
- precise assembly due to composite
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with ½" thermostat average 33 l/min at 3 bar
- Flow rate with ¾" thermostat average 55,5 l/min at 3 bar

For the connection to the concealed part of the thermostat is required:

- **649.20.612.000 |** Adapter ½" or
- **649.20.634.000 |** Adapter ¾"

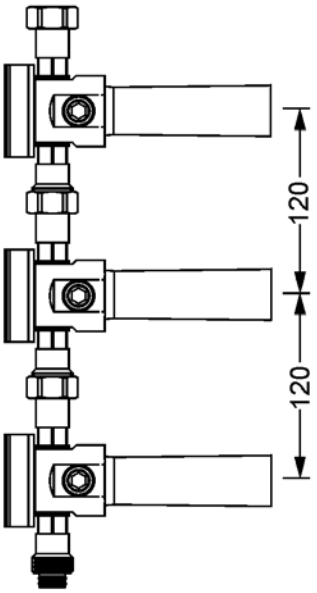

Specification Sheet

BELLEDOR
631.13.310.xxx
Shower bar set, complete

- wall mounting
- wall bar 795 mm, with slider
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 18 l/min at 3 bar
- metal shower hose 1750 mm, both sides with turning cone

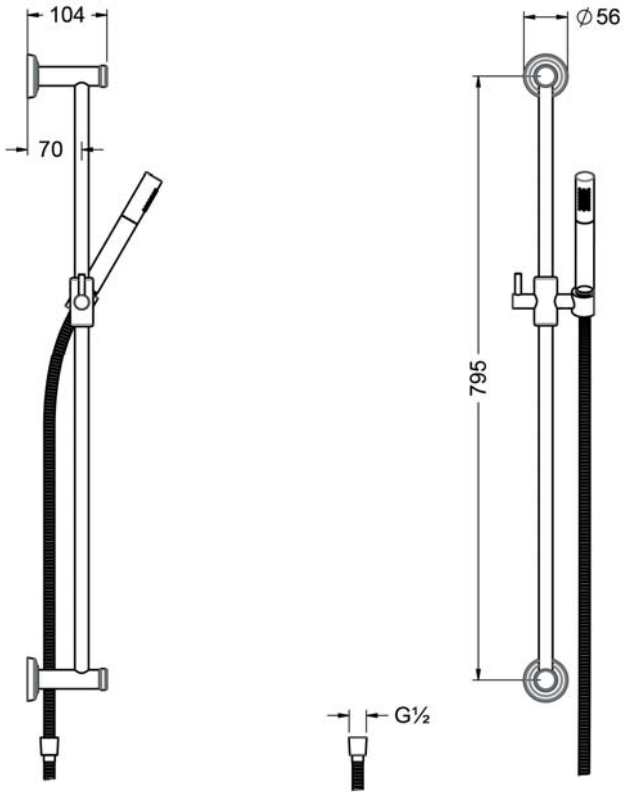

Specification Sheet

BELLEDOR
631.13.315.xxx
Shower bar set, complete

- wall mounting
- wall bar 795 mm, with slider
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1750 mm, both sides with turning cone

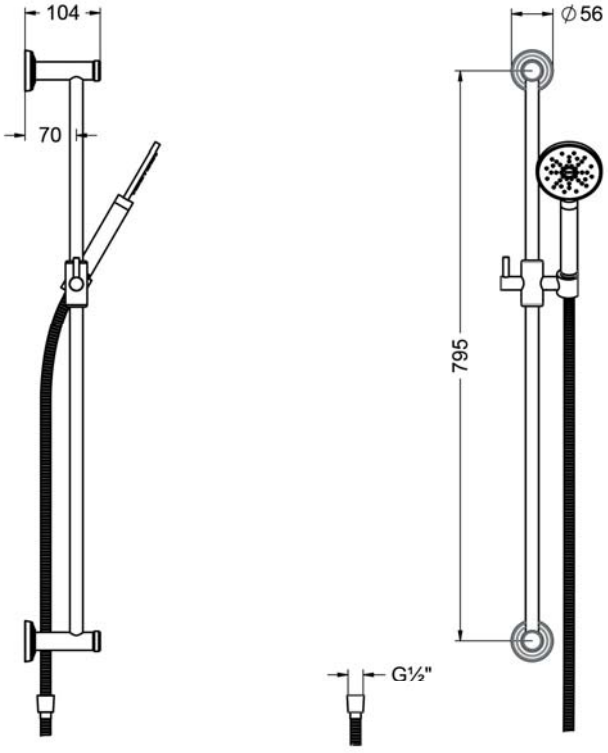

Specification Sheet

BELLEDOR
631.13.210.xxx
Shower combination ½“

- wall fitting and elbow connection ½“
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 18 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone

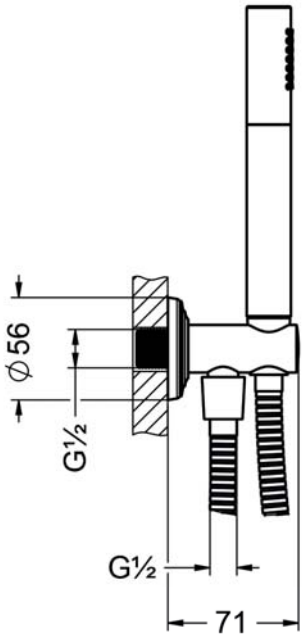

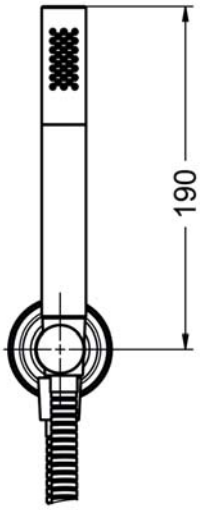

Specification Sheet

BELLEDOR
631.13.215.xxx
Shower combination ½“

- wall fitting and elbow connection ½“
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone

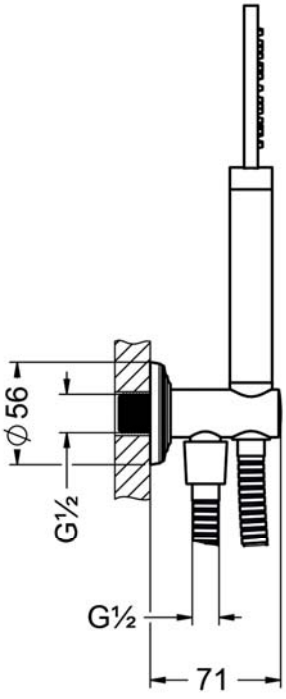

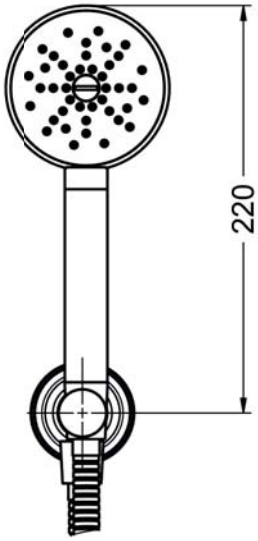

Specification Sheet

BELLEDOR
631.13.150.xxx
Wall elbow connection without cradle ½“

- wall mounting
- discharge ½“
- with backflow preventer
- escutcheon

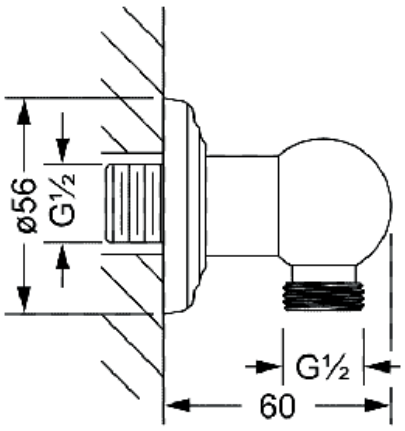

Specification Sheet

BELLEDOR
649.13.260.xxx
Wall fitting for hand shower

- wall mounting
- escutcheon ø 57 mm

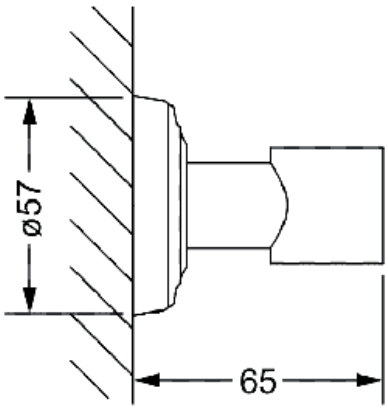

Specification Sheet

BELLEDOR
631.13.237.xxx
Ablution spray combination ½“

- wall fitting and elbow connection ½“
- spray hand shower 649.13.338.xxx, completly metal
- one jet, push-lever operation
- flow rate with water limitation 6,9 l/min
- flexible metal shower hose 1250 mm

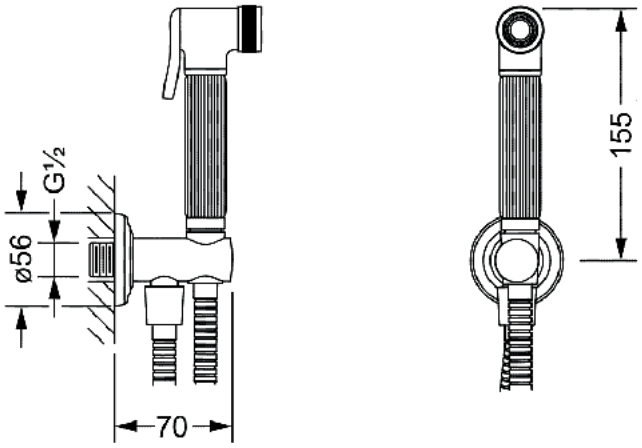

Specification Sheet

BELLEDOR
631.20.237.xxx-AA
Concealed single lever for ablution spray, assembly set ½“

· porcelain handle
· escutcheon
· flow rate 26 l/min at 3 bar

Required:
- **649.20.237.000 |** Single lever mixer ½“, concealed body

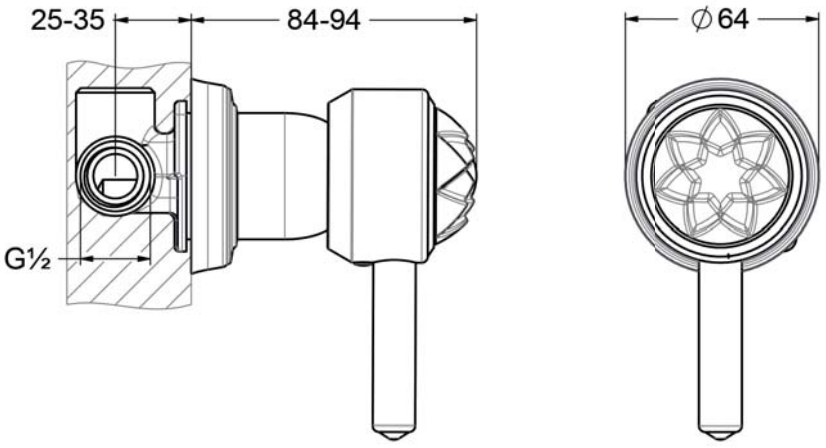

Specification Sheet

BELLEDOR
649.20.237.000
Single lever mixer ½“, concealed body

- cartridge with ceramic discs ½“
- for assembly set XXX.20.237.xxx
- flow rate 26 l/min at 3 bar

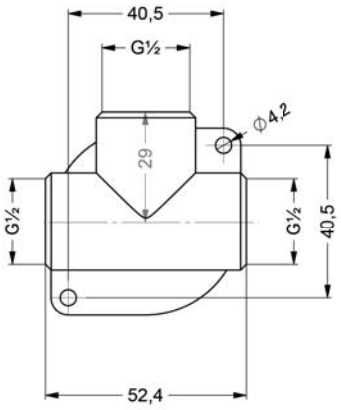

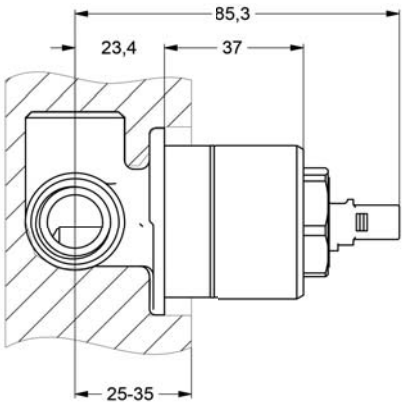

Specification Sheet

BELLEDOR
649.13.930.xxx
Rain shower head ½", 300 mm

- full metal body
- with ball joint
- anticalcareous system
- flow rate 16 l/min at 3 bar
- without wall bracket

- Please order wall or ceiling bracket with the rain shower head separately.

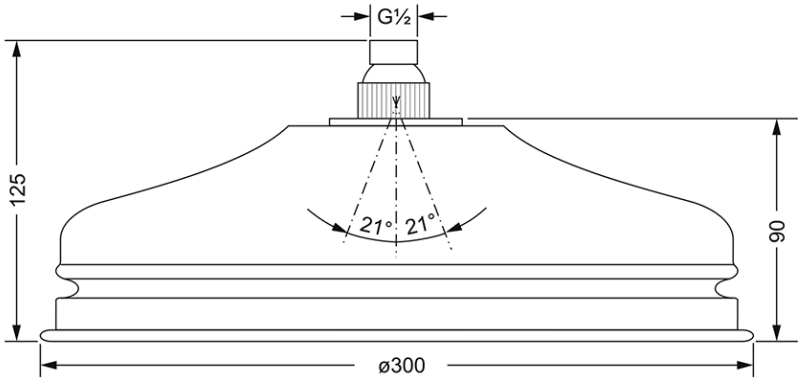

Specification Sheet

BELLEDOR
649.13.755.xxx
Wall bracket ½“

- wall mounting
- spout projection 350 mm

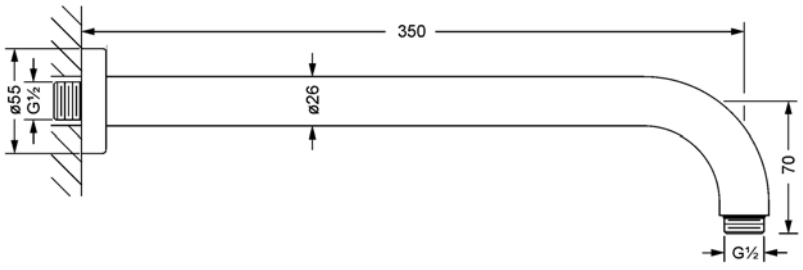

Specification Sheet

BELLEDOR
649.13.519.xxx
Body spray side shower ½“

- wall mounting
- escutcheon ø 130 mm
- material: plastic
- swivel shower head, 20°
- anticalcareous system
- flow rate 3,6 l/min at 3 bar

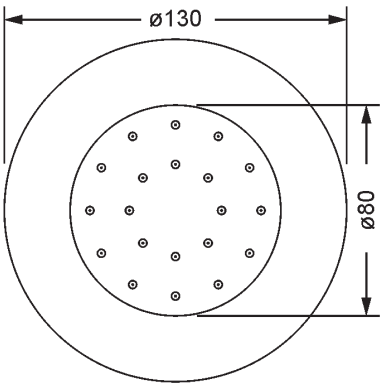

Specification Sheet

BELLEDOR
649.13.395.xxx
Hand shower ½“

- material plastic
- anticalcareous system
- connection ½“
- with 3 jets: normal, hydromassage, soft
- flow rate 10,5 l/min at 3 bar

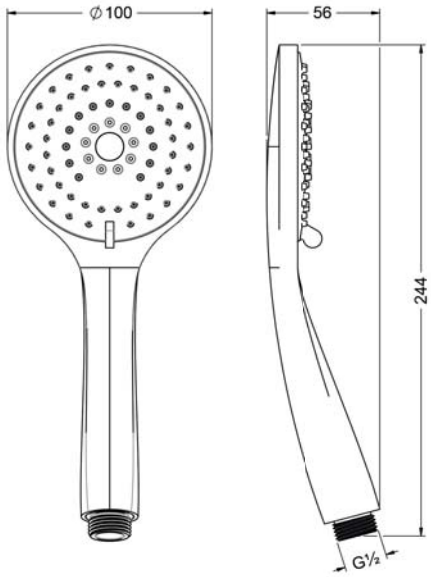

Specification Sheet

BELLEDOR
649.13.391.xxx
Hand shower ½“

- material metal
- anticalcareous system
- connection ½“
- 1-spray hand shower
- flow rate 13,2 l/min at 3 bar

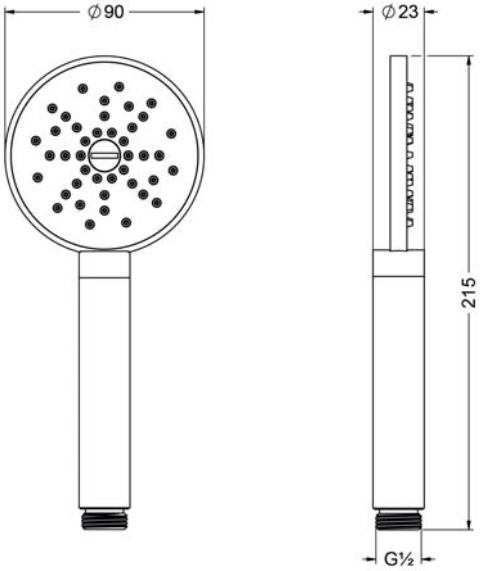

Specification Sheet

BELLEDOR
631.00.002.xxx
Double towel bar

- wall model
- swivelling bars
- double
- approx. 410 mm

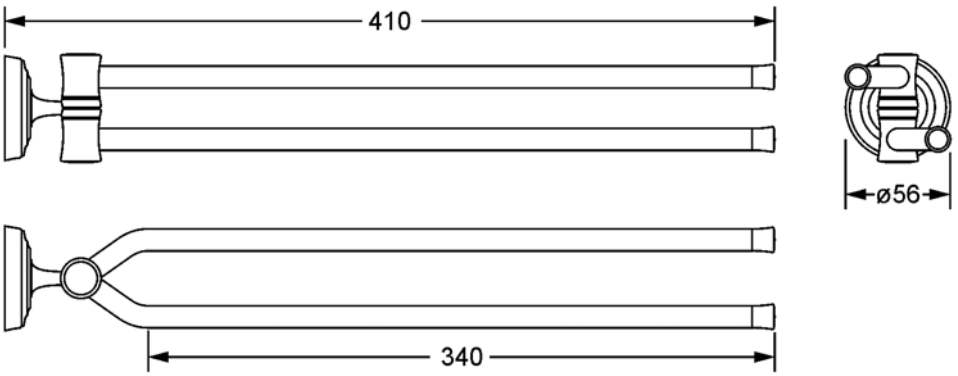

Specification Sheet

BELLEDOR
631.00.047.xxx
Towel ring

- wall model
- ø approx. 190 mm
- closed version

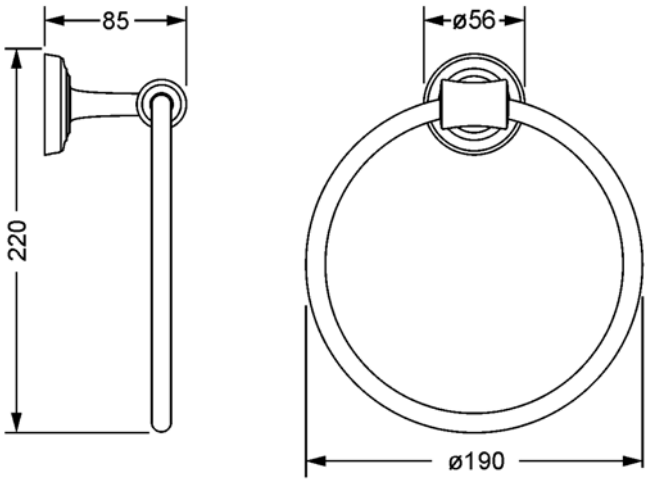

Specification Sheet

BELLEDOR
631.00.022.xxx
Double robe hanger

- wall model
- double

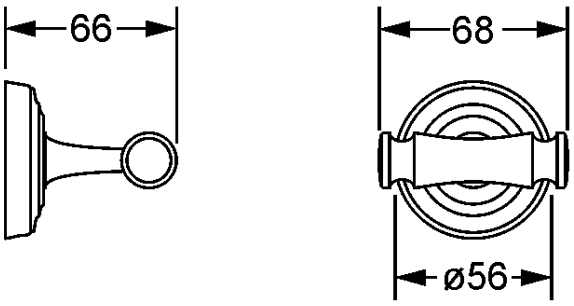

Specification Sheet

BELLEDOR
631.00.040.xxx
Bath towel bar

- wall model
- approx. 800 mm

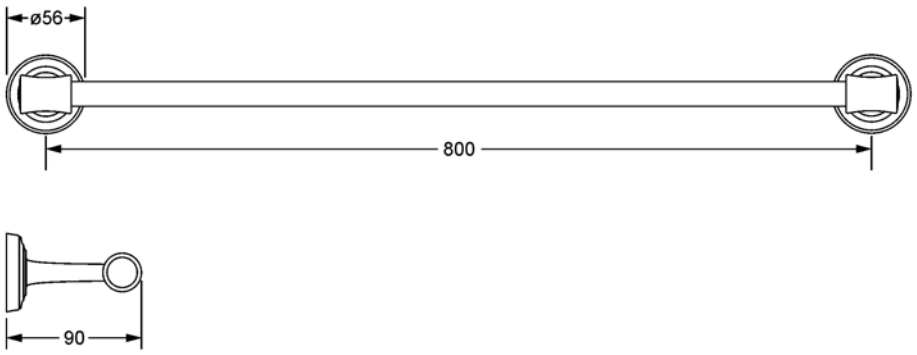

Specification Sheet

BELLEDOR
631.00.048.xxx
Bath towel shelf

- wall model
- approx. 600 x 260 mm

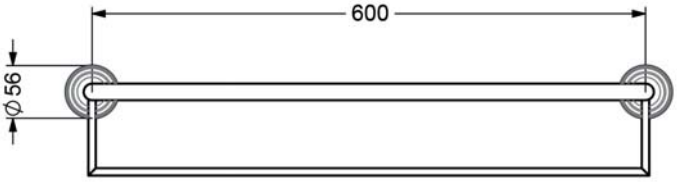



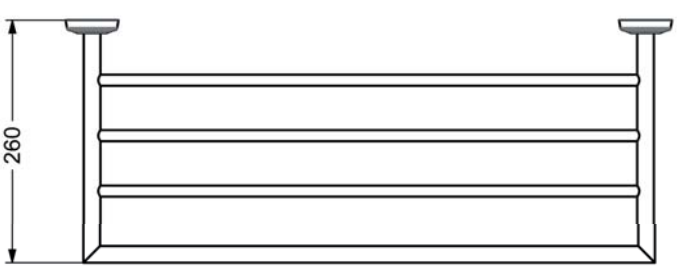

Specification Sheet

BELLEDOR
631.00.031.xxx
Tub handle

- wall model
- approx. 330 mm

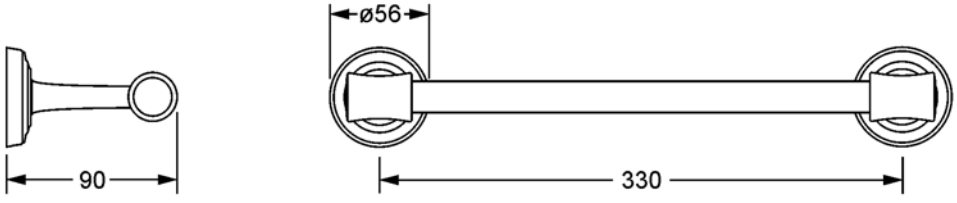

Specification Sheet

BELLEDOR
631.00.030.xxx
Shower door handle

- wall model
- ca. 550 mm



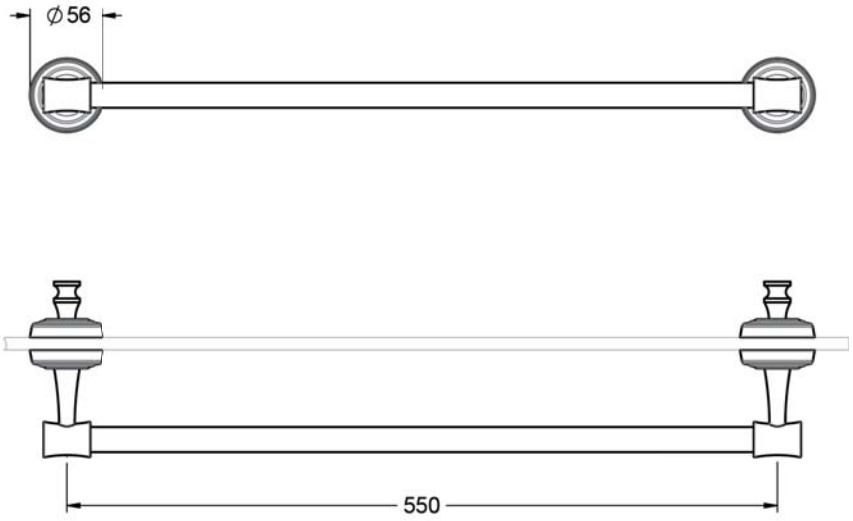

Specification Sheet

BELLEDOR
634.00.104.xxx
Guest towel basket, angular

- wall model
- upper basket for clean towels
- bottom basket for used towels
- basket size 260 x 150 x 190 mm

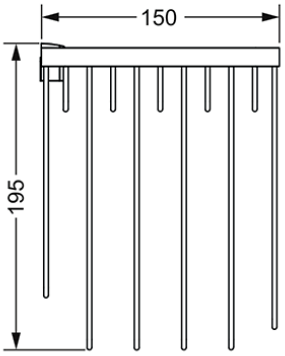

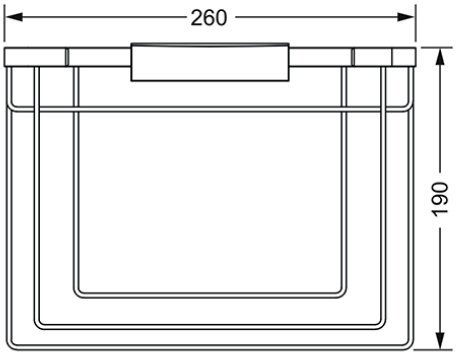

Specification Sheet

BELLEDOR
631.00.007.xxx
Soap dish holder, complete

- wall model
- crystal glass dish, frosted

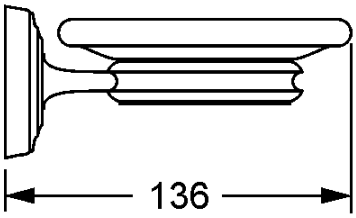



Specification Sheet

BELLEDOR
631.00.017.xxx
Soap dish holder, complete

- free standing model
- crystal glass dish, frosted

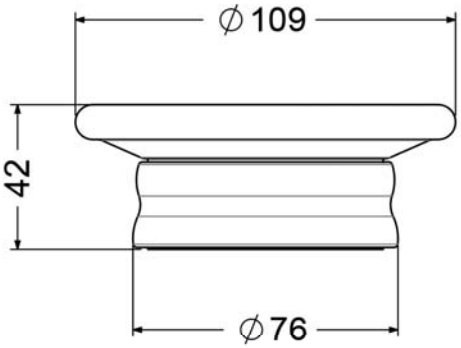

Specification Sheet

BELLEDOR
634.00.105.xxx
Sponge basket

- wall model
- rectangular
- 260 x 130 mm

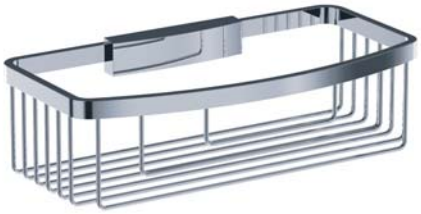



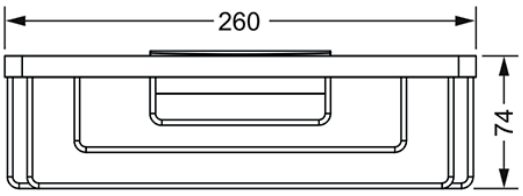

Specification Sheet

BELLEDOR
634.00.106.xxx
Corner sponge basket

- wall model
- triangular
- 195 x 195 mm

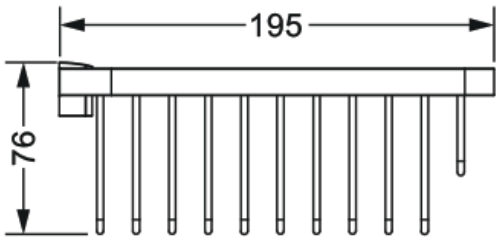

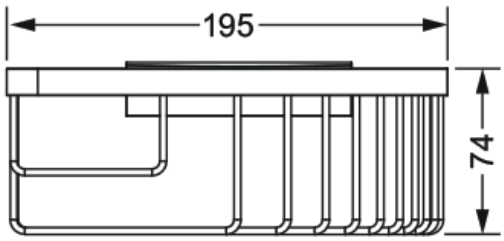

Specification Sheet

BELLEDOR
631.00.006.xxx
Soap dispenser, complete

- wall model
- crystal glass, frosted

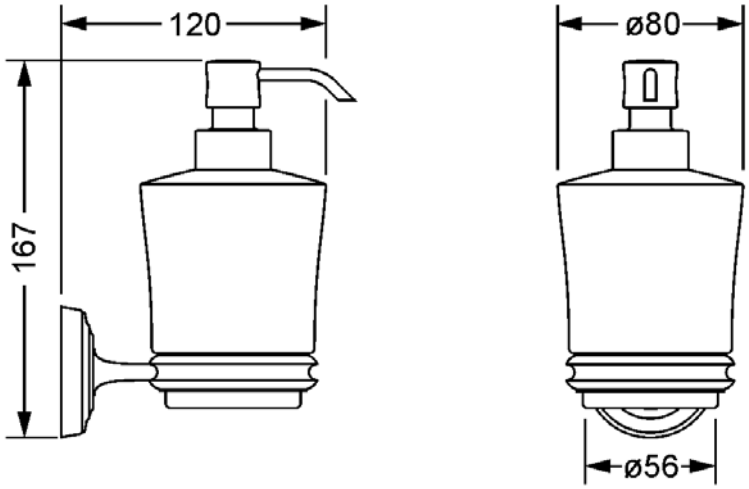

Specification Sheet

BELLEDOR
631.00.016.xxx
Soap dispenser, complete

- free standing model
- crystal glass, frosted

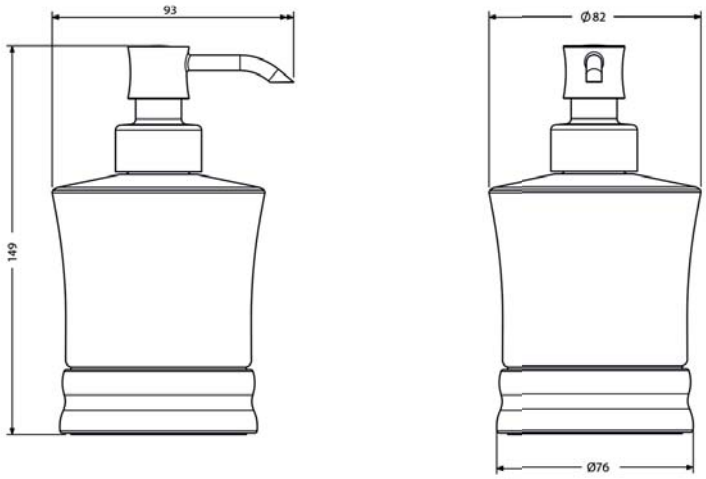

Specification Sheet

BELLEDOR
631.00.036.xxx
Tumbler holder, complete

- wall model
- crystal glass tumbler, frosted

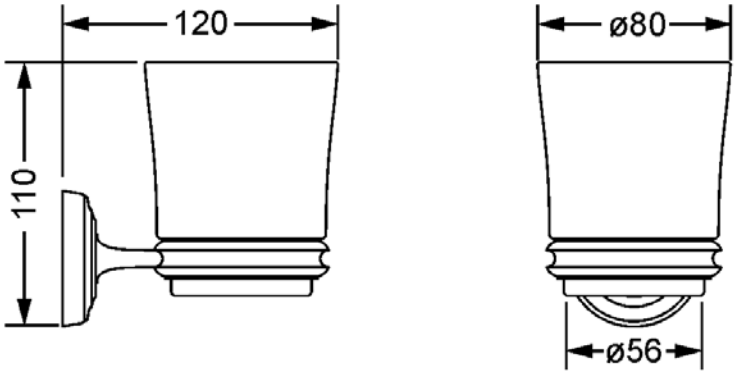

Specification Sheet

BELLEDOR
631.00.046.xxx
Tumbler holder, complete

- free standing model
- crystal glass tumbler, frosted

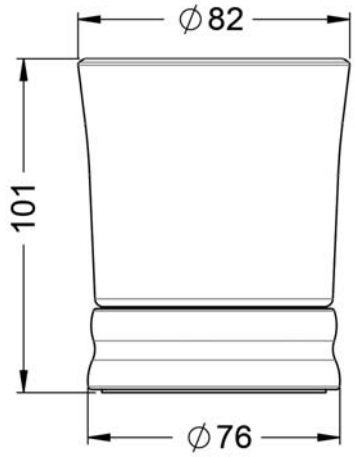

Specification Sheet

BELLEDOR
631.00.014.xxx
Toilet paper roll holder

- wall model
- with lid

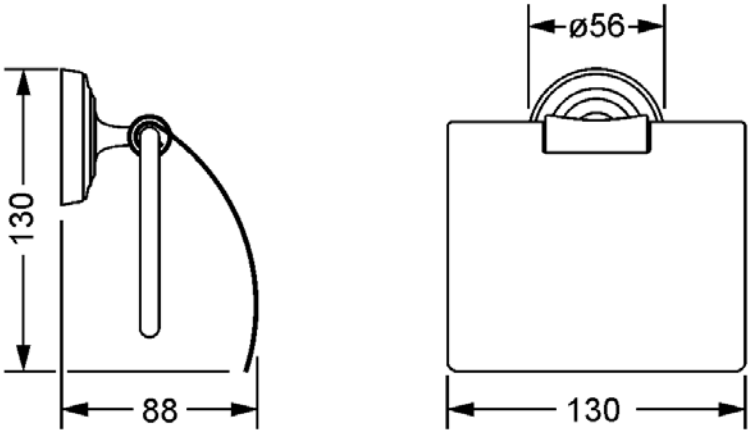

Specification Sheet

BELLEDOR
631.00.024.xxx
Toilet paper roll holder

- wall model
- with shelf
- escutcheon

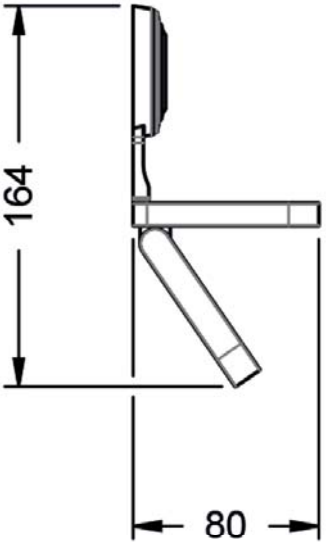

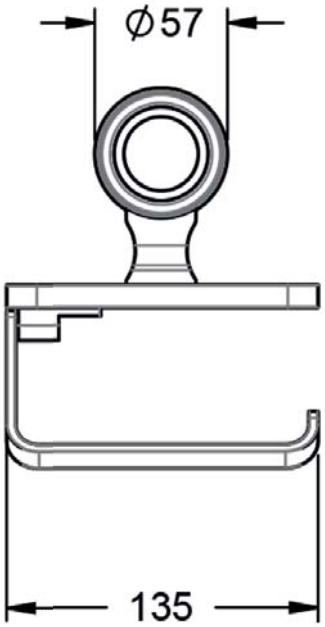

Specification Sheet

BELLEDOR
632.00.024.xxx
Toilet paper roll holder

- wall model
- with shelf





Specification Sheet

BELLEDOR
631.00.015.xxx
Spare toilet paper roll holder

- wall model
- for a spare roll of paper

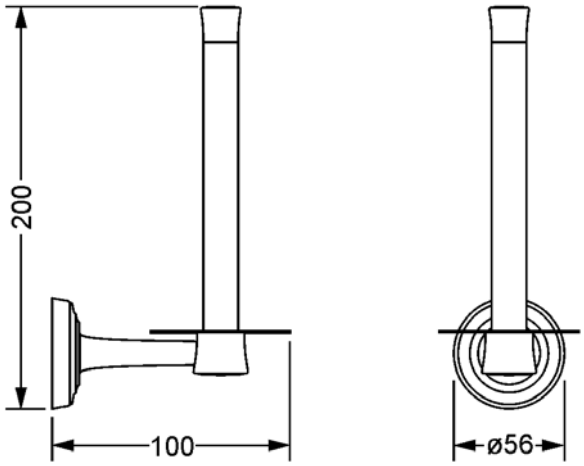

Specification Sheet

BELLEDOR
631.00.000.xxx
Toilet brush holder set, complete

- wall model
- crystal glass, frosted

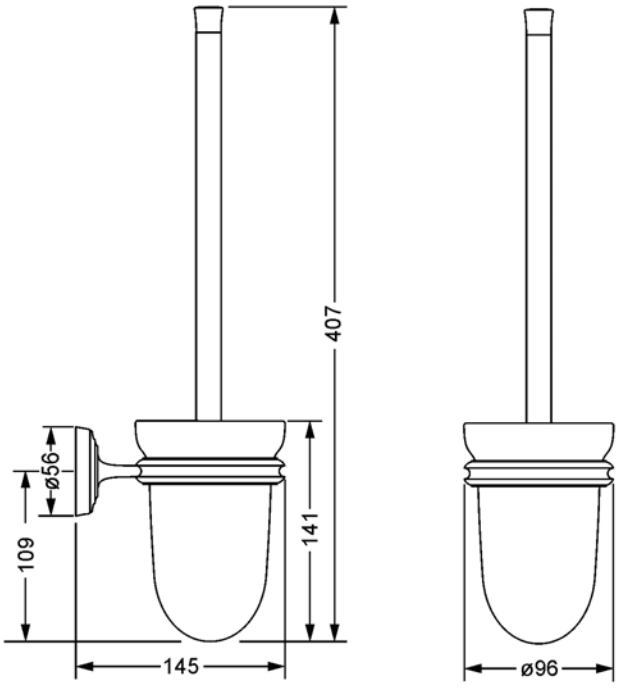

Specification Sheet

BELLEDOR
631.00.001.xxx
Toilet brush holder set, complete

- free standing model
- constructed of solid brass

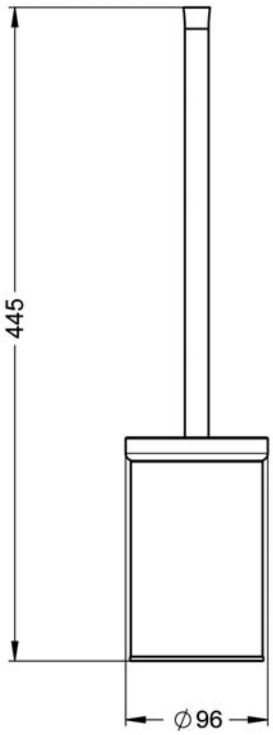

Specification Sheet

BELLEDOR
649.00.414.xxx
Cosmetic mirror, inclusive lighting
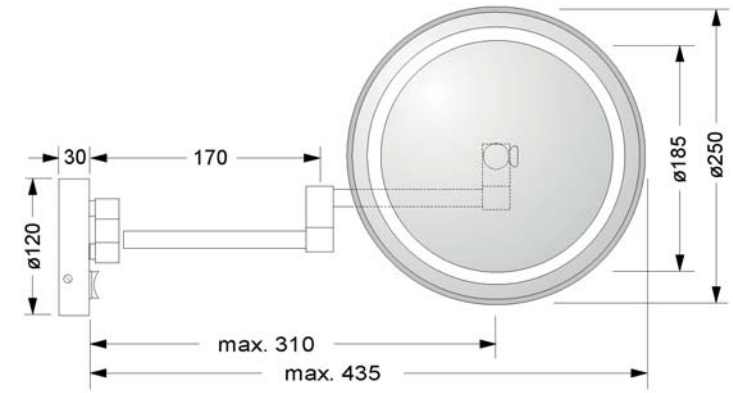
- wall model
- swivelling and extendable
- magnification 3:1
- direct connection
- mirror ø 185 mm
- frame ø 250 mm
- touch control of the background light