

## CRONOS

637.30.305.xxx



Washbasin 3-hole mixer 1/2"



- with lever handles
- spout projection 160 mm
- height 280 mm
- fixed spout
- aerator M22x1
- 2 side valves with ceramic internal upper part 1/2", clockwise and counter-clockwise closure
- push-open waste 1 1/4"
- 2 flexible hoses M10 x 1 x 1/2" x 150 mm

### Recommended:

- 2x 649.15.530.xxx | copper tube 300 mm

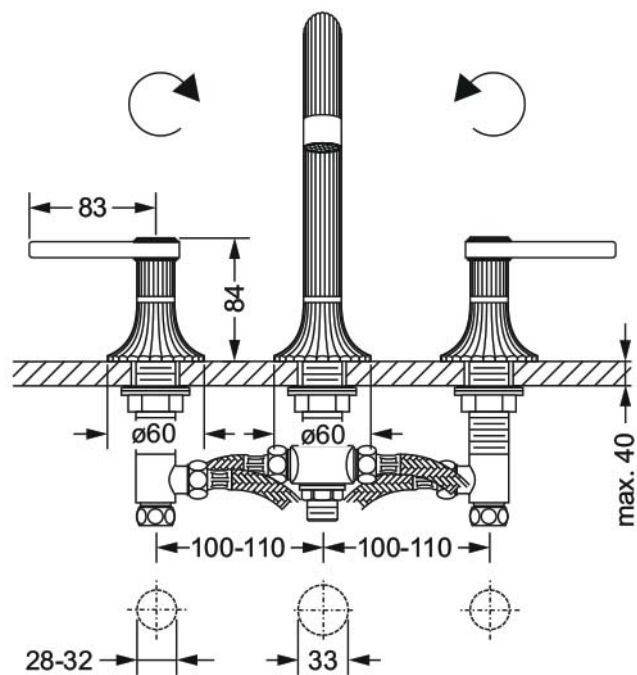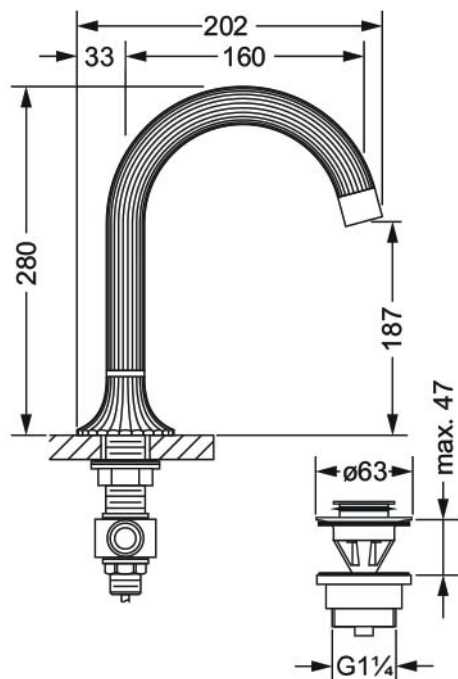

## CRONOS

637.30.300.xxx



Washbasin 3-hole mixer 1/2"



- with cross handles
- spout projection 160 mm
- height 280 mm
- fixed spout
- aerator M22x1
- 2 side valves with ceramic internal upper part 1/2", clockwise and counter-clockwise closure
- push-open waste 1 1/4"
- 2 flexible hoses M10 x 1 x 1/2" x 150 mm

### Recommended:

- 2x 649.15.530.xxx | copper tube 300 mm

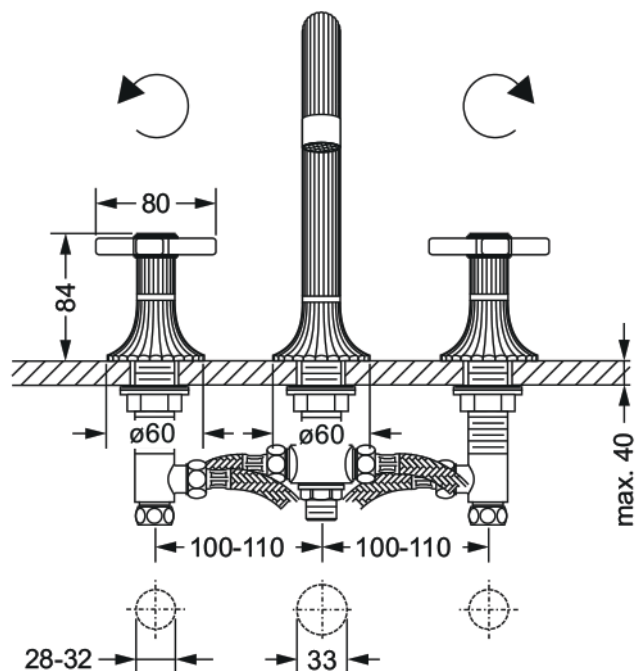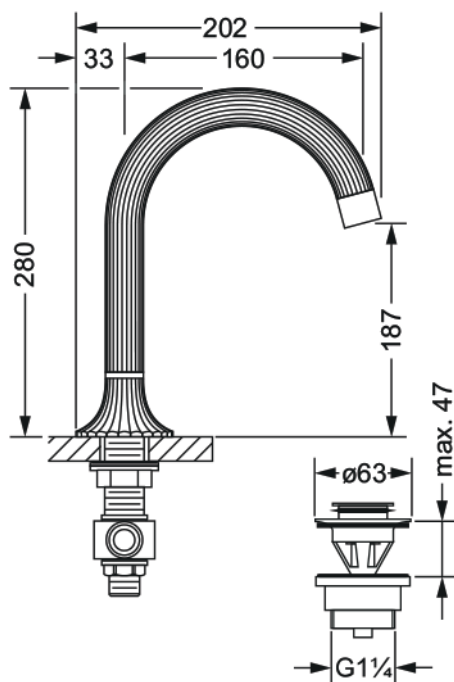

## CRONOS

637.30.365.xxx


Wall washbasin 3-hole mixer, assembly set ½"



- wall mounting
- lever handles
- wall spout
- spout projection 200 - 212 mm
- aerator M22x1
- design handle, socket with adjustable escutcheon
- cartridges with ceramic discs ½"

### Required:

- **649.30.380.000** | Concealed body ½"

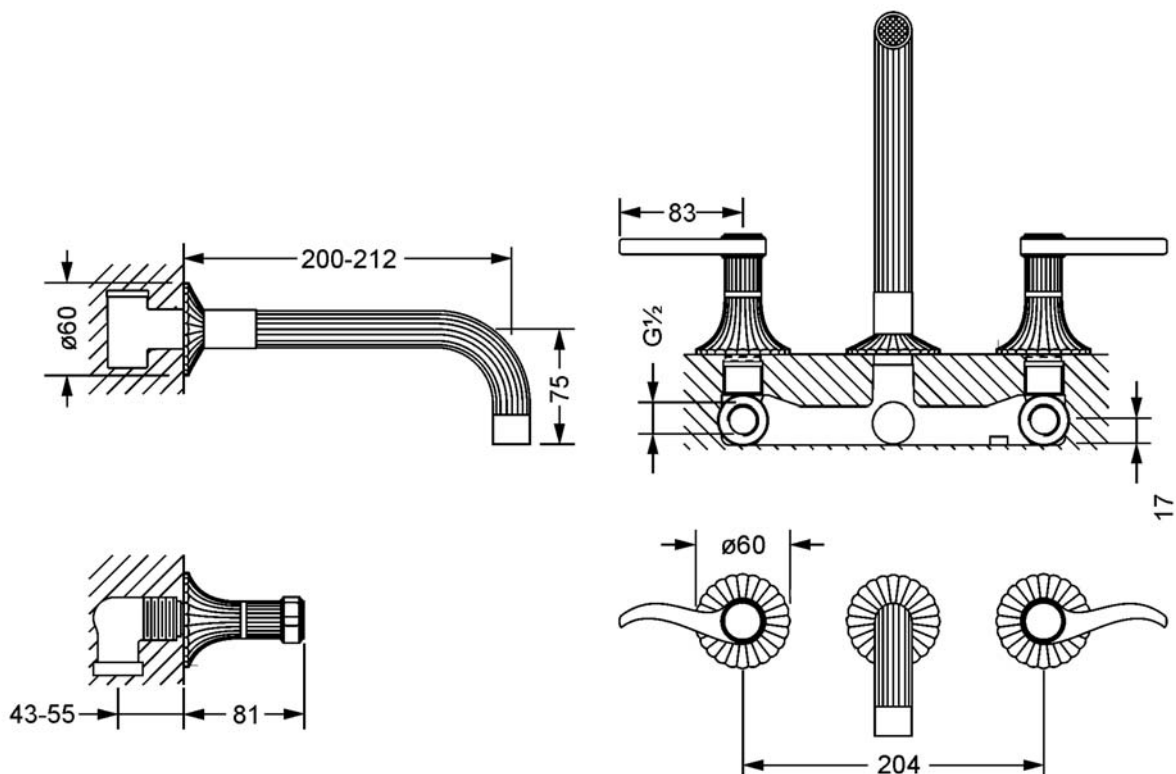

## CRONOS

637.30.360.xxx


Wall washbasin 3-hole mixer, assembly set ½"



- wall mounting
- cross handles
- wall spout
- spout projection 200 - 212 mm
- aerator M22x1
- design handle, socket with adjustable escutcheon
- cartridges with ceramic discs ½"

### Required:

- **649.30.380.000** | Concealed body ½"

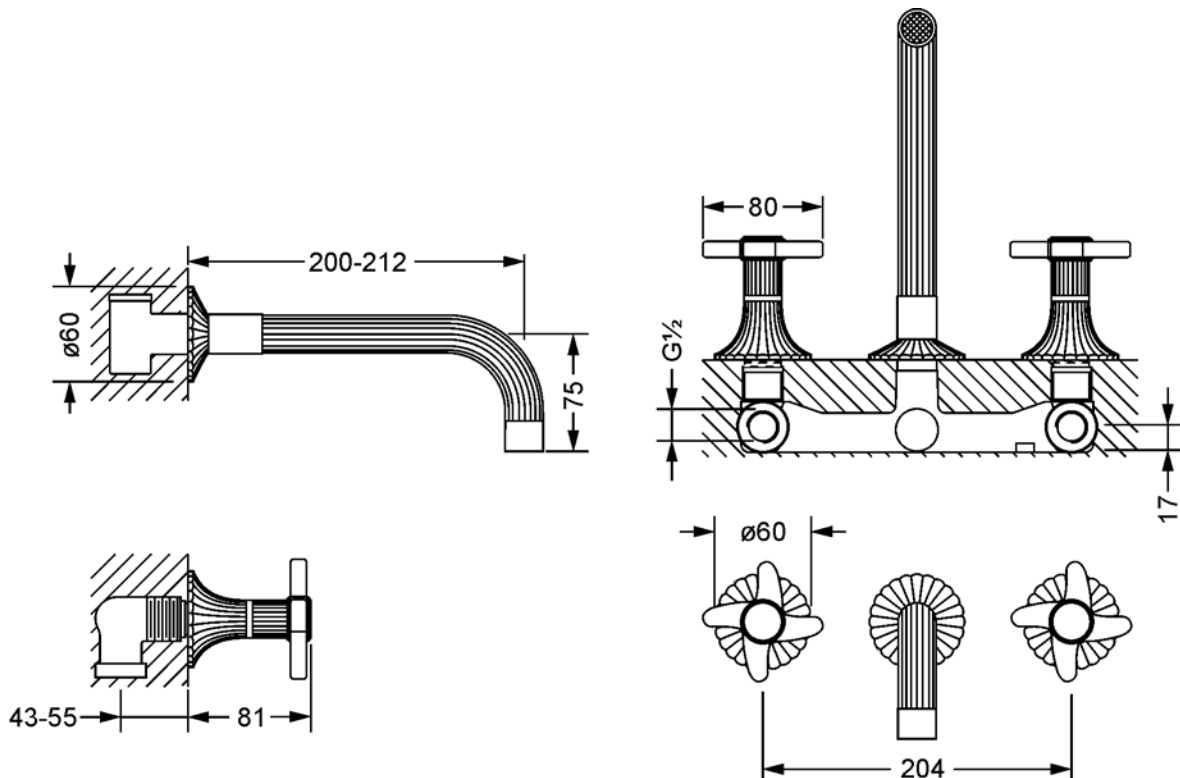




## CRONOS

649.30.380.000

Wall washbasin 3-hole mixer, concealed body 1/2"



- 2 connections 1/2", center distance 204 mm
- for assembly set XXX.30.360.xxx and XXX.30.365.xxx

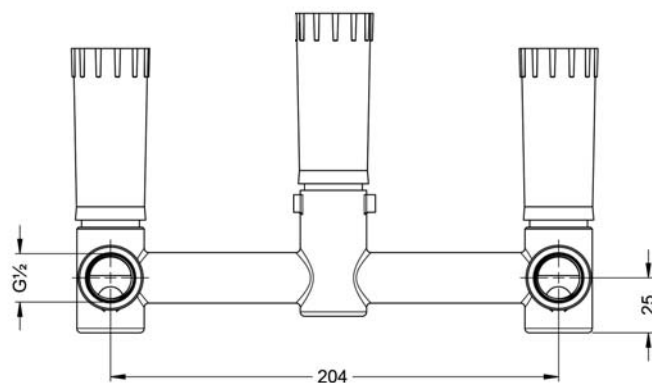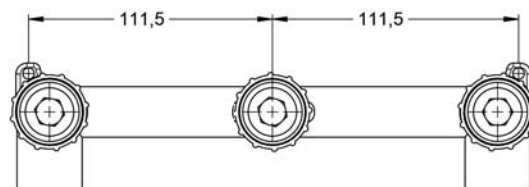



## CRONOS

637.10.105.xxx

Bidet 1-hole mixer 1/2"



- with lever handles
- spout projection 125 mm
- height 160 mm
- fixed spout
- aerator M24x1 with ball joint
- ceramic internal upper part 1/2"
- pop-up waste 1 1/4"
- 2 pressure hoses M10x1 x 450 mm

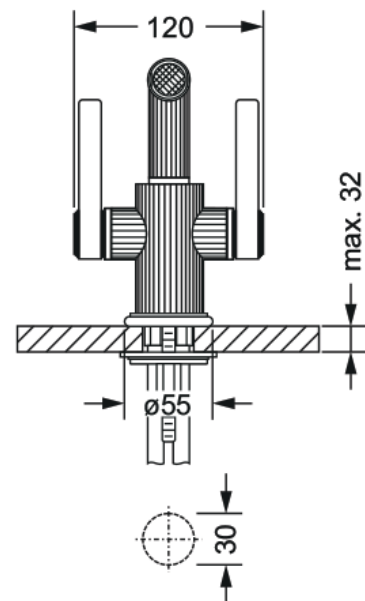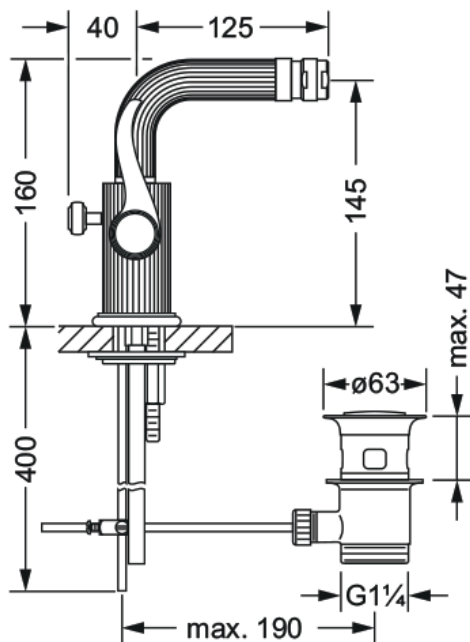



## CRONOS

637.10.100.xxx

BBidet 1-hole mixer 1/2"



- with cross handles
- spout projection 125 mm
- height 160 mm
- fixed spout
- aerator M24x1 with ball joint
- ceramic internal upper part 1/2"
- pop-up waste 1 1/4"
- 2 pressure hoses M10x1 x 450 mm

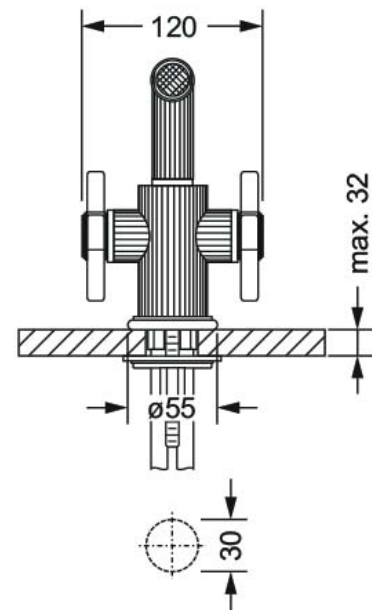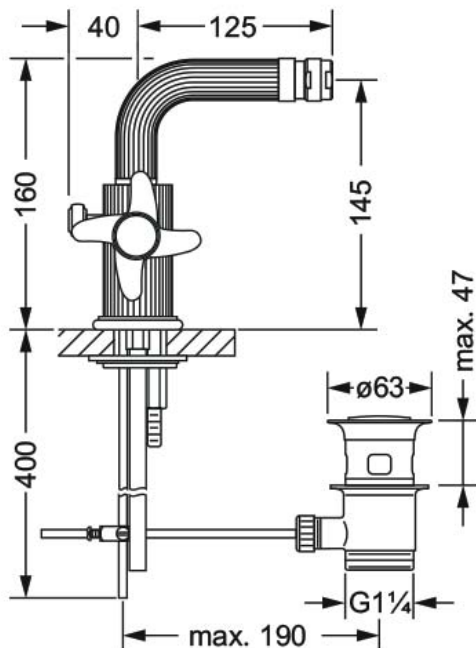


## CRONOS

637.12.105.xxx

Angle valve 1/2"



- wall mounting
- with lever handle
- projection 106 mm
- cartridge 1/2"
- compression joint
- escutcheon

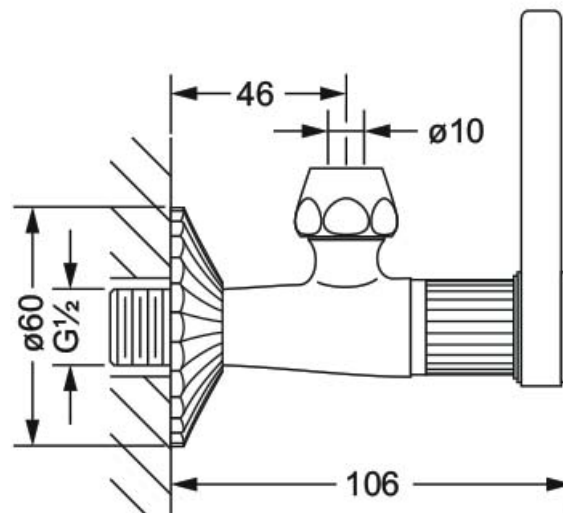


## CRONOS

637.12.100.xxx

Angle valve 1/2"



- wall mounting
- with cross handle
- projection 106 mm
- cartridge 1/2"
- compression joint
- escutcheon

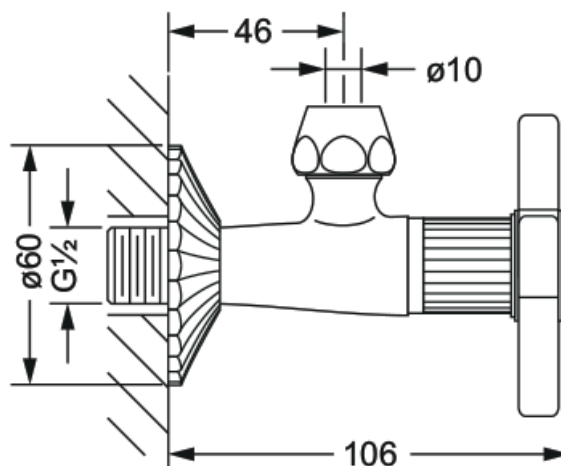


## CRONOS

649.15.530.xxx

Copper tube, 300 mm

---

- with flange
- for compression joint

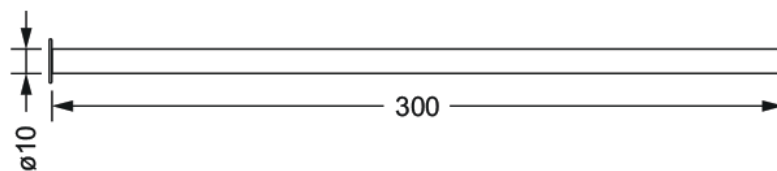


## CRONOS

649.15.550.xxx

Copper tube, 500 mm

---

- with flange
- for compression joint

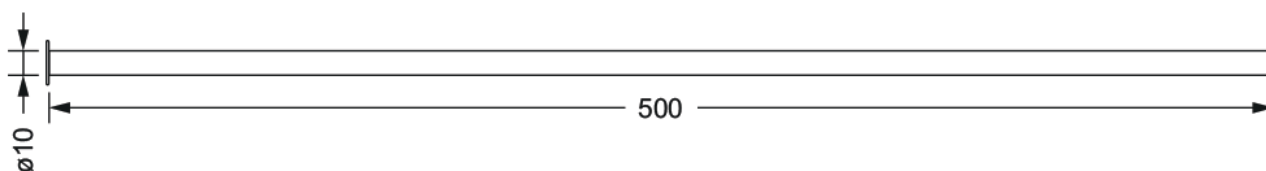


## CRONOS

649.15.340.xxx

Washbasin cupped siphon trap 1 ¼"

- wall mounting
- heavy metal
- escutcheon
- outlet tube ø 32 mm
- siphon depth 165 mm

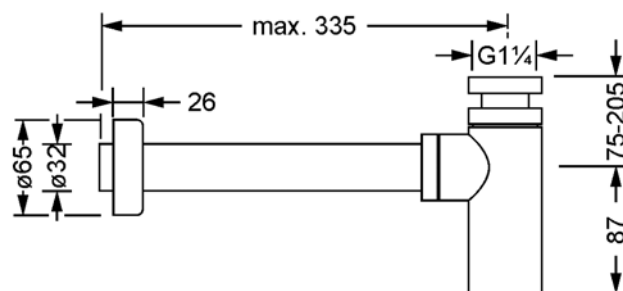


## CRONOS

649.15.330.xxx

Bidet cupped siphon trap 1 1/4"

- wall mounting
- heavy brass
- escutcheon
- outlet tube ø 32 mm

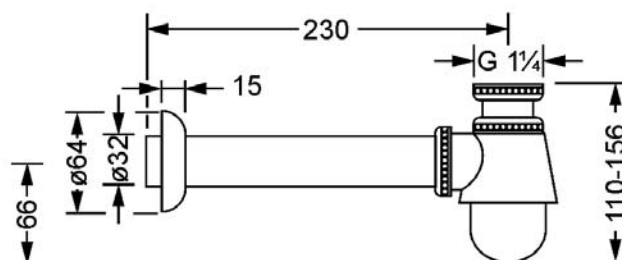

## CRONOS

637.40.107.xxx




Tub/shower mixer set, deck mount 1/2"



- lever handles
- spout projection 172 mm
- height 275 mm
- aerator M28 x 1
- fixed spout
- 2 side valves, ceramic internal upper part 1/2"
- tub/shower diverter
- metal shower hose 2000 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar

### Recommended:

- **649.40.160.000** | Assembly plate, complete

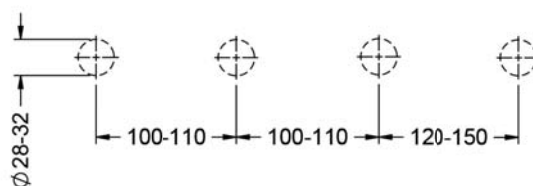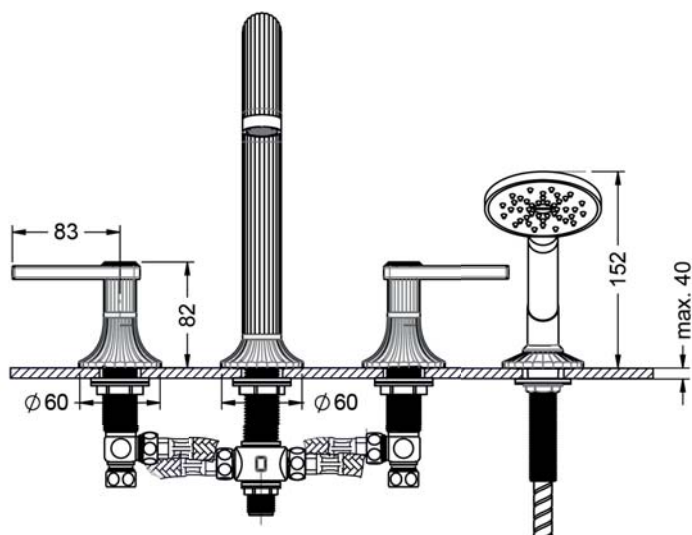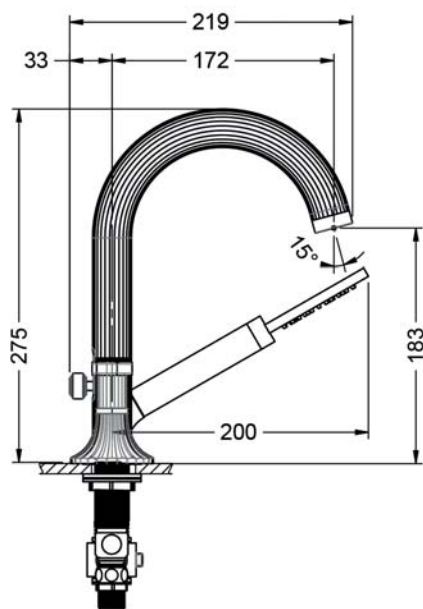

## CRONOS

637.40.102.xxx



Tub/shower mixer set, deck mount 1/2"



- cross handles
- spout projection 172 mm
- height 275 mm
- aerator M28 x 1
- fixed spout
- 2 side valves, ceramic internal upper part 1/2"
- tub/shower diverter
- metal shower hose 2000 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar

### Recommended:

- **649.40.160.000** | Assembly plate, complete

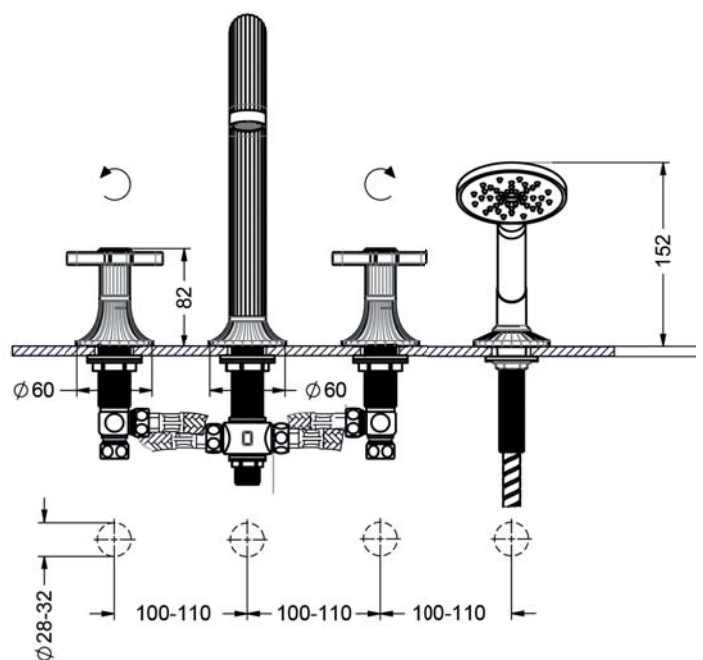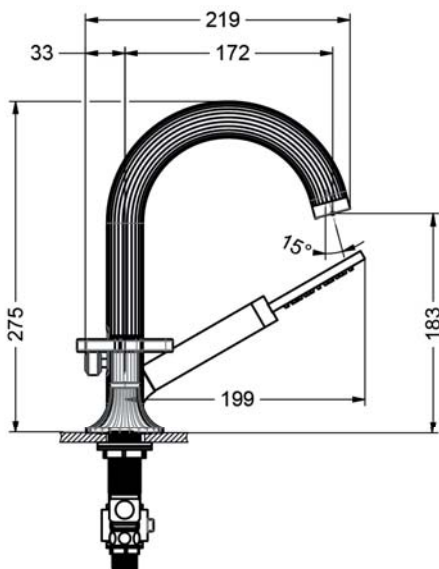

## CRONOS



637.40.152.xxx

Tub/shower combination 1/2"

- cross handles
- for waste and overflow set with bath tub filler spout, without pipe interrupter
- 2 side valves, ceramic internal upper parts 1/2", 2-position diverter
- metal shower hose 2000 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar

### Recommended:

- **649.40.160.000** | Assembly plate, complete

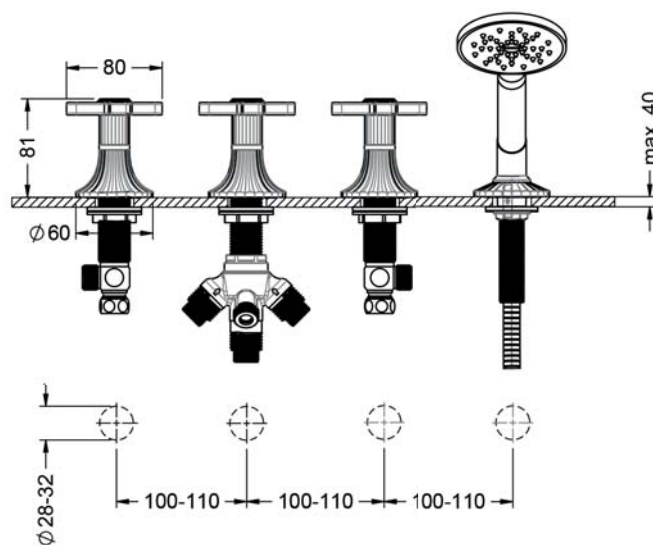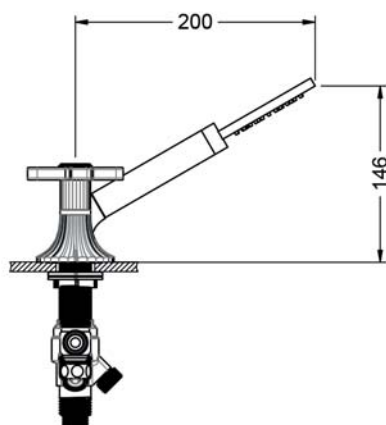

## CRONOS

637.40.157.xxx



Tub/shower combination 1/2"



- lever handles
- for waste and overflow set with bath tub filler spout, without pipe interrupter
- 2 side valves, ceramic internal upper parts 1/2", 2-position diverter
- metal shower hose 2000 mm
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar

### Recommended:

- **649.40.160.000** | Assembly plate, complete

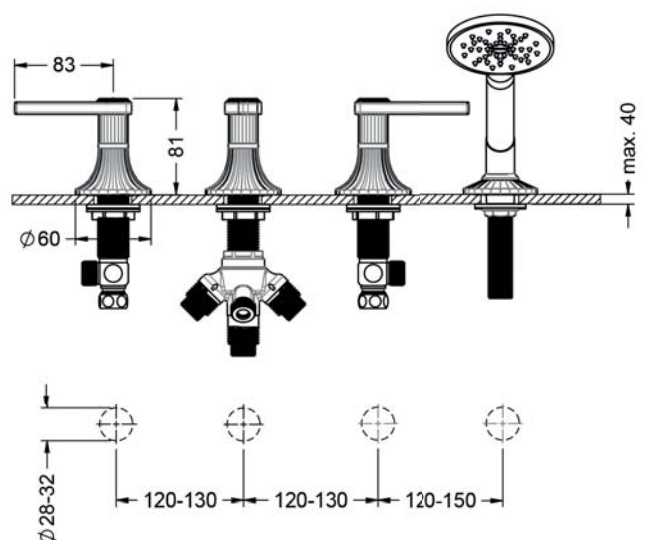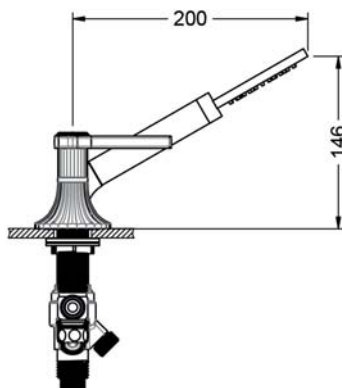


## CRONOS

649.40.160.000

Assembly plate module

- installation under tiles or bath rim
- dimensions 680 x 150 mm
- complete metal plate with mounting elements
- recommended hose box system 649.40.150.000, 649.40.170.000

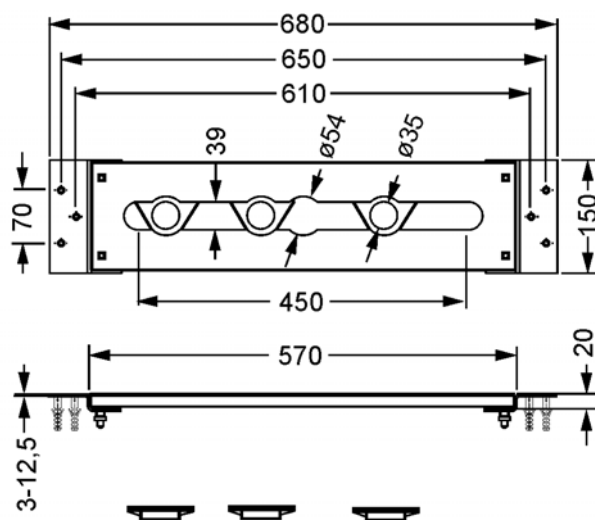


## CRONOS

637.20.107.xxx

Exposed tub/shower mixer, inclusive shower set



- wall mounting
- with lever handles
- spout projection 224 mm
- aerator M22x1
- fixed spout
- tub/shower diverter
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm

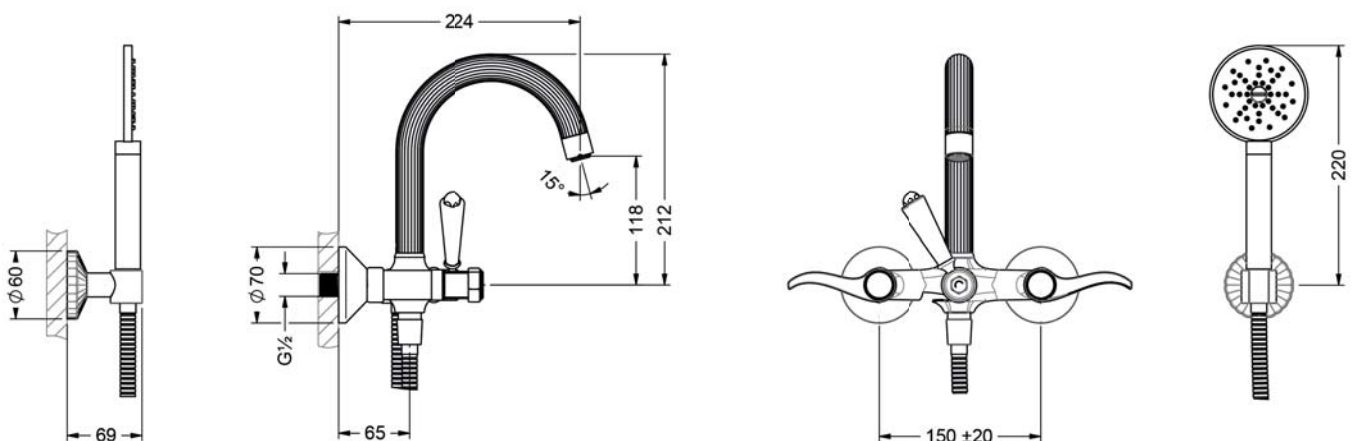


## CRONOS

637.20.102.xxx

Exposed tub/shower mixer, inclusive shower set



- wall mounting
- with cross handles
- spout projection 224 mm
- aerator M22x1
- fixed spout
- tub/shower diverter
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm

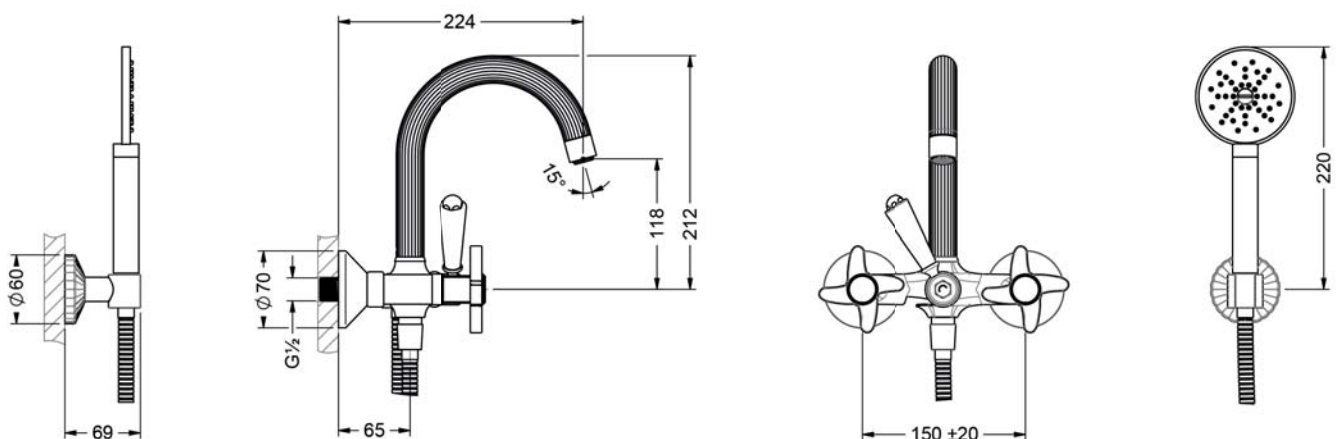

## CRONOS

637.20.147.xxx


Tub/shower mixer for supply pipes, inclusive shower set ½"



- free standing assembly
- with lever handles
- spout projection with pipes 256 mm
- fixed spout
- aerator M22x1
- flow rate of the spout 20 l/min at 3 bar
- tub/shower diverter
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm
- ceramic internal upper part ½"
- total height max. 1025 mm
- aerator height max. 930 mm

**Required:** 600.15.260.xxx | 2x water supply pipes ½"


**Recommended:** 109.10.970.000 | Assembly set for pre-installation

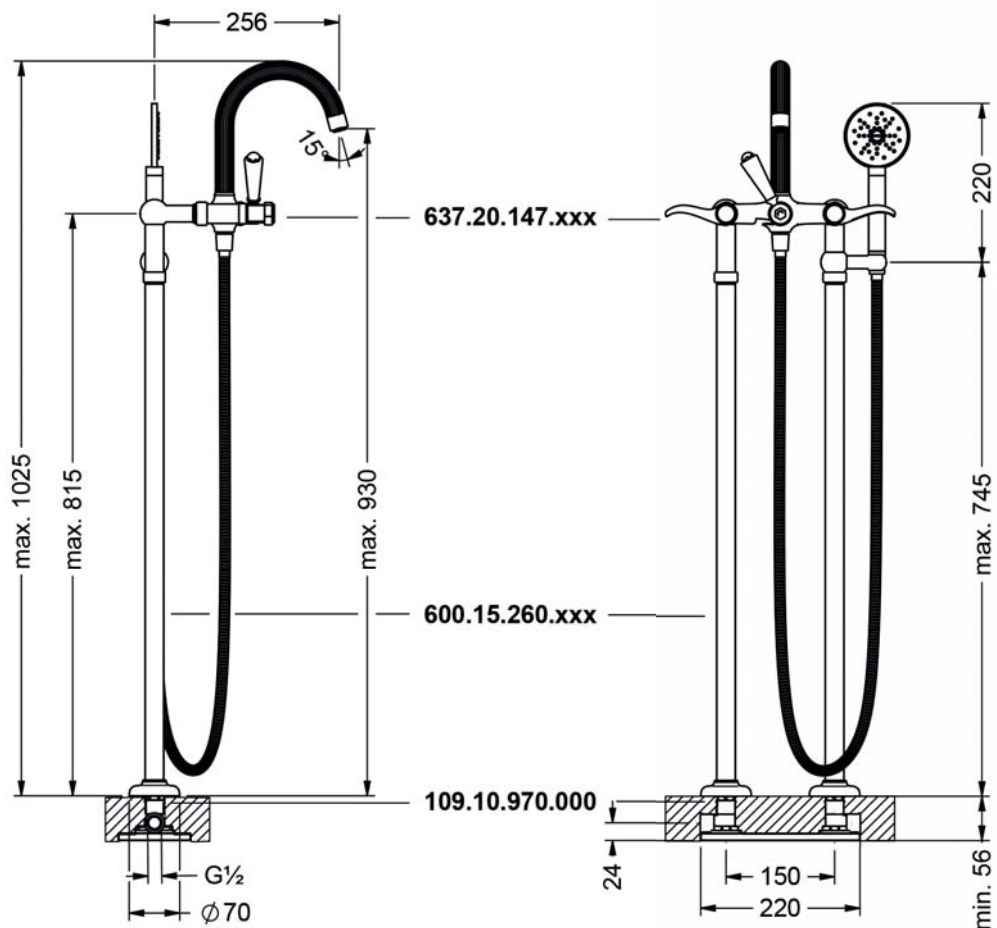

## CRONOS

637.20.142.xxx


Tub/shower mixer for supply pipes 1/2"

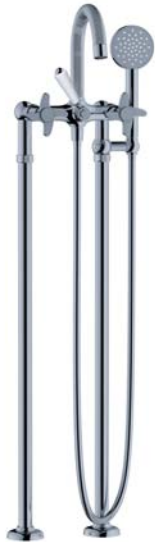

- free standing assembly
- with cross handles
- spout projection with pipes 256 mm
- fixed spout
- aerator M22x1
- flow rate of the spout 20 l/min at 3 bar
- tub/shower diverter
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm
- ceramic internal upper part 1/2"
- total height max. 1025 mm
- aerator height max. 930 mm

**Required:** 600.15.260.xxx | 2x water supply pipes 1/2"

**Recommended:** 109.10.970.000 | Assembly set for pre-installation



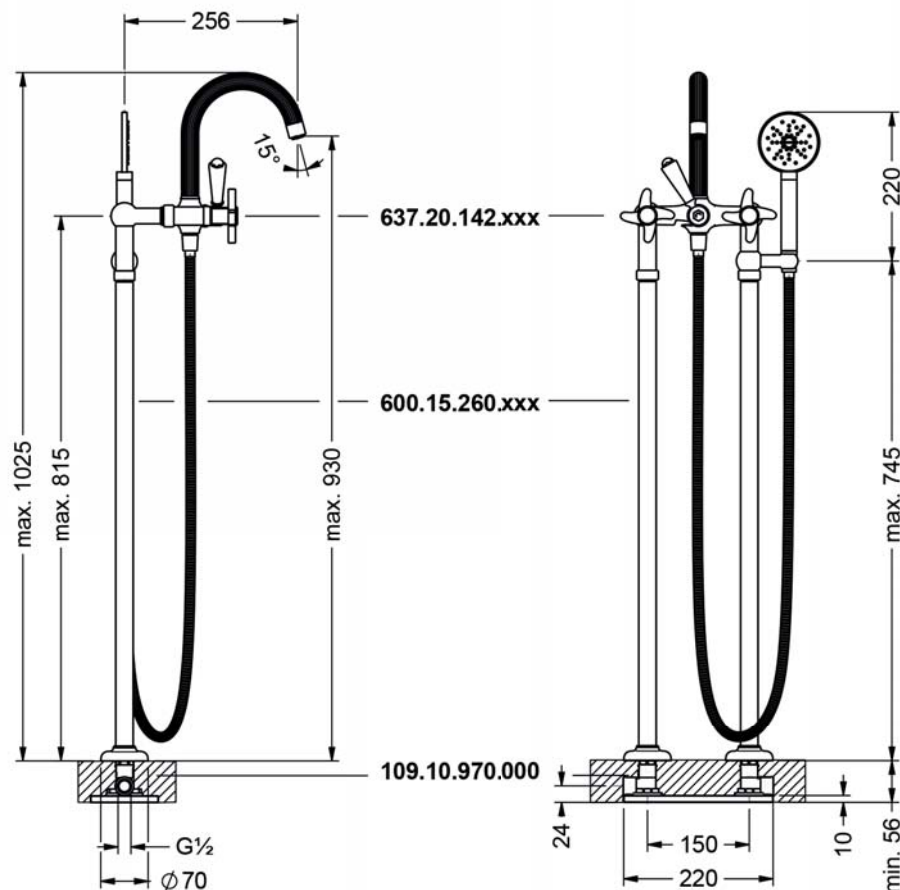


## CRONOS

109.10.970.000

Assembly set for pre-installation

- joint plate with fixing set for water supply pipes  
XXX.15.260.xxx

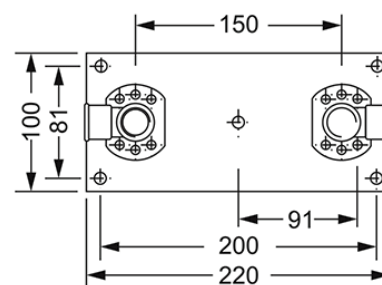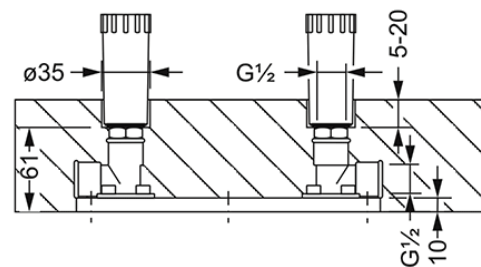


## CRONOS

637.11.100.xxx

Tub wall spout 3/4"

- wall mounting
- spout projection 230-240 mm
- fixed spout
- aerator M28x1
- special concealed wall attachment



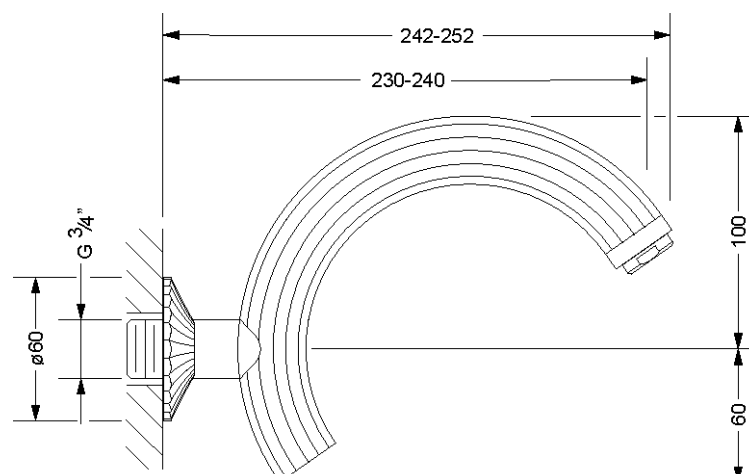


## CRONOS

637.20.205.xxx

Exposed shower mixer 1/2"

- wall mounting
- lever handles
- 2 ceramic internal upper part 1/2"
- discharge 1/2"
- concealed S-connections 1/2" x 3/4"

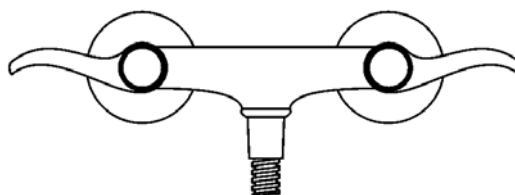

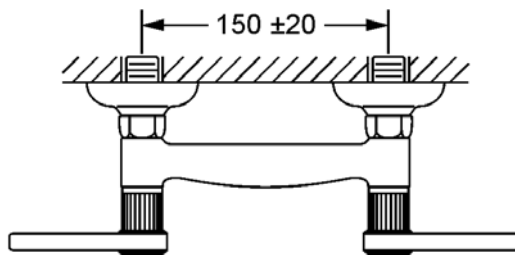


## CRONOS

637.20.200.xxx

Exposed shower mixer 1/2"

- wall mounting
- cross handles
- 2 ceramic internal upper part 1/2"
- discharge 1/2"
- concealed S-connections 1/2" x 3/4"

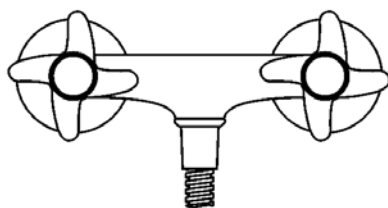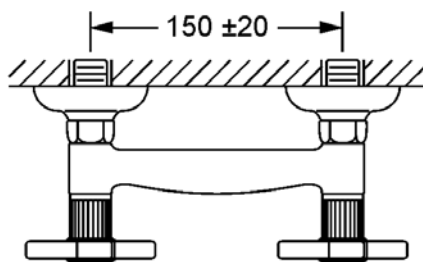




## CRONOS

637.20.255.xxx

Exposed shower thermostat 1/2"



- wall mounting
- lever handle
- cartridge with thermoelement
- heat scale and locking device at 38°C
- ceramic cartridge 1/2"

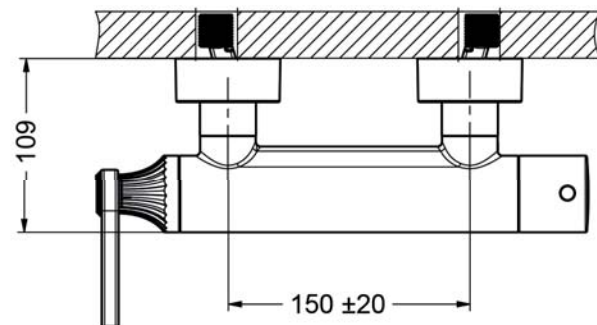
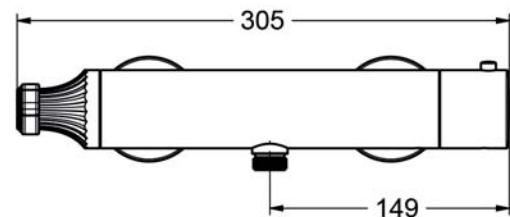
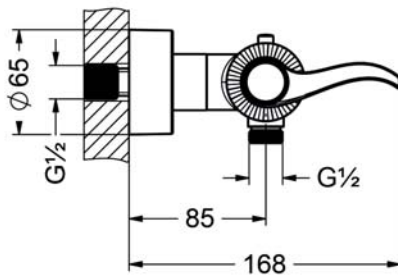


## CRONOS

637.20.250.xxx

Exposed shower thermostat 1/2"

- wall mounting
- cross handle
- cartridge with thermoelement
- heat scale and locking device at 38°C
- ceramic cartridge 1/2"

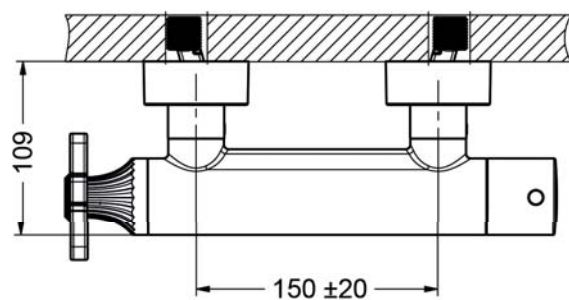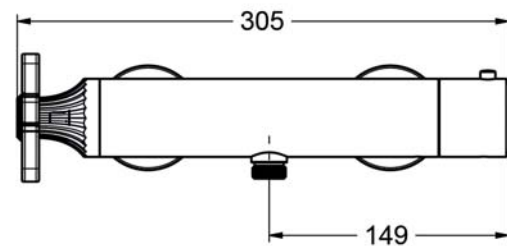

## CRONOS

637.20.417.xxx


Exposed set with shower system



- rain shower head ½", Ø 200 mm
- flow rate of the rain shower head 19 l/min at 3 bar
- full metal body with ball joint and anticalcareous system
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 360 - 380 mm
- fitting for hand shower adjustable in height and inclination
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower mixer for supply pipe ½"
- with lever handles
- 2 ceramic internal upper part ½"
- discharge ¾"
- concealed S-connections ½" x ¾"

### Consisting of:

- **649.13.920.xxx** | Rain shower head ½", Ø 200 mm
- **649.20.281.xxx** | Supply pipe, diverter, wall bracket
- **632.13.705.xxx** | Shower combination
- **637.20.215.xxx** | Exposed shower mixer ½"

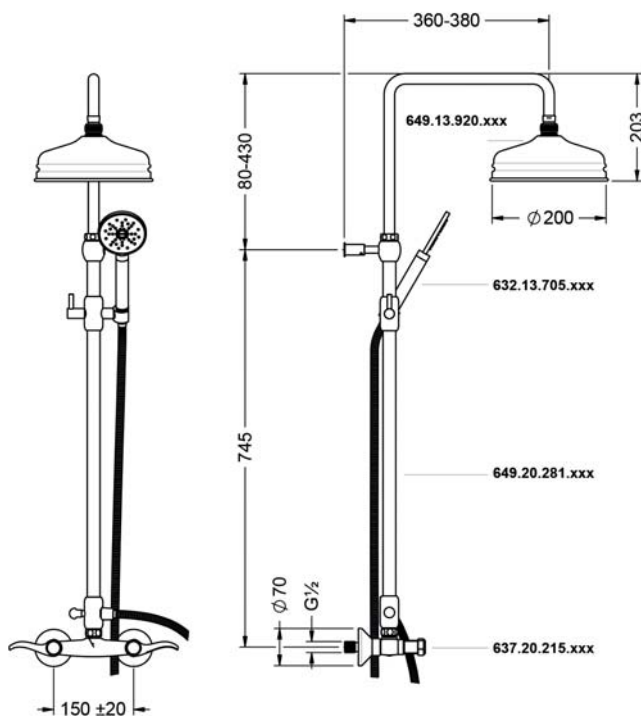

## CRONOS

637.20.412.xxx


Exposed set with shower system



- rain shower head ½", Ø 200 mm
- flow rate of the rain shower head 19 l/min at 3 bar
- full metal body with ball joint and anticalcareous system
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 360 - 380 mm
- fitting for hand shower adjustable in height and inclination
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower mixer for supply pipe ½"
- with cross handles
- 2 ceramic internal upper part ½"
- discharge ¾"
- concealed S-connections ½" x ¾"

### Consisting of:

- **649.13.920.xxx** | Rain shower head ½", Ø 200 mm
- **649.20.281.xxx** | Supply pipe, diverter, wall bracket
- **632.13.705.xxx** | Shower combination
- **637.20.210.xxx** | Exposed shower mixer ½"

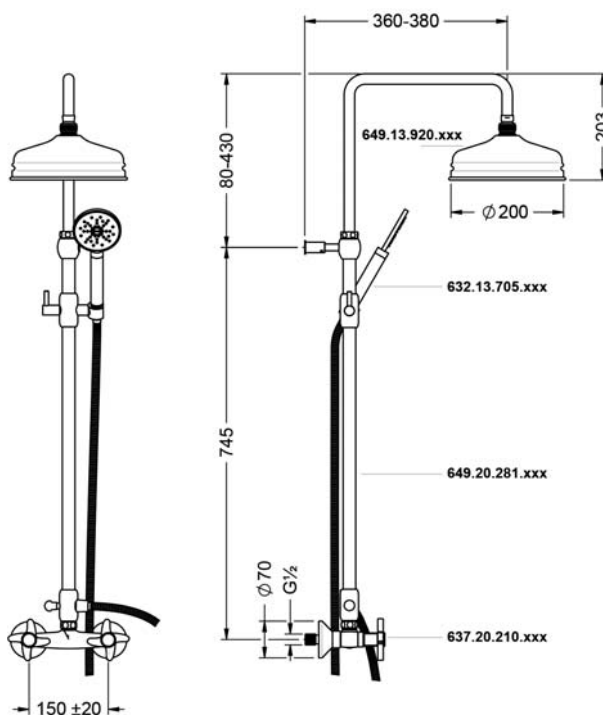

## CRONOS

637.20.467.xxx


Exposed thermostat-set with shower system 1/2"



- rain shower head 1/2", ø 200 mm
- flow rate rain shower head 19 l/min at 3 bar
- full metal body with ball joint and anticalcareous system
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 360 - 380 mm
- fitting for hand shower adjustable in height and inclination
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower thermostat for supply pipe 1/2"
- with lever handle
- cartridge with thermoelement
- locking device at 38 °C
- ceramic cartridge for flow control 1/2"
- discharge 3/4"
- concealed S-connections 1/2" x 3/4"

### Consisting of:

- **649.13.920.xxx** | Rain shower head 1/2", ø 200 mm
- **649.20.281.xxx** | Supply pipe, diverter, wall bracket
- **632.13.705.xxx** | Shower combination, complete
- **637.20.265.xxx** | Exposed shower thermostat 1/2"

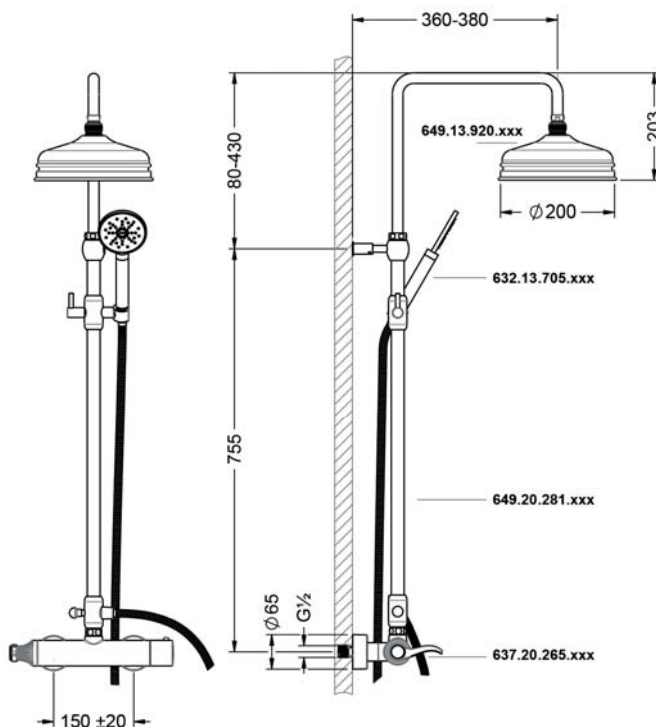

## CRONOS

637.20.462.xxx


Exposed thermostat-set with shower system 1/2"



- rain shower head 1/2", ø 200 mm
- flow rate rain shower head 19 l/min at 3 bar
- full metal body with ball joint and anticalcareous system
- supply pipe, diverter, wall bracket to connect the exposed shower mixer, spout projection 360 - 380 mm
- fitting for hand shower adjustable in height and inclination
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1500 mm, both sides with turning cone
- exposed shower thermostat for supply pipe 1/2"
- with cross handle
- cartridge with thermoelement
- locking device at 38 °C
- ceramic cartridge for flow control 1/2"
- discharge 3/4"
- concealed S-connections 1/2" x 3/4"

### Consisting of:

- **649.13.920.xxx** | Rain shower head 1/2", ø 200 mm
- **649.20.281.xxx** | Supply pipe, diverter, wall bracket
- **632.13.705.xxx** | Shower combination, complete
- **637.20.260.xxx** | Exposed shower thermostat 1/2"

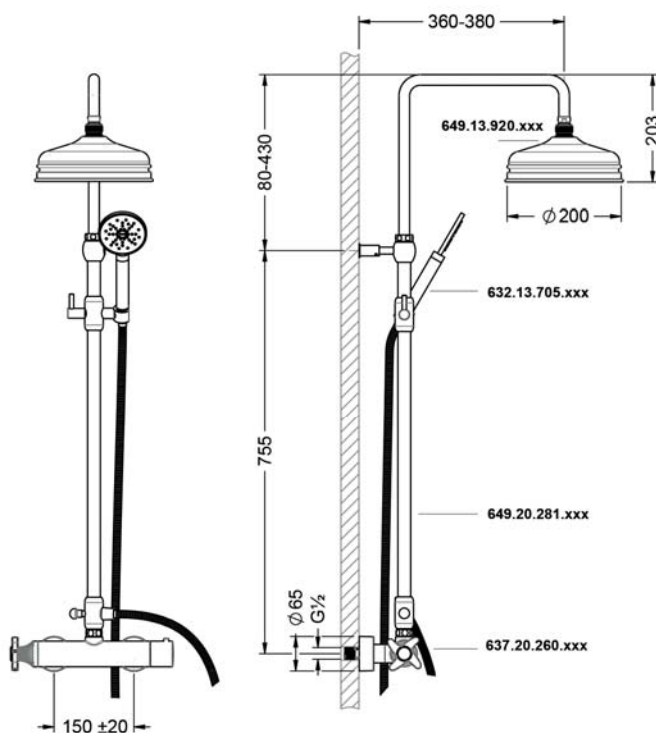

## CRONOS

637.40.380.xxx




Concealed wall thermostat with flow control, assembly set ½"



- manual two way diverter with ceramic cartridge for pressure-independent function
- with integrated volume control
- with safety device
- flow rate 20,4 l/min at 3 bar

### Required:

- **649.40.360.000** | Concealed wall box ½"

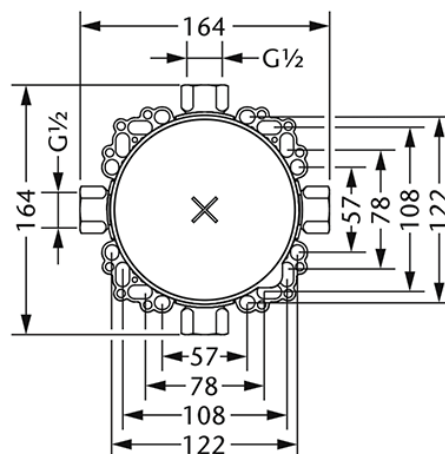

## CRONOS

637.40.360.xxx




Concealed wall thermostat with flow control, assembly set ½"



- without diverter
- with integrated ceramic cartridge for volume control
- flow rate 20,4 l/min at 3 bar

### Required:

- **649.40.360.000** | Concealed wall box ½"

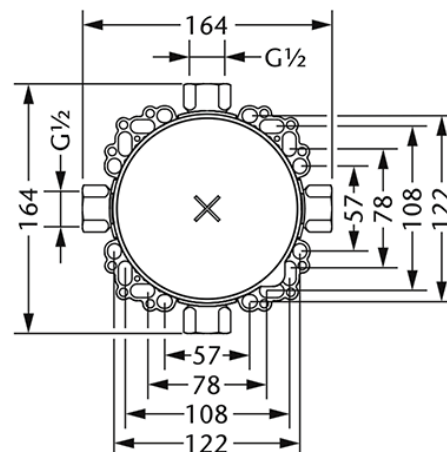

## CRONOS

637.40.460.xxx




Concealed wall thermostat without flow control, assembly set 1/2"



- functional unit without diverter
- without shut-off
- without flow control
- flow rate 28,5 l/min at 3 bar

### Required:

- **649.40.360.000** | Concealed wall box 1/2"

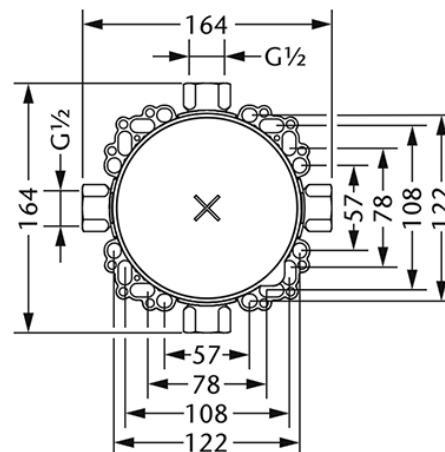


## CRONOS

649.20.612.000

Connection adapter 1/2"



- connection adapter, end plug
- for connection 649.20.610.000, 649.20.620.000, 649.20.630.000  
matching for wall box 649.40.360.000

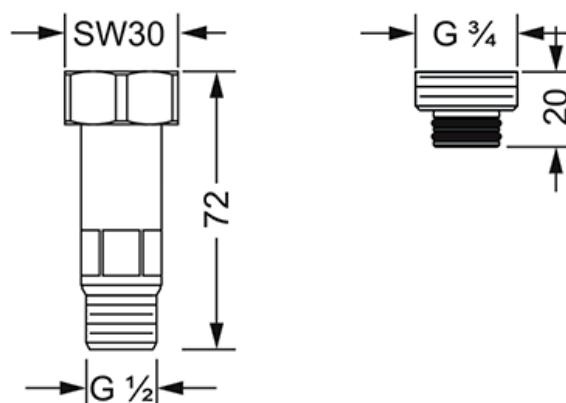


## CRONOS

649.40.360.000

Concealed wall box ½"

- for installing concealed wall thermostats ½"
- for wetwall and drywall construction

**To order a complete unit, please order the concealed wall box with an assembly set.**

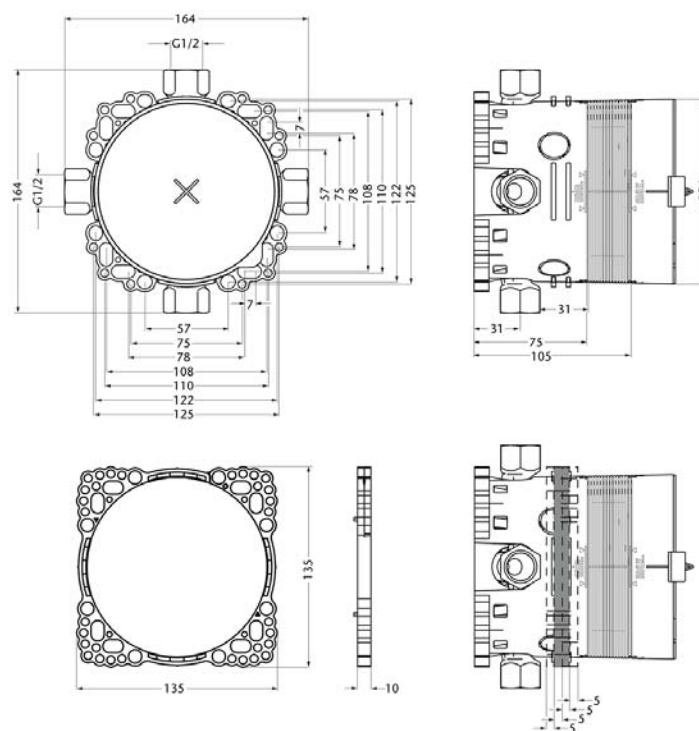

## CRONOS

637.40.560.xxx


Concealed wall thermostat without flow control, assembly set  $\frac{3}{4}$ "



- without flow control
- without diverter
- design handle for temperatur control
- locking device at 38 °C
- flow rate 64,2 l/min at 3 bar

### Required:

- **649.40.555.000** | Concealed thermostat body  $\frac{3}{4}$ "

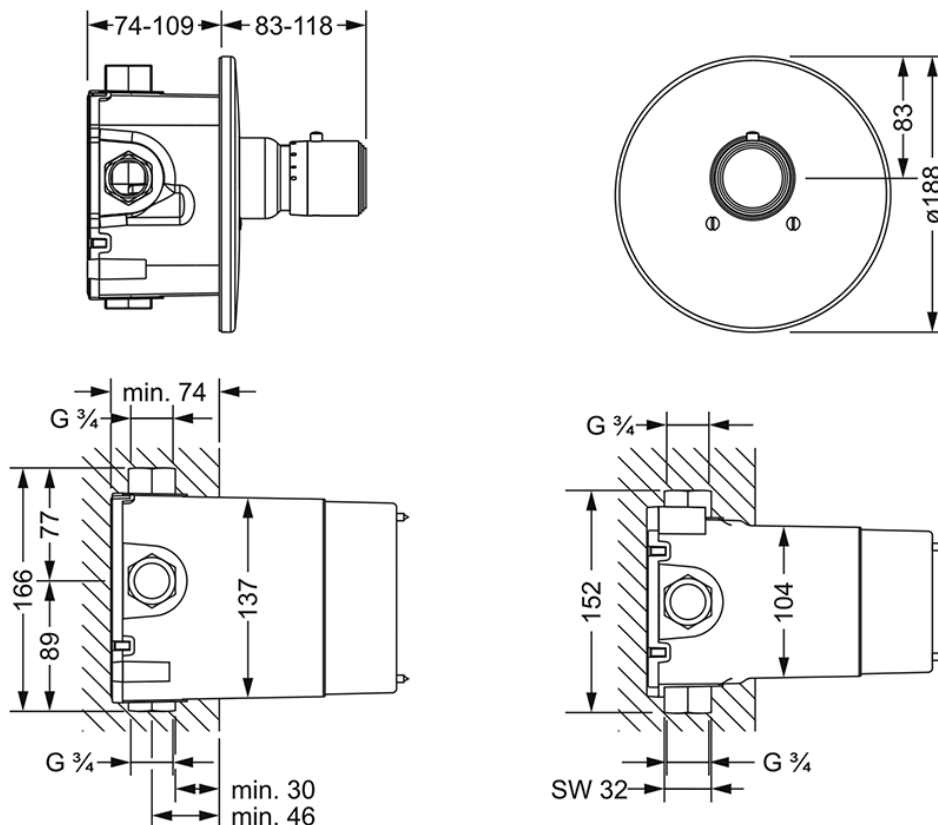



## CRONOS

649.20.634.000

Connection adapter 3/4"



- connection adapter, end plug
- for connection 649.20.610.000, 649.20.620.000, 649.20.630.000 with thermostat body 649.40.555.000

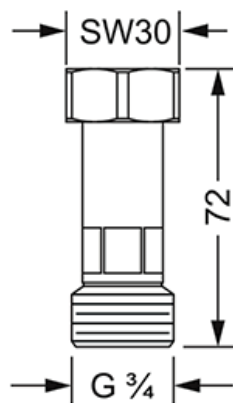



## CRONOS

649.40.555.000

Concealed thermostat body  $\frac{3}{4}$ "



- for assembly set XXX.40.555.xxx
- cartridge with filter screens
- for wetwall and drywall construction
- without shut-off
- flow rate 64,2 l/min at 3 bar

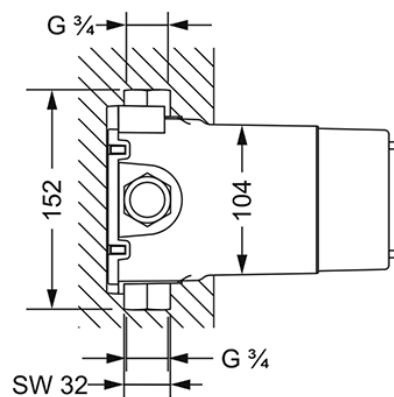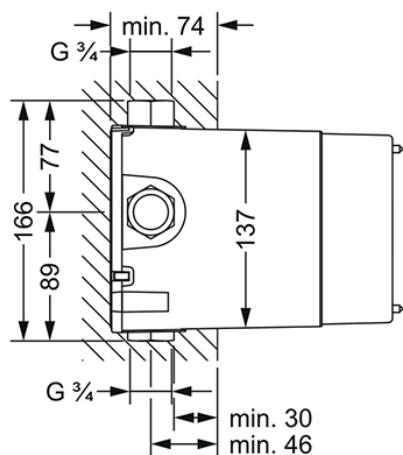

## CRONOS

637.40.520.xxx


Concealed wall thermostat without flow control, assembly set  $\frac{3}{4}$ "



- without diverter
- design handle for temperature control
- locking device at 38 °C
- flow rate 41 l/min at 3 bar

### Required:

- **649.40.520.000** | Concealed thermostat body  $\frac{3}{4}$ "

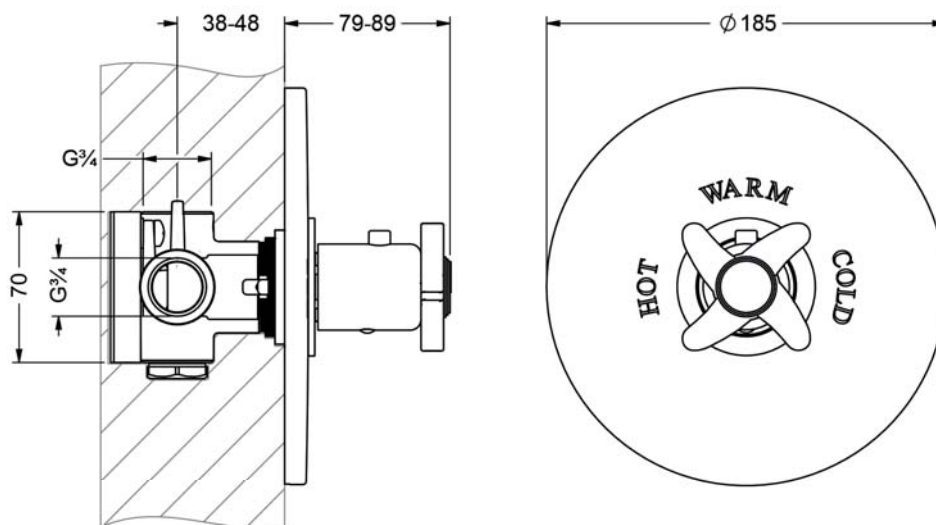



## CRONOS

649.40.520.000

Concealed thermostat body  $\frac{3}{4}$ "



- for assembly set XXX.40.520.xxx
- flow rate 41 l/min at 3 bar
- cartridge with filter screens
- for wetwall and drywall construction
- without shut-off
- fast thermal element shut-down in case of cold water loss, fast response time to reduce hot and cold spikes
- complete with mud guard for installation

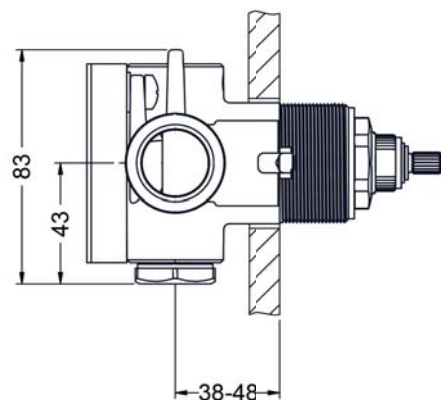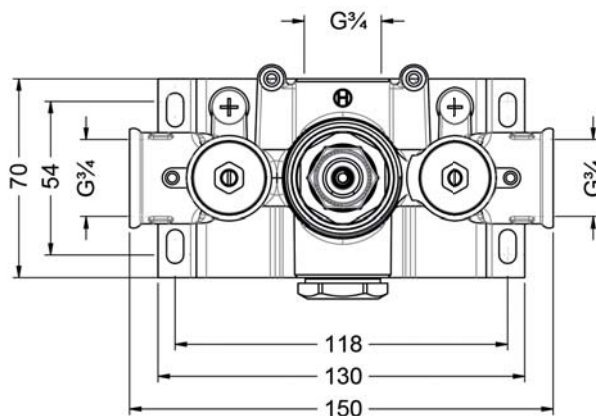

## CRONOS

637.50.235.xxx


Concealed wall valve, assembly set




- lever handle
- design handle
- socket with adjustable escutcheon
- flow rate for 1/2" 17 l/min at 3 bar
- flow rate for 3/4" 21 l/min at 3 bar

### Required:

- **649.20.350.000** | Concealed wall valve 1/2", body, clockwise closure
- **649.20.355.000** | Concealed wall valve 1/2", body, counter-clockwise closure
- **649.20.450.000** | Concealed wall valve 3/4", body, clockwise closure
- **649.20.455.000** | Concealed wall valve 3/4", body, counter-clockwise closure

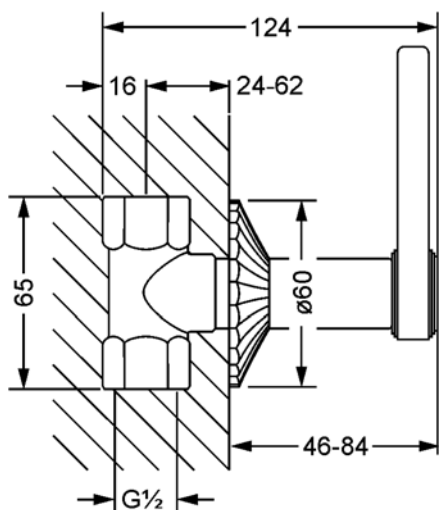

mit Einbaukörper / with concealed body 1/2"

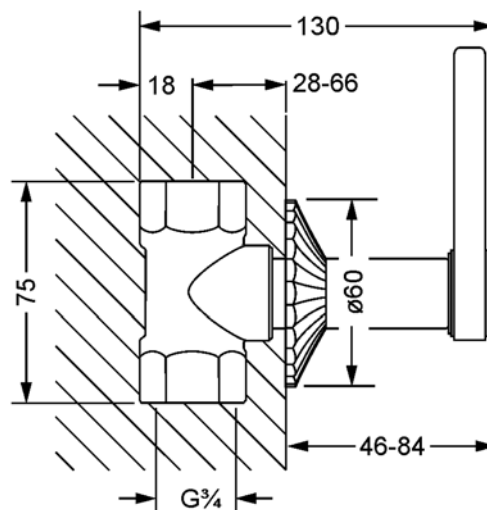

mit Einbaukörper / with concealed body 3/4"

## CRONOS

637.50.234.xxx


Concealed wall valve, assembly set




- cross handle
- design handle
- socket with adjustable escutcheon
- flow rate for 1/2" 17 l/min at 3 bar
- flow rate for 3/4" 21 l/min at 3 bar

### Required:

- **649.20.350.000** | Concealed wall valve 1/2", body, clockwise closure
- **649.20.355.000** | Concealed wall valve 1/2", body, counter-clockwise closure
- **649.20.450.000** | Concealed wall valve 3/4", body, clockwise closure
- **649.20.455.000** | Concealed wall valve 3/4", body, counter-clockwise closure

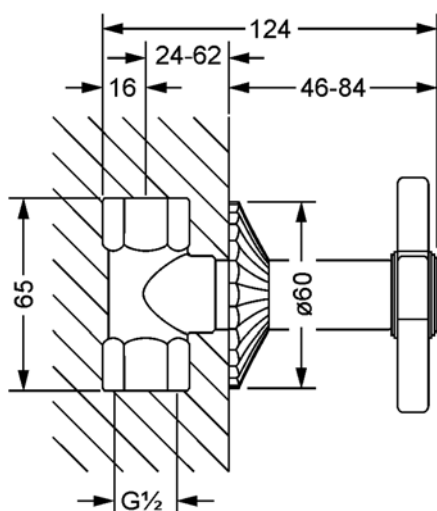

mit Einbaukörper / with concealed body 1/2"

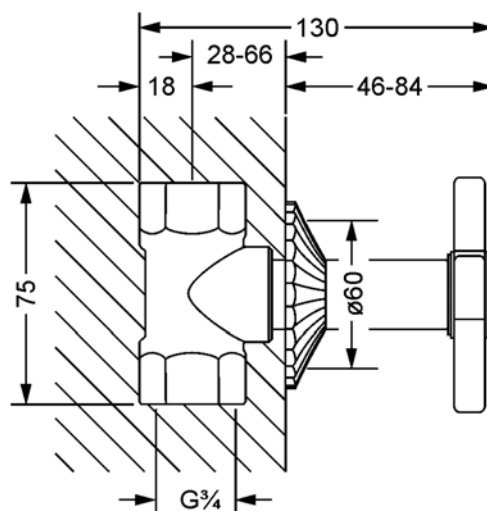


mit Einbaukörper / with concealed body 3/4"

## CRONOS

649.20.350.000

Concealed wall valve 1/2", body

- clockwise closure
- ceramic discs 1/2"
- flow rate 17 l/min at 3 bar

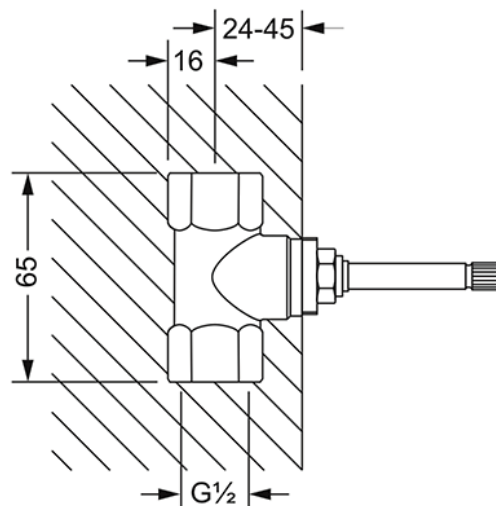


Einbaukörper 1/2"

## **CRONOS**

649.20.355.000

Concealed wall valve 1/2", body

- counter-clockwise closure
- ceramic discs 1/2"
- flow rate 17 l/min at 3 bar

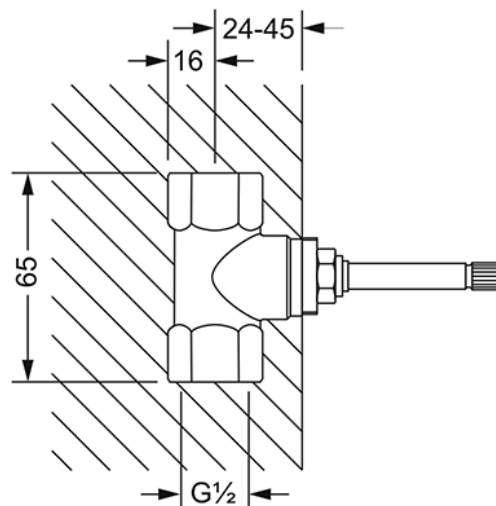


Einbaukörper 1/2"

## CRONOS

649.20.450.000

Concealed wall valve  $\frac{3}{4}$ ", body

- clockwise closure
- ceramic discs  $\frac{3}{4}$ "
- flow rate 21 l/min at 3 bar

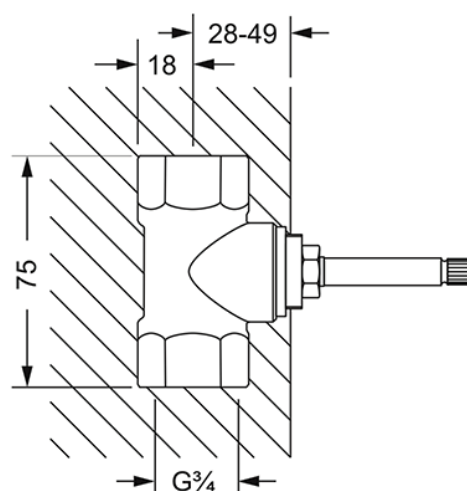


Einbaukörper  $\frac{3}{4}$ "

## CRONOS

649.20.455.000

Concealed wall valve  $\frac{3}{4}$ ", body

- counter-clockwise closure
- ceramic discs  $\frac{3}{4}$ "
- flow rate 21 l/min at 3 bar

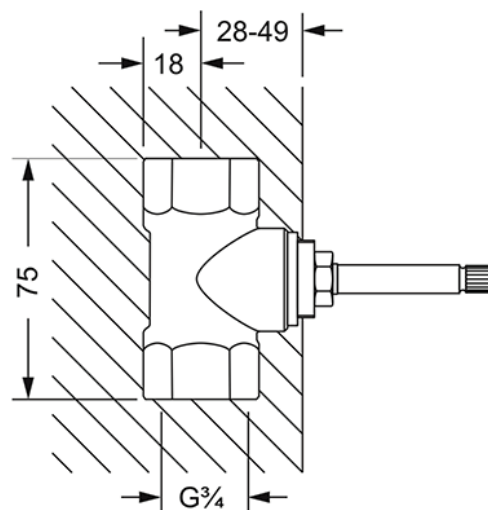

Einbaukörper  $\frac{3}{4}$ "

## CRONOS

637.60.435.xxx


Concealed wall-valve-modul assembly set



- lever handle
- escutcheon
- spindle valve  $\frac{3}{4}$ ", clockwise closure with ceramic discs
- flow rate look at installation body

### Required:

- **649.20.610.000** | Concealed wall-valve-modul, single
- **649.20.620.000** | Concealed wall-valve-modul, double
- **649.20.630.000** | Concealed wall-valve-modul, triple

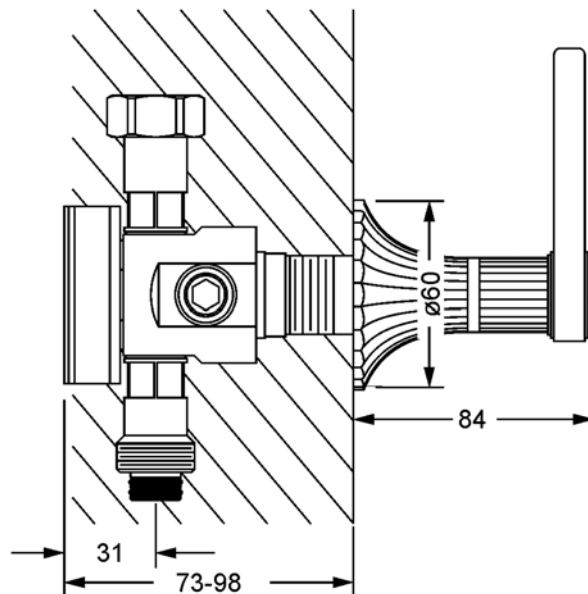

## CRONOS

637.60.432.xxx


Concealed wall-valve-modul assembly set



- cross handle
- escutcheon
- spindle valve  $\frac{3}{4}$ ", clockwise closure with ceramic discs
- flow rate look at installation body

### Required:

- **649.20.610.000** | Concealed wall-valve-modul, single
- **649.20.620.000** | Concealed wall-valve-modul, double
- **649.20.630.000** | Concealed wall-valve-modul, triple

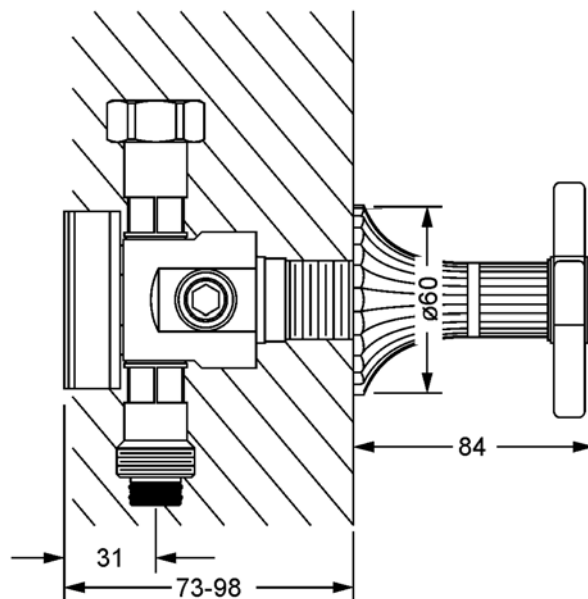

## CRONOS

649.20.610.000


Concealed wall-valve-modul, single



- 2 outlets  $\frac{1}{2}$ " each 1x right/left possible, simultaneously usable
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with  $\frac{1}{2}$ " thermostat  $\varnothing$  27,6 l/min at 3 bar
- flow rate with  $\frac{3}{4}$ " thermostat  $\varnothing$  39,2 l/min at 3 bar

**For the connection to the concealed part of the thermostat is required:**

- 649.20.612.000 | adapter  $\frac{1}{2}$ " or
- 649.20.634.000 | adapter  $\frac{3}{4}$ "

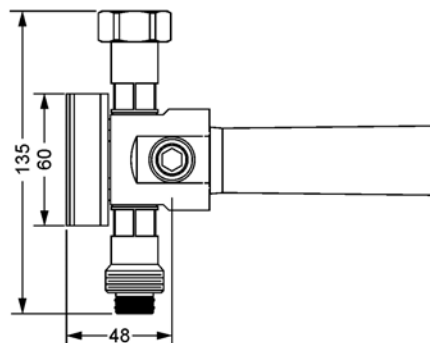

## CRONOS

649.20.620.000


Concealed wall-valve-modul, double



- 4 outlets  $\frac{1}{2}$ ", each 2x right/left possible, simultaneously usable
- precise assembly due to composite
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with  $\frac{1}{2}$ " thermostat  $\varnothing$  32,6 l/min at 3 bar
- flow rate with  $\frac{3}{4}$ " thermostat  $\varnothing$  52,7 l/min at 3 bar

**For the connection to the concealed part of the thermostat is required:**

- 649.20.612.000 | adapter  $\frac{1}{2}$ " or
- 649.20.634.000 | adapter  $\frac{3}{4}$ "

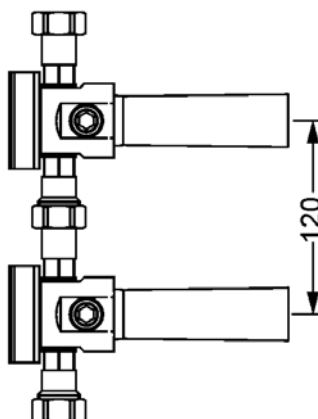

## CRONOS

649.20.630.000


Concealed wall-valve-modul, triple



- 6 outlets  $\frac{1}{2}$ " , each 3x right/left possible, simultaneously usable
- precise assembly due to composite
- the module can be used as a water outlet in the installation and can be extended by the desired number of valves
- the module is supplied with brackets for wall mounting
- flow rate with  $\frac{1}{2}$ " thermostat  $\varnothing$  33 l/min at 3 bar
- flow rate with  $\frac{3}{4}$ " thermostat  $\varnothing$  55,5 l/min at 3 bar

**For the connection to the concealed part of the thermostat is required:**

- 649.20.612.000 | adapter  $\frac{1}{2}$ " or
- 649.20.634.000 | adapter  $\frac{3}{4}$ "

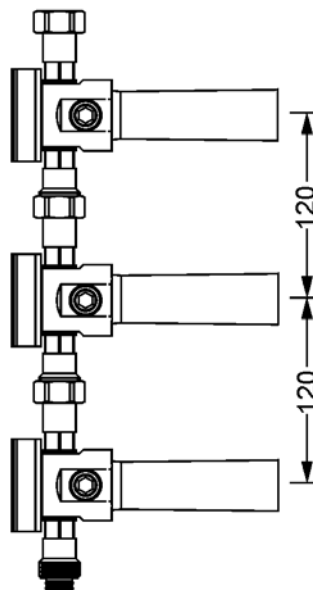

## CRONOS

637.40.655.xxx



Concealed 3-position diverter, assembly set 1/2"



- lever handle
- socket with adjustable escutcheon
- flow rate 52 l/min at 3 bar

### Required:

- 649.40.600.000 | Concealed 3-position diverter 1/2", diverter body

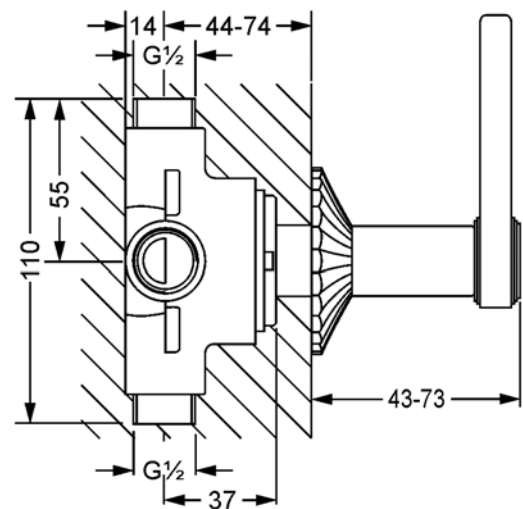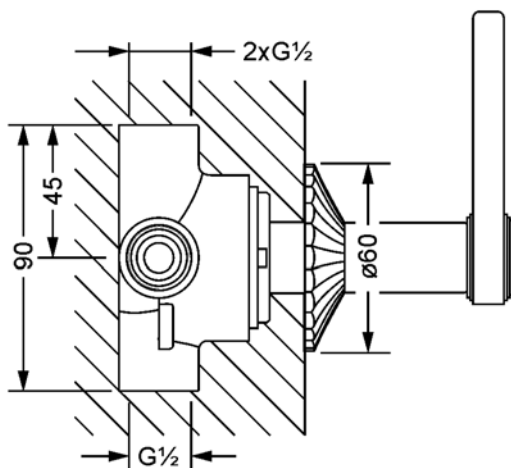

## CRONOS

637.40.650.xxx



Concealed 3-position diverter, assembly set 1/2"



- cross handle
- socket with adjustable escutcheon
- flow rate 52 l/min at 3 bar

### Required:

- 649.40.600.000 | Concealed 3-position diverter 1/2", diverter body

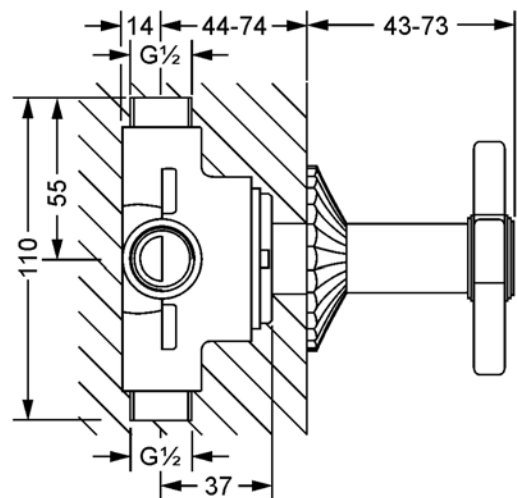
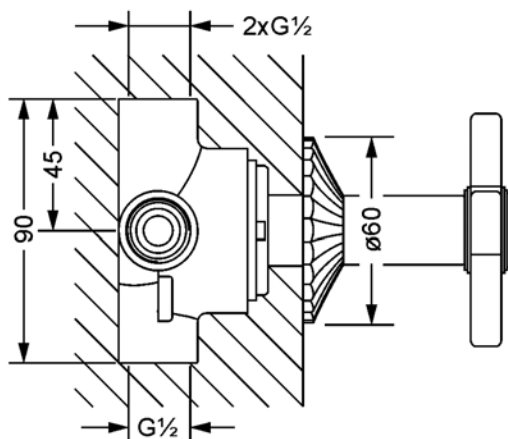


## CRONOS

649.40.600.000

Concealed 3-position diverter ½" diverter body

- for assembly set XXX.40.650.xxx
- flow rate 52 l/min at 3 bar

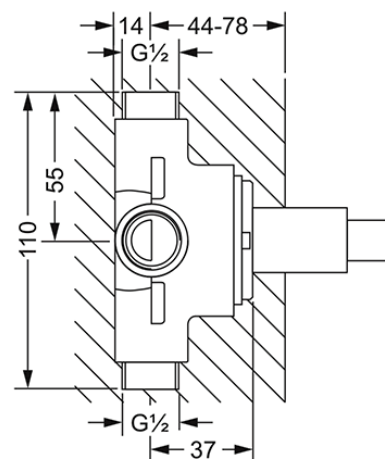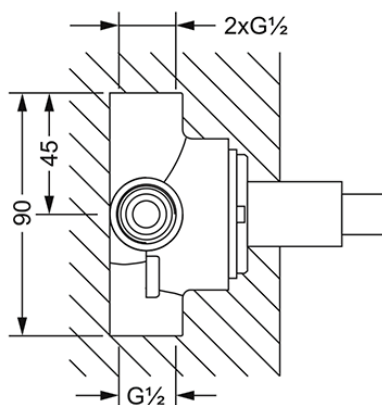


## CRONOS

637.13.302.xxx

Shower bar set, complete



- wall mounting
- wall bar 790 mm, with slider
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- metal shower hose 1.750 mm, both sides with turning cone

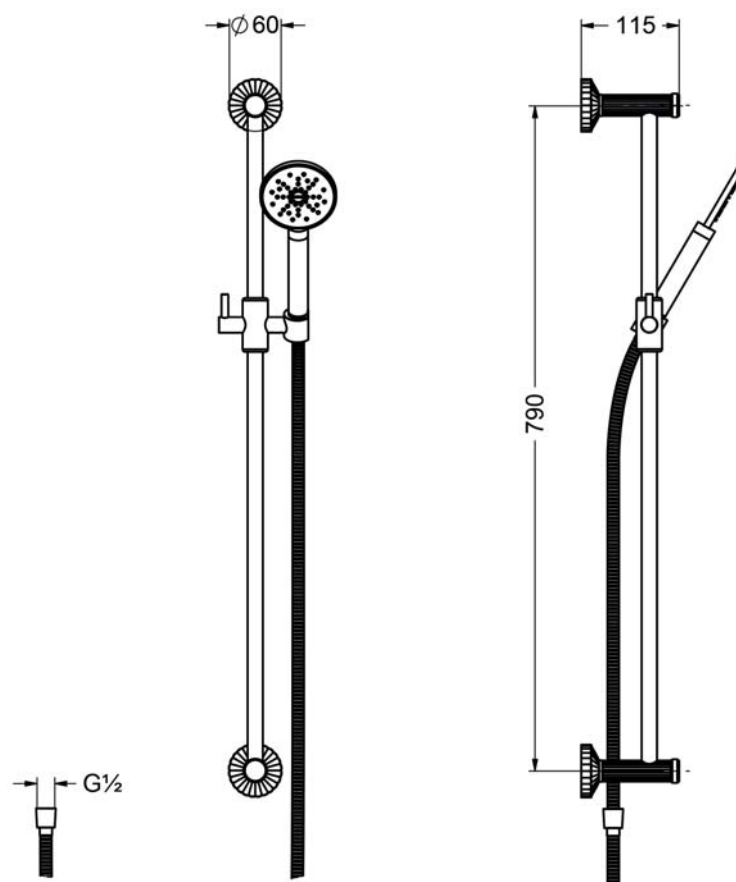


## CRONOS

637.13.212.xxx

Shower combination



- wall fitting and elbow connection 1/2"
- metal hand shower with anticalcareous system and backflow preventer
- flow rate hand shower 13,2 l/min at 3 bar
- flexible metal shower hose 1500 mm, both sides with turning cone

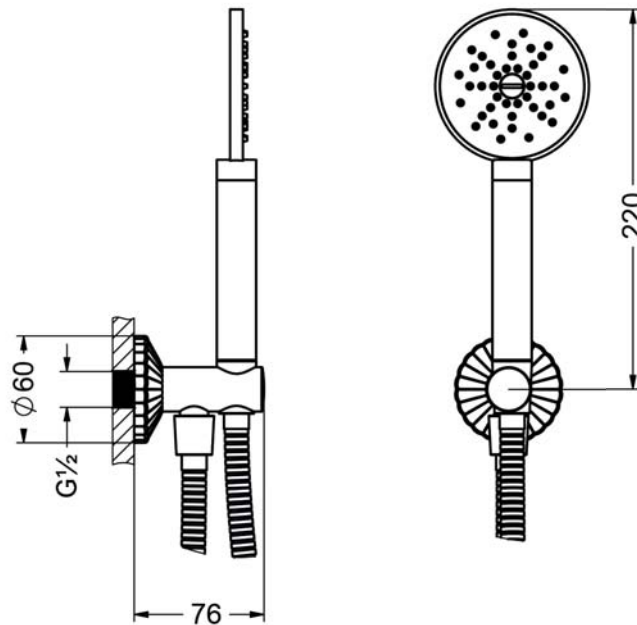


## CRONOS

637.13.150.xxx

Wall elbow connection without cradle 1/2"

- wall mounting
- discharge 1/2"
- with backflow preventer
- escutcheon


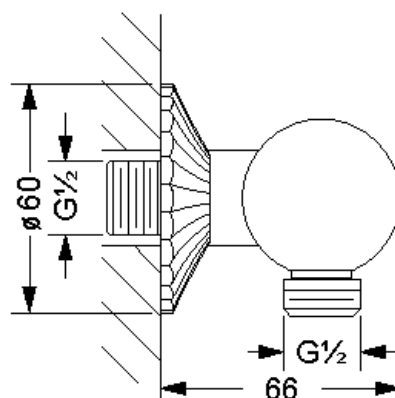


## CRONOS

649.13.270.xxx

Wall fitting for hand shower

- wall mounting
- escutcheon  $\varnothing$  60 mm

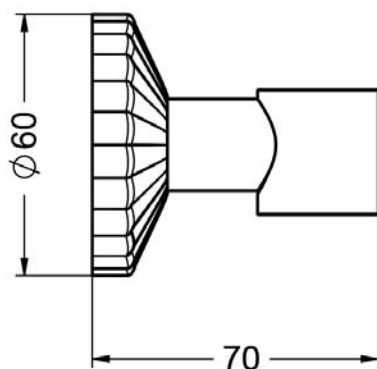



## CRONOS

637.13.237.xxx

Ablution spray combination 1/2"



- wall fitting and elbow connection 1/2"
- spray hand shower 649.13.338.xxx, completely metal
- one jet, push-lever operation
- flexible metal shower hose 1250 mm
- flow rate with water limitation 6,9 l/min

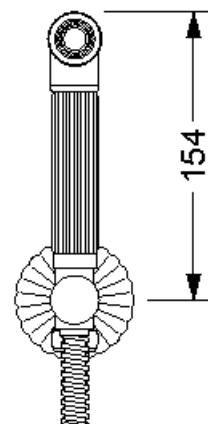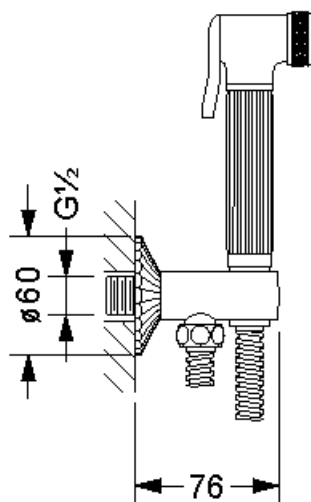

## CRONOS

637.20.237.xxx


Concealed single lever for ablution spray, assembly set ½"



- design handle
- escutcheon
- flow rate 26 l/min at 3 bar

### Required:

- **649.20.237.000** | Single lever mixer ½", concealed body


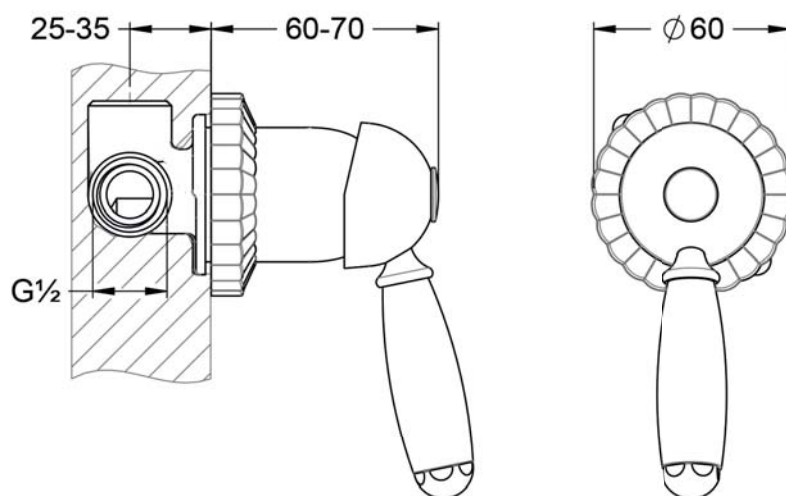


## CRONOS

649.20.237.000

Single lever mixer ½", concealed body

- cartridge with ceramic discs ½"
- for assembly set XXX.20.237.xxx
- flow rate 26 l/min at 3 bar

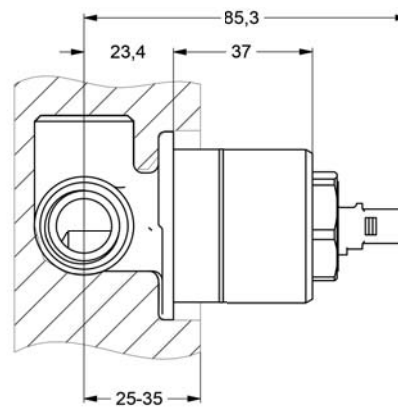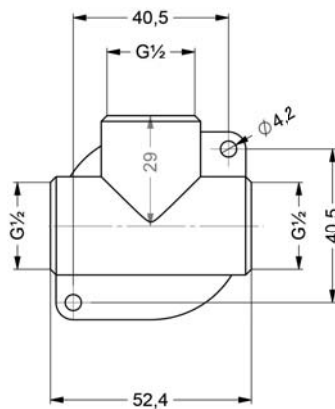

## CRONOS


649.13.930.xxx

Rain shower head ½", 300 mm



- full metal body
- with ball joint
- anticalcareous system
- flow rate 16 l/min at 3 bar
- without wall bracket

**Please order wall or ceiling bracket with the rain shower head separately.**

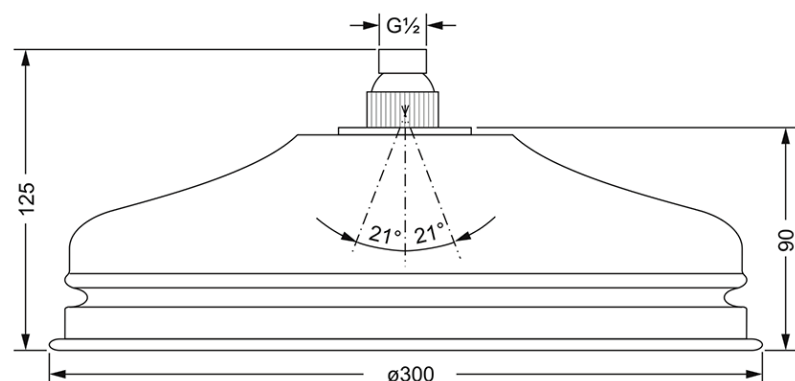


## CRONOS

637.13.625.xxx

Wall bracket 1/2"

- wall mounting
- spout projection 400 mm

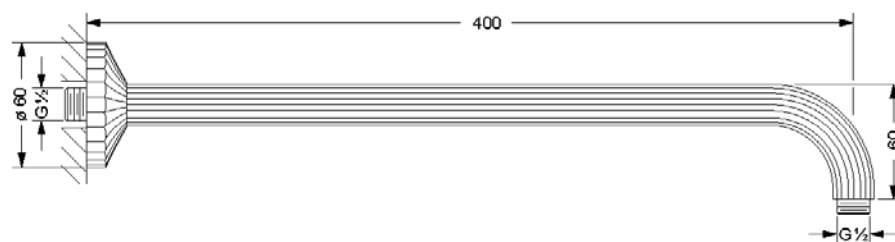

## CRONOS


649.13.615.xxx

Body spray shower head ½"



- ø 230 mm
- 75 jets
- full metal
- anticalcareous system
- swivel shower head
- with ball joint
- without wall bracket
- flow rate 18 l/min at 3 bar

- **Please order wall or ceiling bracket with the rain shower head separately.**

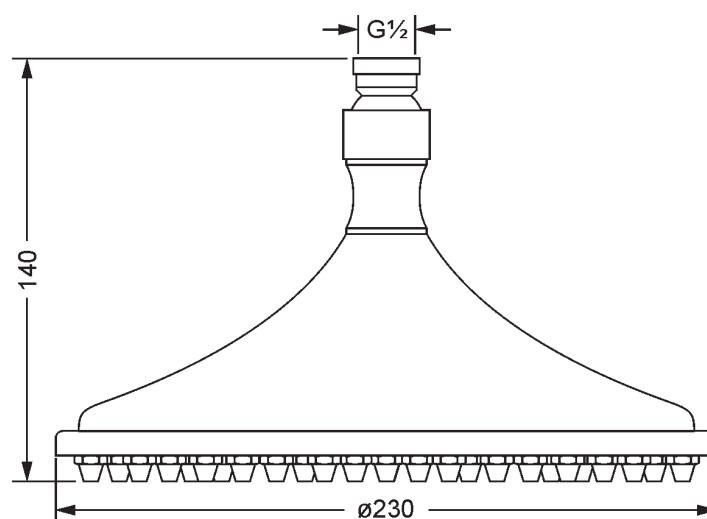


## CRONOS

649.13.625.xxx

Wall bracket 1/2"

- wall mounting
- spout projection 162 mm

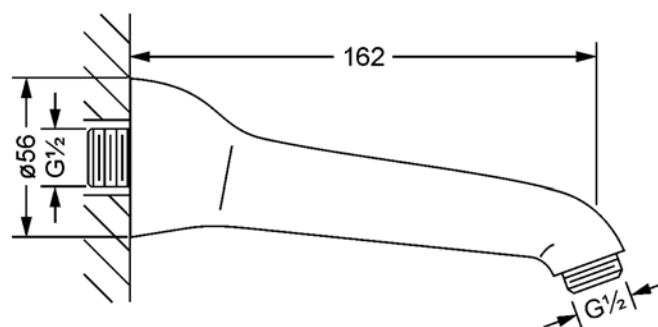


## CRONOS

649.13.519.xxx

Body spray side shower 1/2"



- wall mounting
- escutcheon ø 130 mm
- material: plastic
- swivel shower head, 20°
- anticalcareous system
- flow rate 3,6 l/min at 3 bar

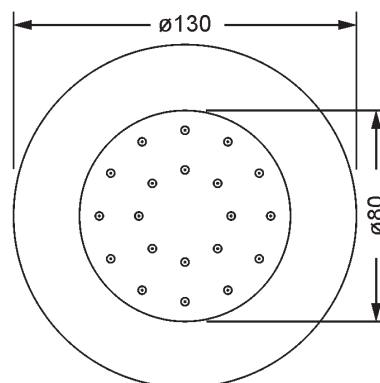


## CRONOS

649.13.395.xxx

Hand shower 1/2"



- material plastic
- anticalcareous system
- connection 1/2"
- with 3 jets: normal, hydromassage, soft
- flow rate 10,5 l/min at 3 bar

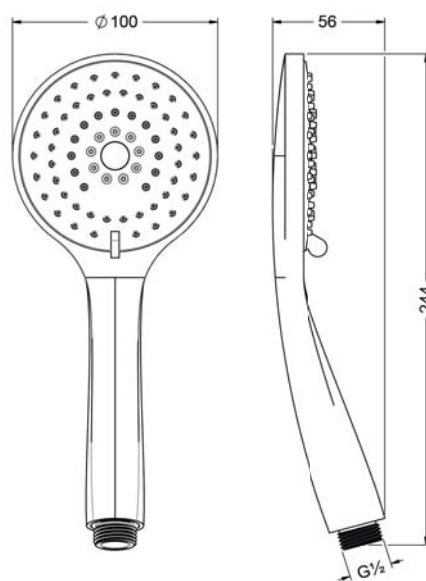



## CRONOS

649.13.391.xxx

Hand shower 1/2"



- material metal
- anticalcareous system
- connection 1/2"
- 1-spray hand shower
- flow rate 13,2 l/min at 3 bar

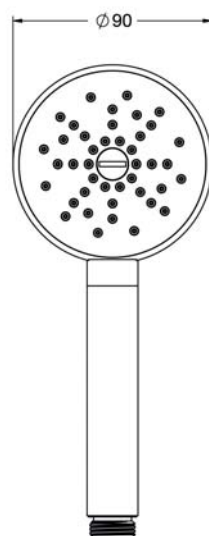


## CRONOS

637.00.002.xxx

Double towel bar

- wall model
- swivelling bars
- double
- approx. 430 mm


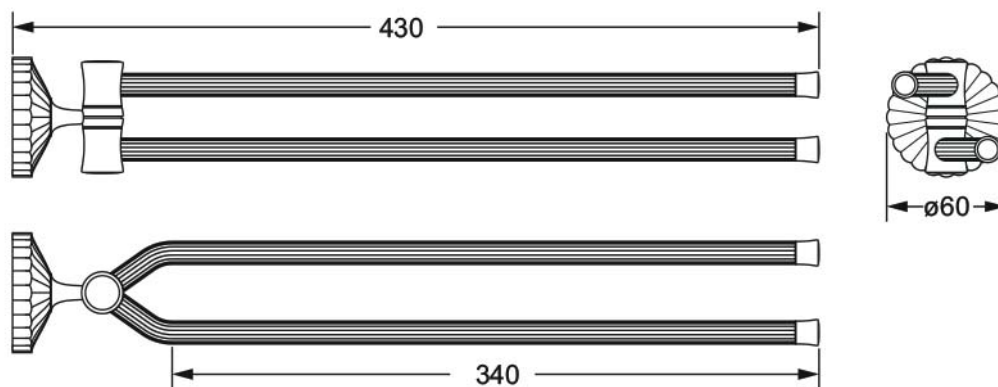


## CRONOS

637.00.047.xxx

Towel ring

- wall model
- ø 190 mm
- closed version

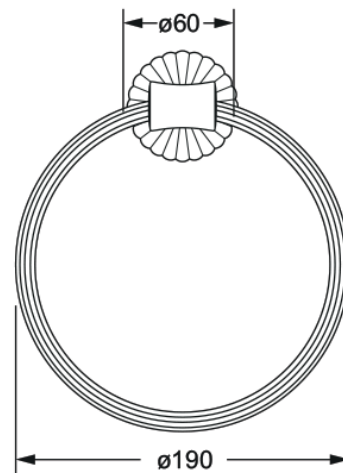
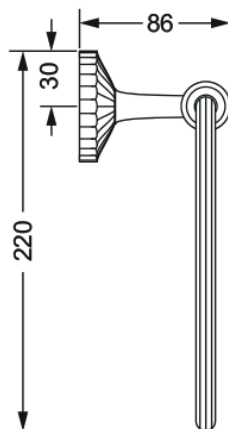


## CRONOS

637.00.022.xxx

Robe hanger

- wall model
- double




## CRONOS

637.00.040.xxx

Bath towel bar

- wall model
- 800 mm


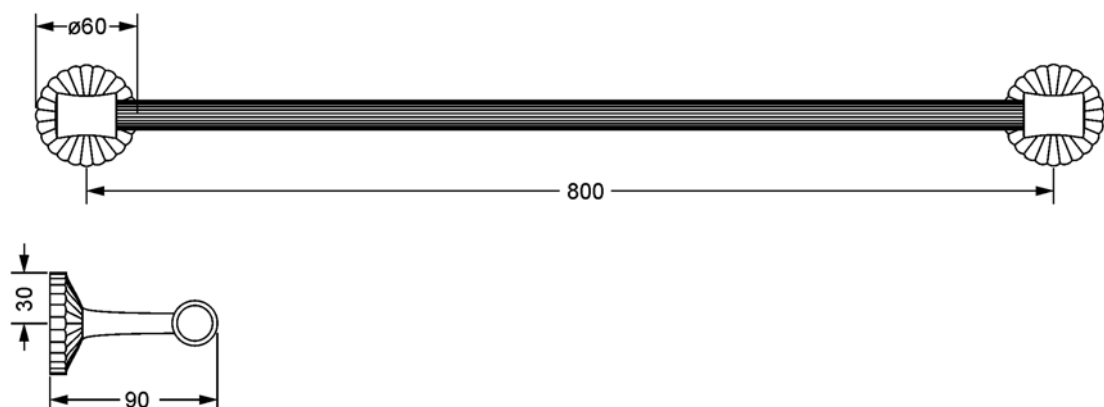


## CRONOS

637.00.030.xxx

Shower door handle

- wall model
- 580 mm

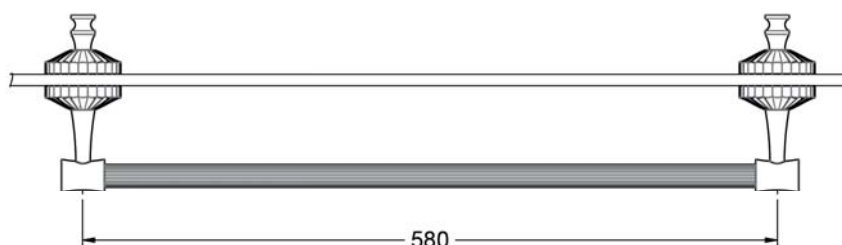



## CRONOS

637.00.031.xxx

Tub handle


- wall model
- 370 mm

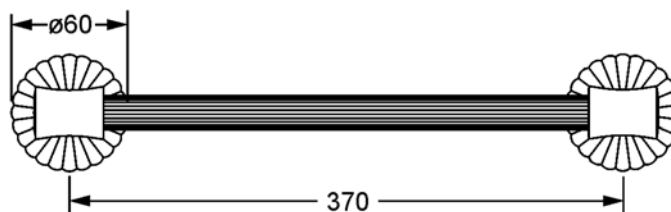



## CRONOS

637.00.104.xxx

Guest towel basket, angular

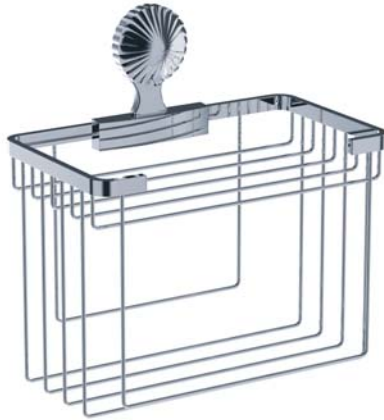

- wall model
- upper basket for clean towels
- bottom basket for used towels
- basket size 260 x 150 x 190 mm

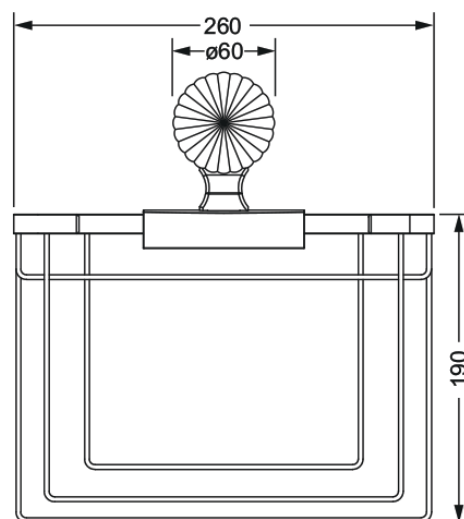
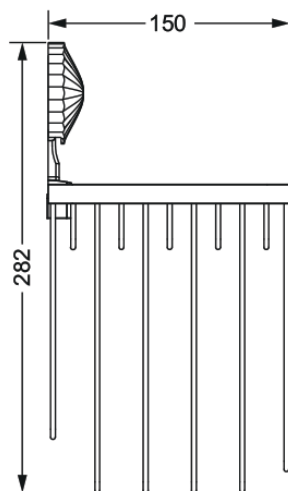


## CRONOS

637.00.007.xxx

Soap dish holder, complete

- wall model
- crystal glass dish, frosted

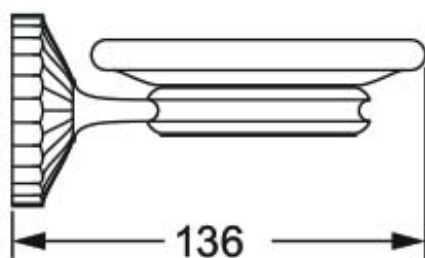


## CRONOS

631.00.017.xxx

Soap dish holder, complete

---

- free standing model
- crystal glass dish, frosted



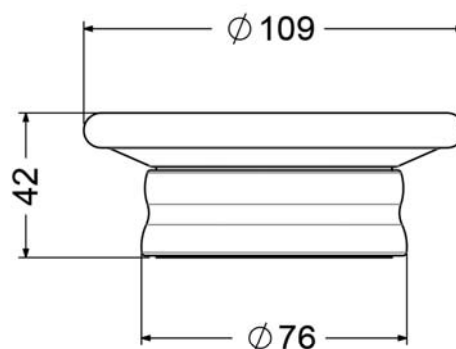


## CRONOS

637.00.105.xxx

Sponge basket

- wall model
- rectangular
- 260 x 130 mm

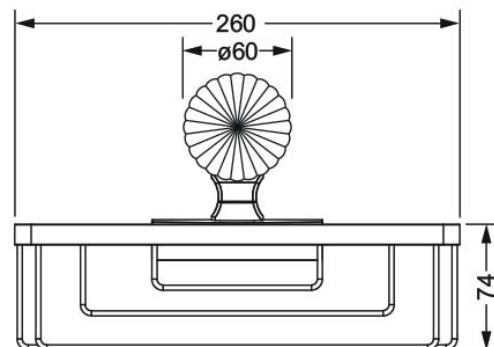
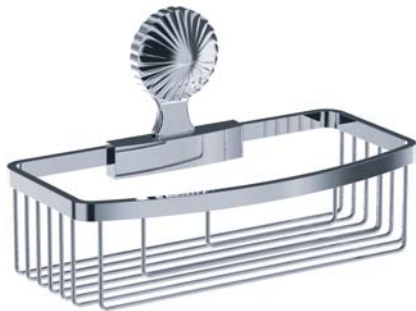


## CRONOS

637.00.106.xxx

Corner sponge basket

- wall model
- triangular
- 195 x 195 mm

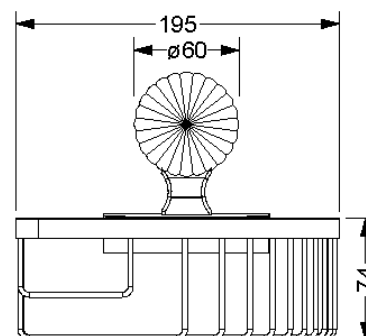
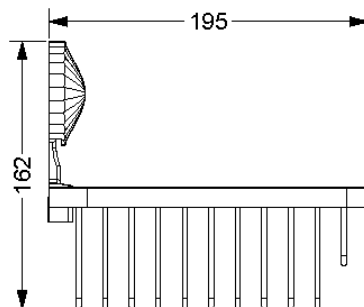


## CRONOS

637.00.006.xxx

Soap dispenser, complete

- wall model
- crystal glass, frosted

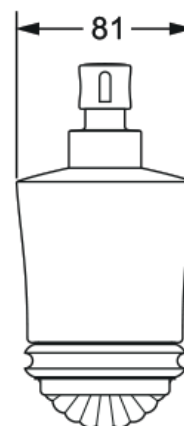
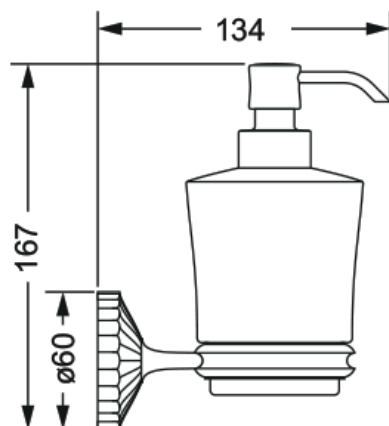


## CRONOS

631.00.016.xxx

Soap dispenser, complete

- free standing model
- crystal glass, frosted

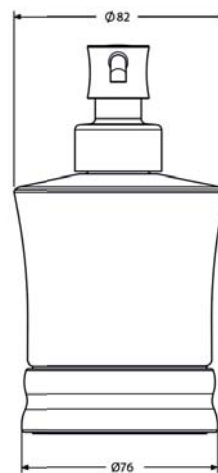
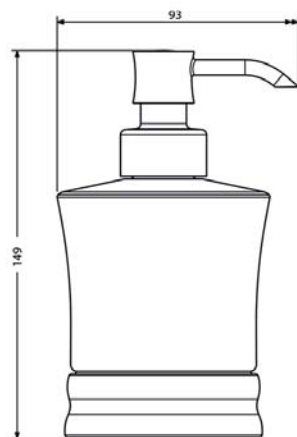


## CRONOS

637.00.036.xxx

Tumbler holder, complete

- wall model
- crystal glass tumbler, frosted

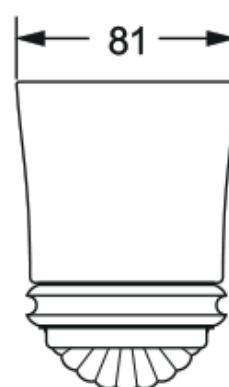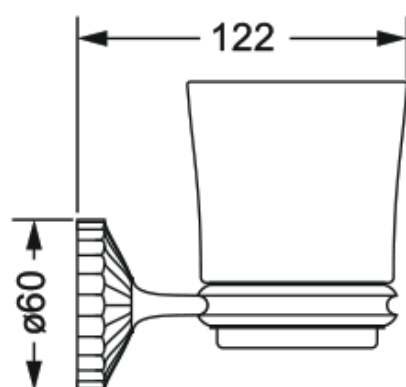


## CRONOS

631.00.046.xxx

Tumbler holder, complete

---

- free standing model
- crystal glass tumbler, frosted


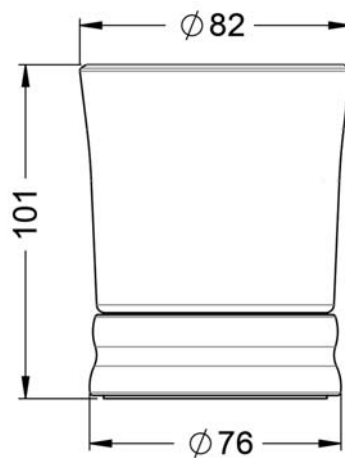


## **CRONOS**

637.00.014.xxx

Toilet paper roll holder

- wall model
- with lid

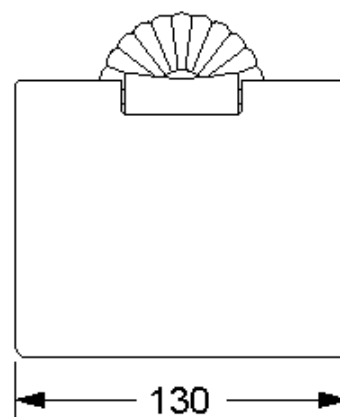
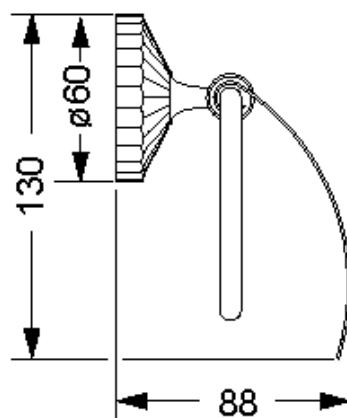


## CRONOS

637.00.024.xxx

Toilet paper roll holder

- wall model
- with shelf
- escutcheon

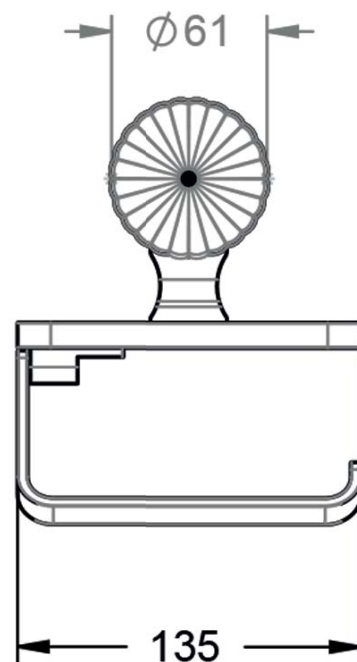
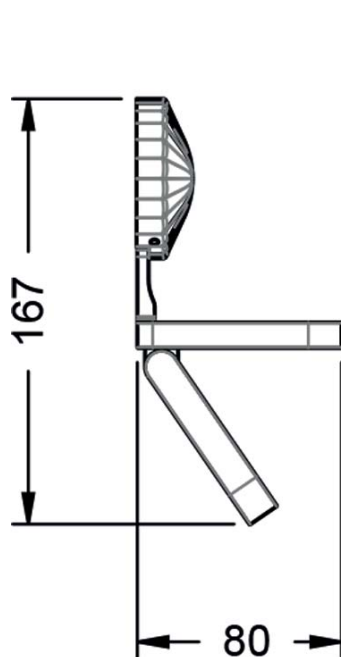


## CRONOS

632.00.024.xxx

Toilet paper roll holder

- wall model
- with shelf





## CRONOS

637.00.015.xxx

Spare toilet paper roll holder

- wall model
- for a spare roll of paper

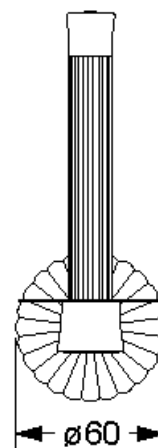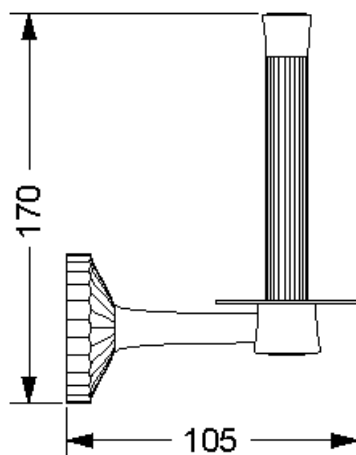



## CRONOS

637.00.000.xxx

Toilet brush holder set, complete



- wall model
- crystal glass, frosted

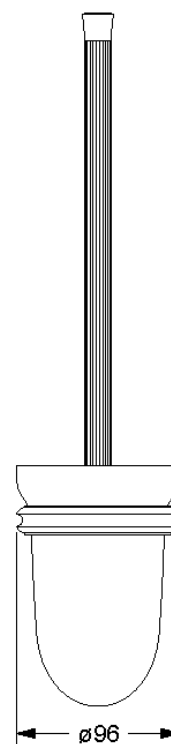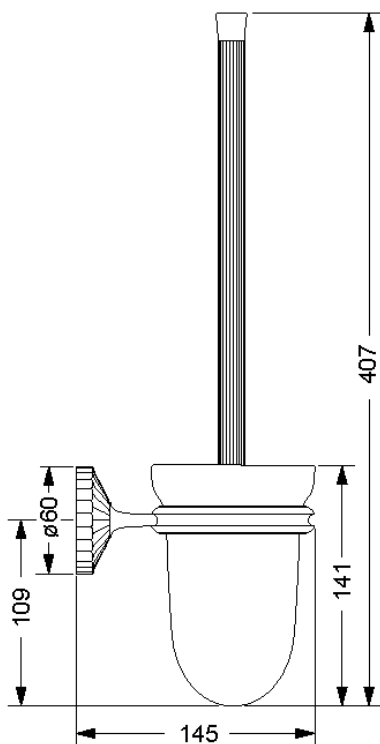

## CRONOS


631.00.001.xxx

Toilet brush holder set, complete

---



- floor standing model
- constructed of solid brass


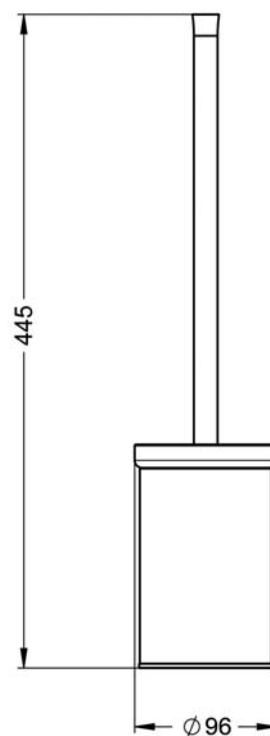


## CRONOS

637.00.061.xxx

Wall lamp, complete

- wall model
- light bulb included, 40 W

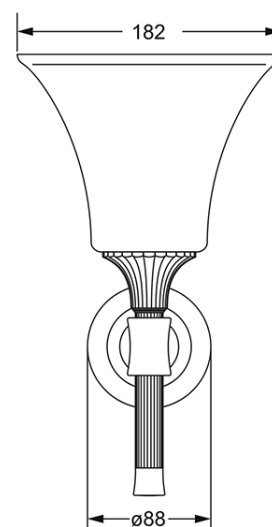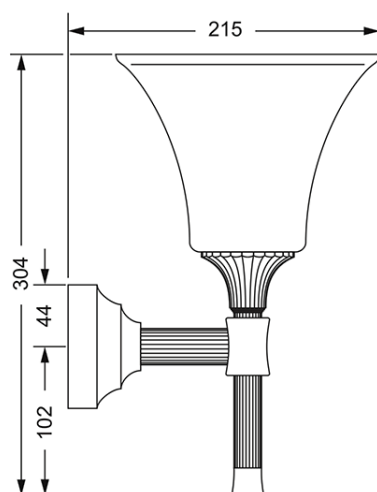

## CRONOS

649.00.414.xxx

Cosmetic mirror, inclusive lighting



- wall model
- swivelling and extendable
- magnification 3:1
- direct connection
- mirror  $\varnothing$  185 mm
- frame  $\varnothing$  250 mm
- touch control of the background light

